

## Модули IGBT ixys купить в Минске

[www.fotorele.net](http://www.fotorele.net) [www.tiristor.by](http://www.tiristor.by) радиодетали, электронные компоненты  
email [minsk17@tut.by](mailto:minsk17@tut.by) tel.mob +375 44 758 47 80 velcom +375 29 758 47 80 МТС

Мы не работаем с частными (физическими) лицами.

Мы работаем только с юридическими лицами(организациями) и ИП и только по безналичному расчёту.  
подробно смотрите ниже: описание, характеристики, datasheet QR код

## Модуль, igbt, ixys купить в Минске

[www.fotorele.net](http://www.fotorele.net) [www.tiristor.by](http://www.tiristor.by) радиодетали, электронные компоненты  
email [minsk17@tut.by](mailto:minsk17@tut.by) tel.mob +375 44 758 47 80 velcom +375 29 758 47 80 МТС

подробно смотрите ниже: описание, технические характеристики, datasheet, фото, каталог

QR код

YS



## PSC Square body fuses – Size 3X 500-700VAC End Contact Terminals

December 2013 – Issue 2

The IXYS UK range of 700V/690V protistor fuse links provides maximum flexibility in equipment design and ultimate protection for today's power conversion equipment. These square body fuse links are available in different body sizes, each size having multiple worldwide acceptable mounting styles.

These protistors have been designed to provide state-of-the-art protection for all IXYS UK high power semiconductors; diodes, thyristors, GTO's and IGBT devices. These fuses are assembled with pure silver, die-cut elements embedded in solidified sand, which helps control arcing characteristics for a lower  $I^2t$  and high interrupting rate level. All contact surfaces are silver plated and all hardware is non-magnetic

Each fuse link is equipped with a low voltage trip indicator which can operate a field mountable microswitch.



### Features and Benefits

- Ultra-fast acting
- Current limiting
- Very low  $I^2t$  for improved semiconductor protection
- Superior cycling capability
- Multiple body sizes and end contact terminals
- aR class according to VDE 636-23 and IEC 60269-4

### Applications

Protection of inverters, UPS systems, motor drives and similar equipment rated at 700V/690V or less

### Approvals

- UL/CSA recognised component
- AC: UL guide no. E76491
- IEC 60269-4 compliance
- RoHS compliant



**Nomenclature**

The IXYS UK range of 700V/690V protistor fuse links with end contact terminals consists of two different body styles and the following nomenclature details the breakdown of each type

1	2	3	4	5	6
<b>070</b>	<b>US</b>	<b>3</b>	<b>U</b>	<b>0800</b>	<b>B</b>
Rated voltage ÷ 10	Type and standard	Size	Fixing dimension	RMS current rating	Indicator type

**Type and Standard Information**

US – DIN 43 653 US dimensions, large square body

UR – DIN 43 653, German/French dimensions, large square body

**Body Size**

0 – 30

1 – 31

2 – 32

3 - 33

**Fixing Dimension**

S – Stud/threaded hole, metric thread

U – Stud/threaded hole, imperial thread

**Indicator Type**

B – Button type

**Example**

070US3U0800B is – 700V/690VAC (RMS), DIN 43-635 US dimensions, large square body, size 33, stud/threaded hole, imperial threads, 800A nominal RMS current with button indicator

**Size 30 fuses – Part numbers**

Weight – 245g Max.

**US0U fuses – US dimensions**

Rated Voltage (UL/IEC) V	Nominal Current A	Class	Part Number
700/690	50	aR	070US0U0050B
700/690	63	aR	070US0U0063B
700/690	80	aR	070US0U0080B
700/690	100	aR	070US0U0100B
700/690	125	aR	070US0U0125B
700/690	160	aR	070US0U0160B
700/690	200	aR	070US0U0200B
700/690	250	aR	070US0U0250B
700/690	315	aR	070US0U0315B
700/690	350	aR	070US0U0350B
700/690	400	aR	070US0U0400B
700/690	450	aR	070US0U0450B
700/690	500	aR	070US0U0500B
700/690	550	aR	070US0U0550B
650/600	630	aR	065US0U0630B

**UROS fuses – UR dimensions**


Rated Voltage (UL/IEC) V	Nominal Current A	Class	Part Number
700/690	50	aR	069UROS0050B
700/690	63	aR	069UROS0063B
700/690	80	aR	069UROS0080B
700/690	100	aR	069UROS0100B
700/690	125	aR	069UROS0125B
700/690	160	aR	069UROS0160B
700/690	200	aR	069UROS0200B
700/690	250	aR	069UROS0250B
700/690	315	aR	069UROS0315B
700/690	350	aR	069UROS0350B
700/690	400	aR	069UROS0400B
700/690	450	aR	069UROS0450B
700/690	500	aR	069UROS0500B
700/690	550	aR	069UROS0550B
650/600	630	aR	060UROS0630B

\* - Non UL recognised rating


**Size 30 fuses – Rating and curves**

Rated Voltage (UL/IEC) V	Nominal Current A	Class	Pre-arcing $I^2t$ kA <sup>2</sup> s	Clearing $I^2t$ @ rated voltage kA <sup>2</sup> s	Watts loss @ 100% In W	Breaking capacity @ rated voltage kA
700/690	50	aR	0.116	0.62	9	200
700/690	63	aR	0.2	1.1	14	200
700/690	80	aR	0.33	1.8	19	200
700/690	100	aR	0.47	2.5	26	200
700/690	125	aR	0.85	4.5	30	200
700/690	160	aR	1.6	8.5	37	200
700/690	200	aR	3	15.5	43	200
700/690	250	aR	5.8	30	50	200
700/690	315	aR	12	62	55	200
700/690	350	aR	15.5	80	60	200
700/690	400	aR	23	120	65	200
700/690	450	aR	26	150	88	200
700/690	500	aR	41	240	88	200
700/690	550	aR	52	300	90	200
650/600	630	aR	84	450	95	200


Time/Current characteristics

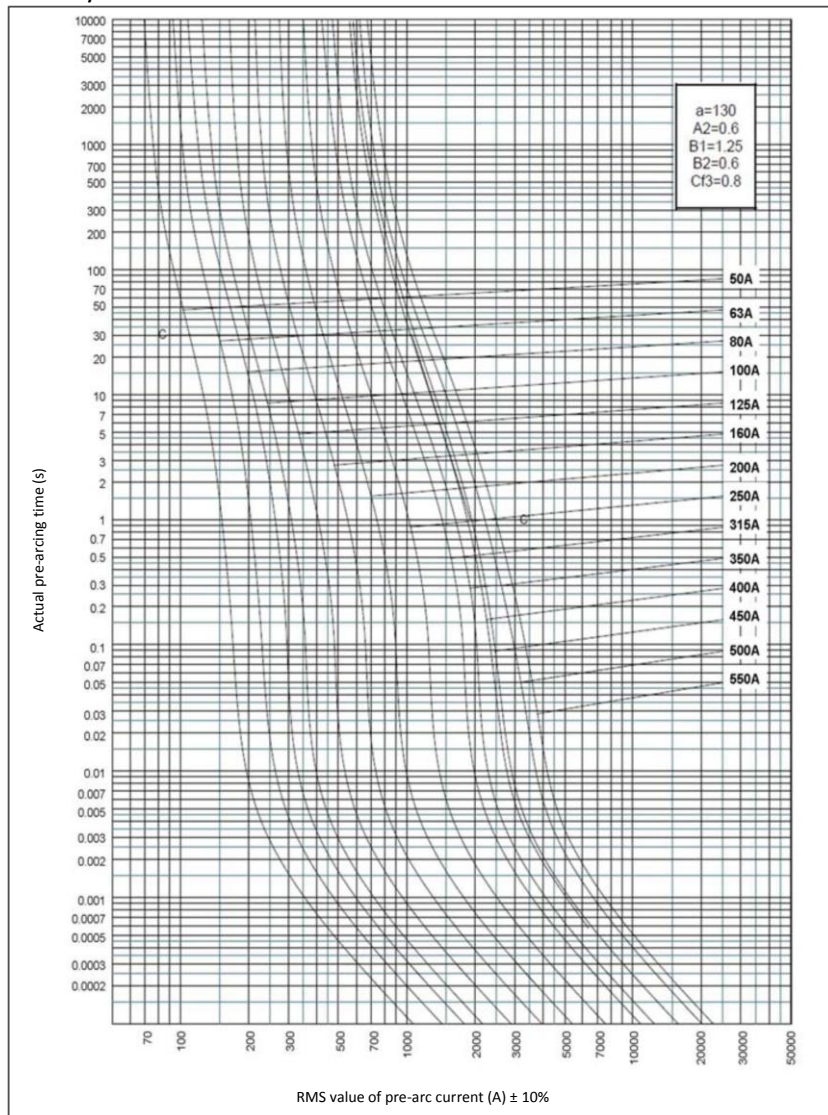


Peak arc voltage

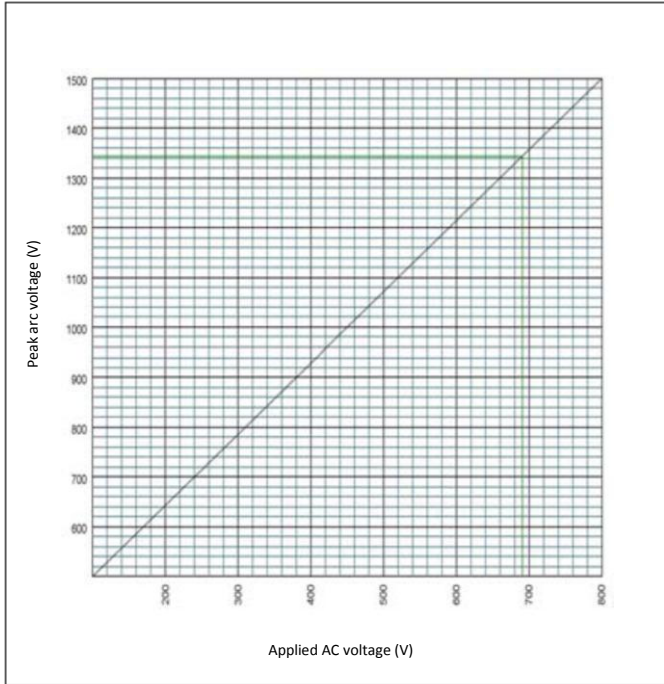


$I^2t$  multiplier coefficient

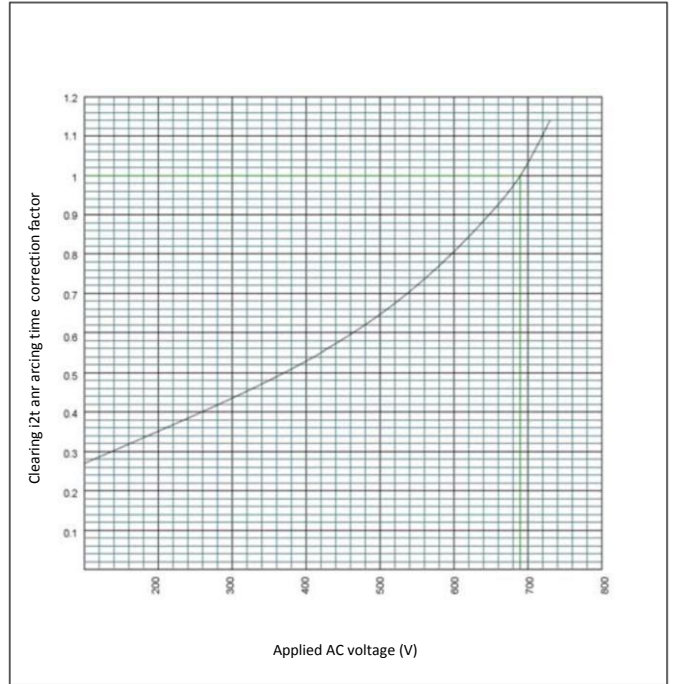

L/R time constant Vs. DC voltage capability

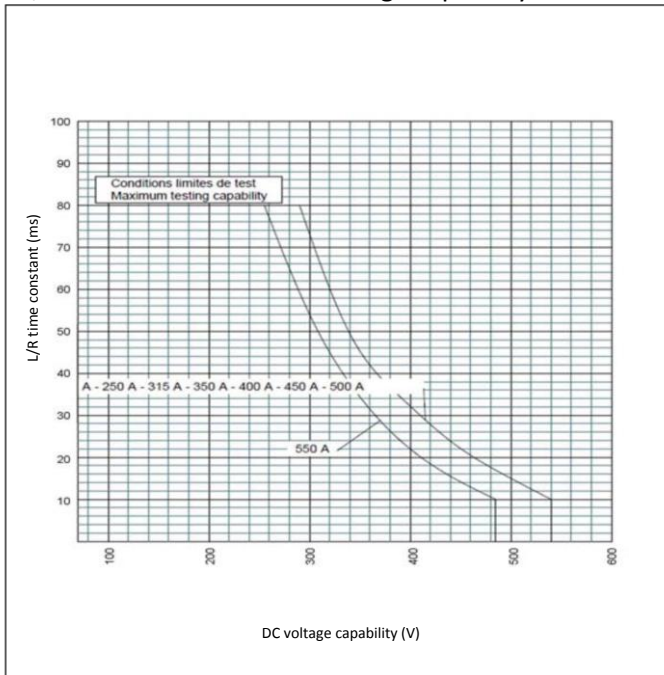

Peak let thru characteristics

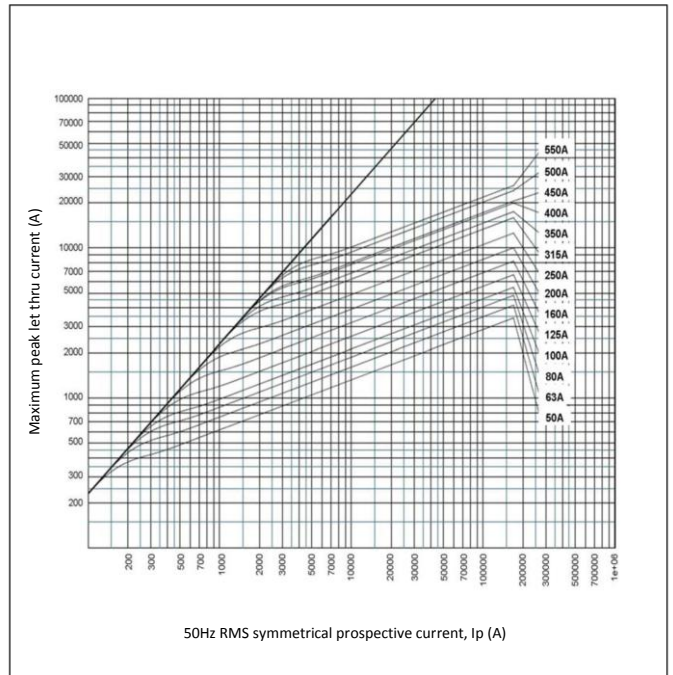

**Size 31 fuses – Part numbers**

Weight – 370g Max.

**US1U fuses – US dimensions**

Rated Voltage (UL/IEC) V	Nominal Current A	Class	Part Number
700/690	200	aR	070US1U0200B
700/690	250	aR	070US1U0250B
700/690	315	aR	070US1U0315B
700/690	350	aR	070US1U0350B
700/690	400	aR	070US1U0400B
700/690	450	aR	070US1U0450B
700/690	500	aR	070US1U0500B
700/690	550	aR	070US1U0550B
700/690	630	aR	065US1U0630B
700/690	700	aR	070US1U0700B
700/690	800	aR	070US1U0800B

**UR1S fuses – UR dimensions**


Rated Voltage (UL/IEC) V	Nominal Current A	Class	Part Number
700/690	160	aR	069UR1S0160B*
700/690	200	aR	069UR1S0200B
700/690	250	aR	069UR1S0250B
700/690	315	aR	069UR1S0315B
700/690	350	aR	069UR1S0350B
700/690	400	aR	069UR1S0400B
700/690	450	aR	069UR1S0450B
700/690	500	aR	069UR1S0500B
700/690	550	aR	069UR1S0550B
700/690	630	aR	069UR1S0630B
700/690	700	aR	069UR1S0700B
700/690	800	aR	069UR1S0800B

\* - Non UL recognised rating

**Size 31 fuses – Rating and curves**


Rated Voltage (UL/IEC) V	Nominal Current A	Class	Pre-arcing I <sup>2</sup> t kA <sup>2</sup> s	Clearing I <sup>2</sup> t @ rated voltage kA <sup>2</sup> s	Watts loss @ 100% In W	Breaking capacity @ rated voltage kA
700/690	160	aR	1.3	7	35	200
700/690	200	aR	2.6	13.5	45	200
700/690	250	aR	4.7	25	52	200
700/690	315	aR	7.5	40	65	200
700/690	350	aR	10.5	55	67	200
700/690	400	aR	19	100	68	200
700/690	450	aR	26.5	140	70	200
700/690	500	aR	37	195	72	200
700/690	550	aR	52	280	75	200
700/690	630	aR	75	390	85	200
700/690	700	aR	95	490	95	200
700/690	800	aR	140	800	120	200

Time/Current characteristics

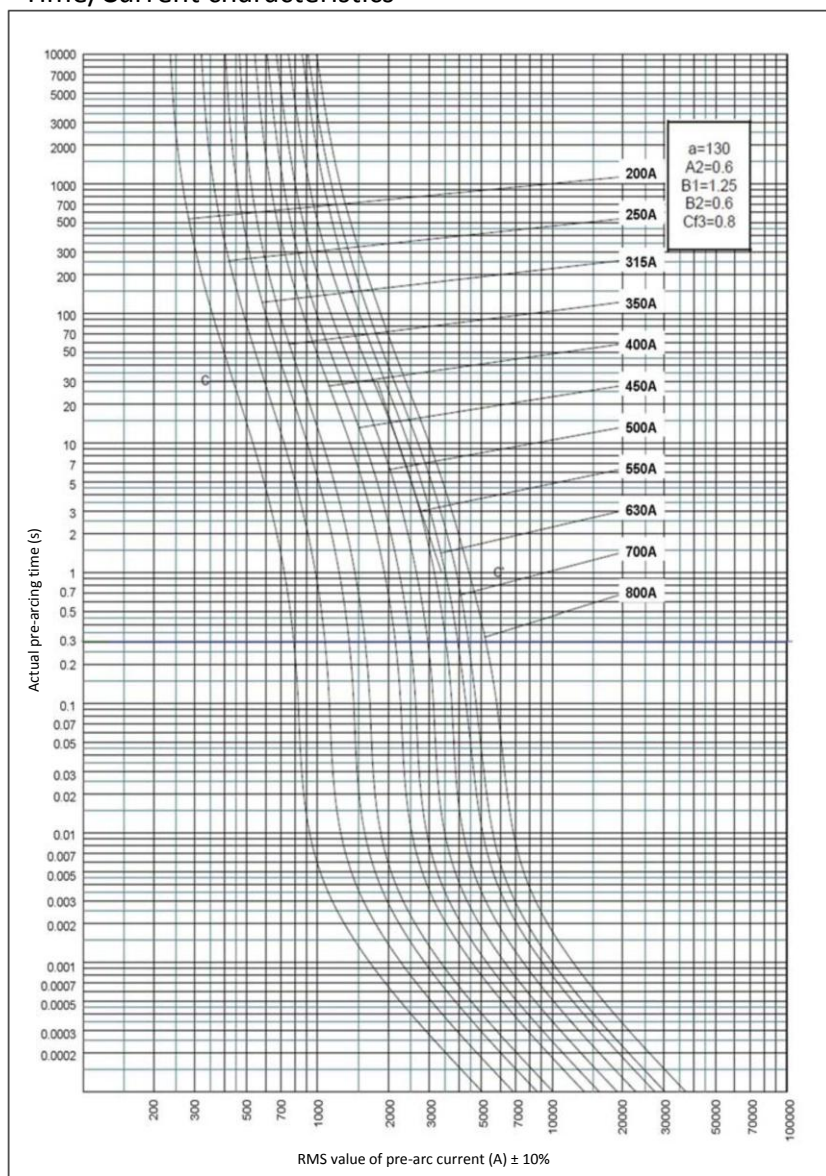





Peak arc voltage

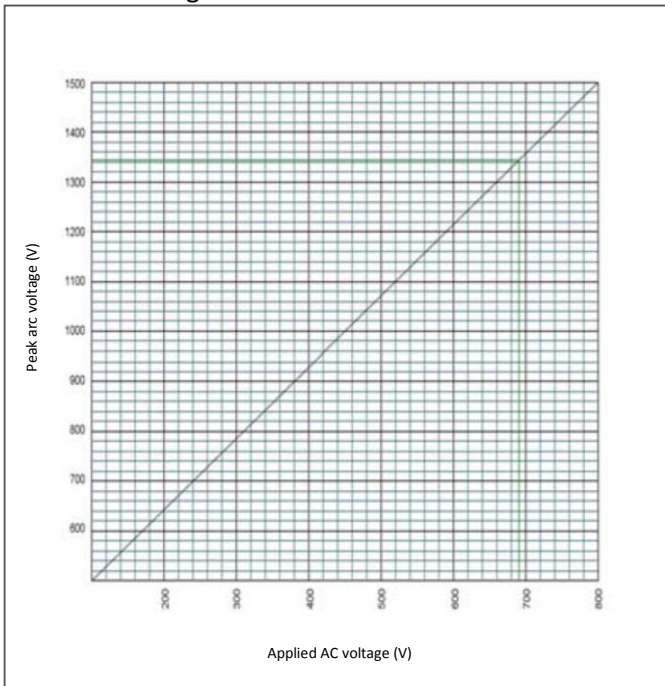


$I^2t$  multiplier coefficient

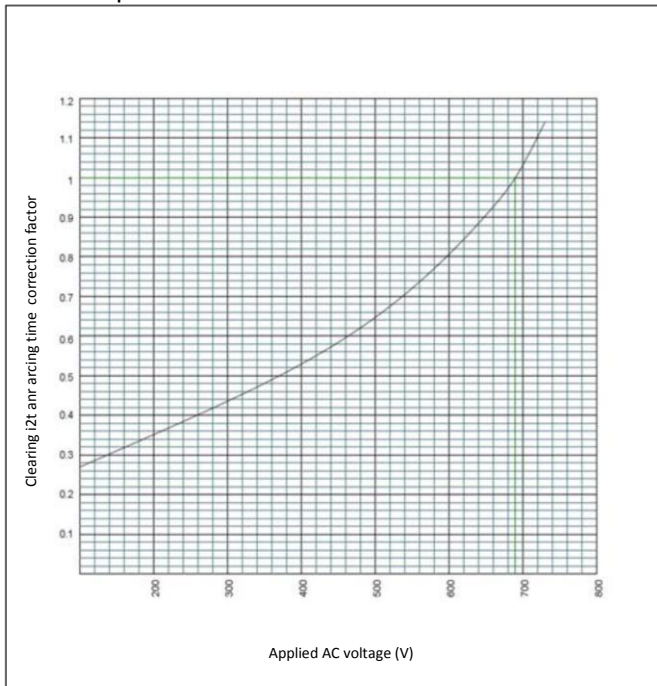

L/R time constant Vs. DC voltage capability

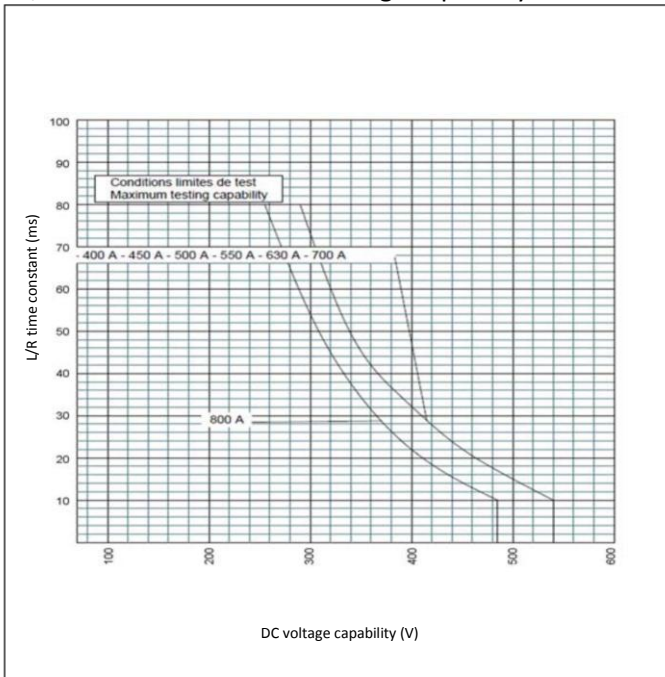

Peak let thru characteristics

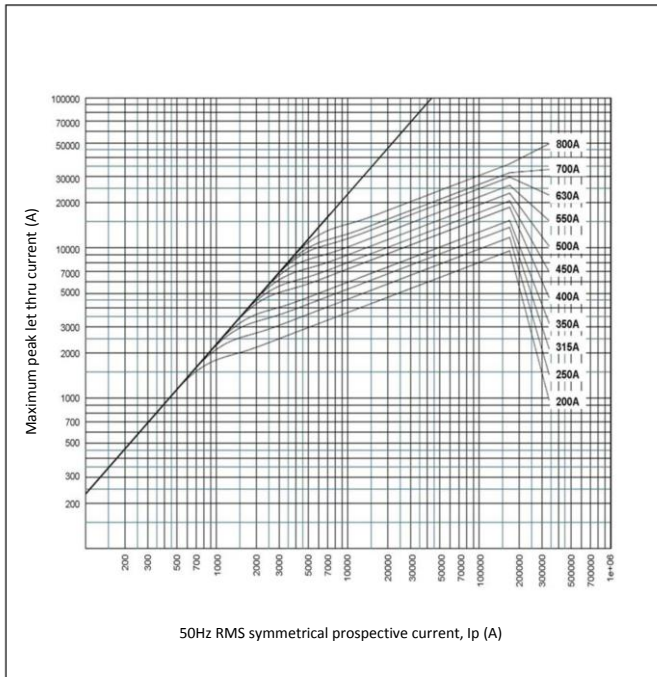

**Size 32 and 32-R fuses – Part numbers**

Weight – 540g Max. (600g max for 32-R reinforced terminals)

US2U fuses – US dimensions

Rated Voltage (UL/IEC) V	Nominal Current A	Class	Part Number
700/690	400	aR	070US2U0400B
700/690	450	aR	070US2U0450B
700/690	500	aR	070US2U0500B
700/690	550	aR	070US2U0550B
700/690	630	aR	065US2U0630B
700/690	700	aR	070US2U0700B
700/690	800	aR	070US2U0800B
700/690	900	aR	070US2U0900B†
700/690	1000	aR	070US2U1000B†
650/600	1100	aR	070US2U1100B†
600/550	1250	aR	060US2U1250B†
550/500	1400	aR	055US2U1400B†
550/500	1600	aR	055US2U1600B†
500/450	1800	aR	050US2U1800B†

UR2S fuses – UR dimensions

Rated Voltage (UL/IEC) V	Nominal Current A	Class	Part Number
700/690	315	aR	069UR2S0315B
700/690	350	aR	069UR2S0350B
700/690	400	aR	069UR2S0400B
700/690	450	aR	069UR2S0450B
700/690	500	aR	069UR2S0500B
700/690	550	aR	069UR2S0550B
700/690	630	aR	069UR2S0630B
700/690	700	aR	069UR2S0700B
700/690	800	aR	069UR2S0800B
700/690	900	aR	069UR2S0900B†
700/690	1000	aR	069UR2S1000B†
650/600	1100	aR	060UR2S1100B†
600/550	1250	aR	055UR2S1250B†
550/500	1400	aR	050UR2S1400B†*
550/500	1600	aR	050UR2S1600B†*
500/450	1800	aR	045UR2S1800B†*


\* - Non UL recognised rating

† - Size 32-R reinforced terminal


**Size 32 fuses – Rating and curves**

Rated Voltage (UL/IEC) V	Nominal Current A	Class	Pre-arcing I <sup>2</sup> t kA <sup>2</sup> s	Clearing I <sup>2</sup> t @ rated voltage kA <sup>2</sup> s	Watts loss @ 100% In W	Breaking capacity @ rated voltage kA
700/690	315	aR	5.2	28.9	71	200
700/690	350	aR	8.9	48.8	74	200
700/690	400	aR	15	80	75	200
700/690	450	aR	22	115	80	200
700/690	500	aR	28	145	90	200
700/690	550	aR	37	195	95	200
700/690	630	aR	54	280	105	200
700/690	700	aR	76	400	110	200
700/690	800	aR	115	600	120	200
700/690	900	aR	170	900	125	200
700/690	1000	aR	240	1250	135	200
650/600	1100	aR	270	1450	165	160
600/550	1250	aR	410	1950	180	150
550/500	1400	aR	555	2300	200	130
550/500	1600	aR	870	3600	205	130
500/450	1800	aR	1050	3700	230	110


Time/Current characteristics

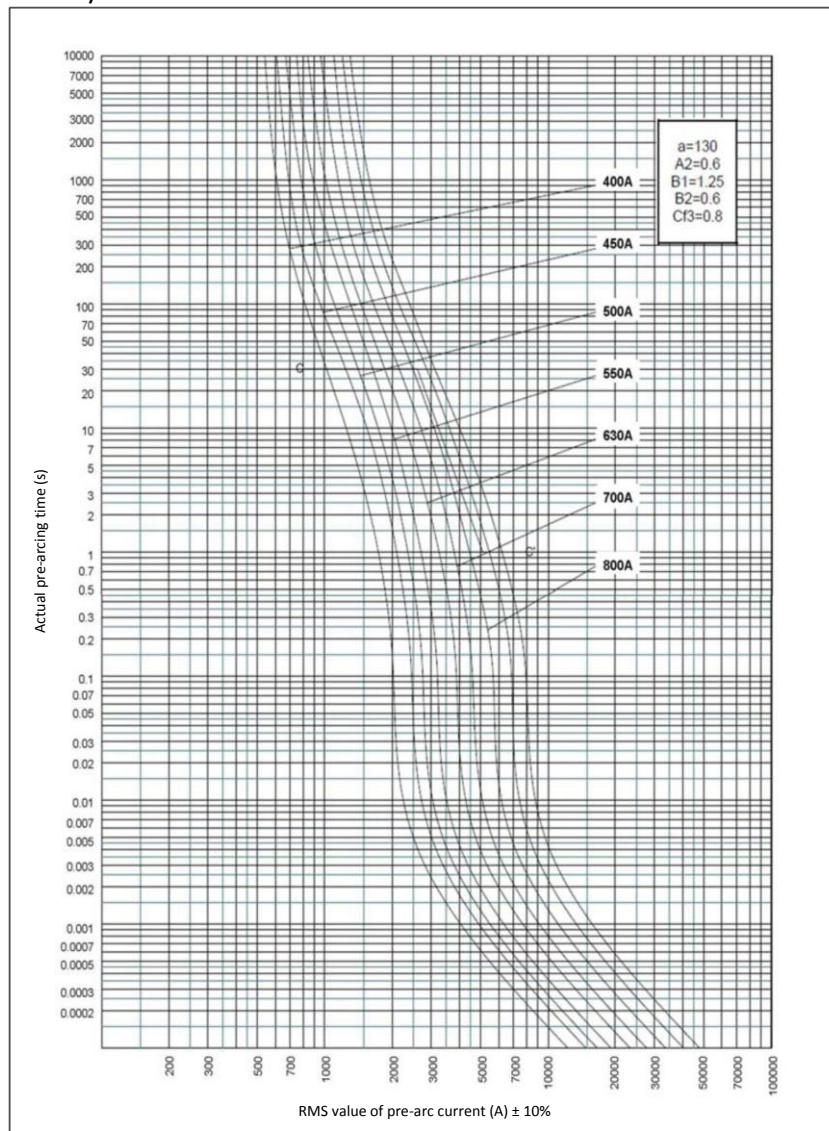


Peak arc voltage

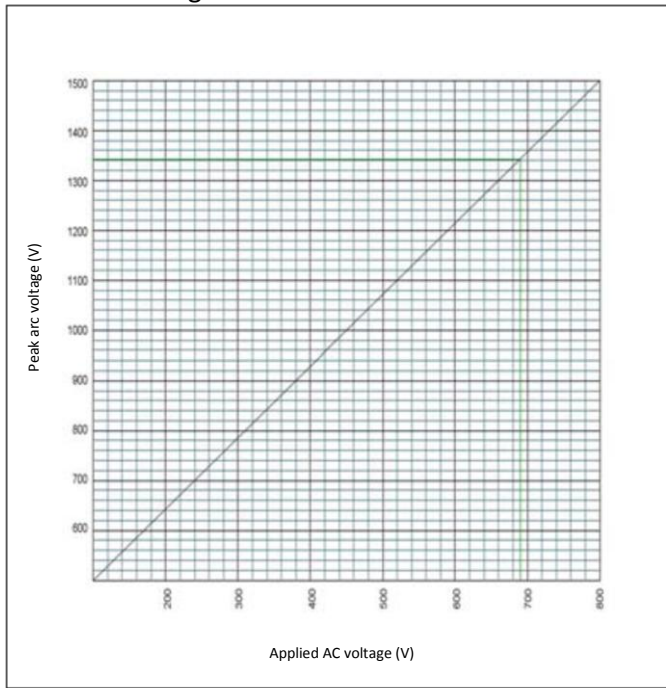


$I^2t$  multiplier coefficient

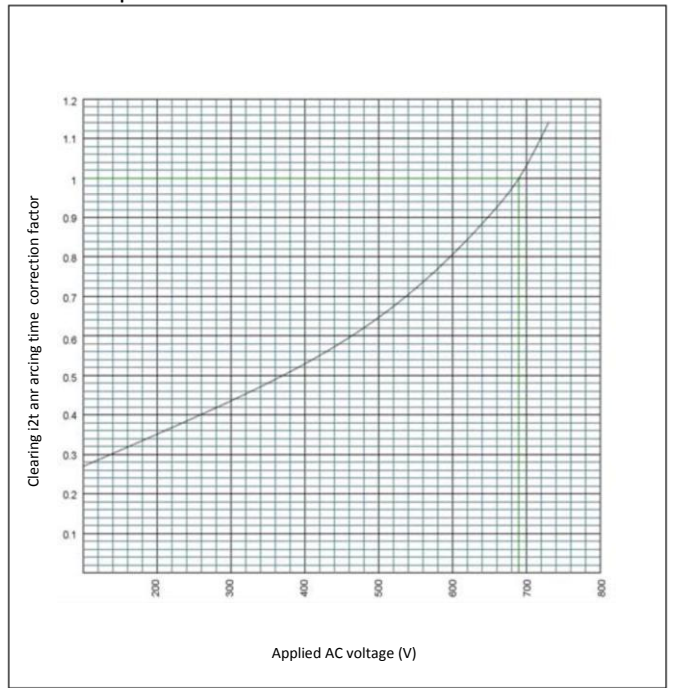

L/R time constant Vs. DC voltage capability

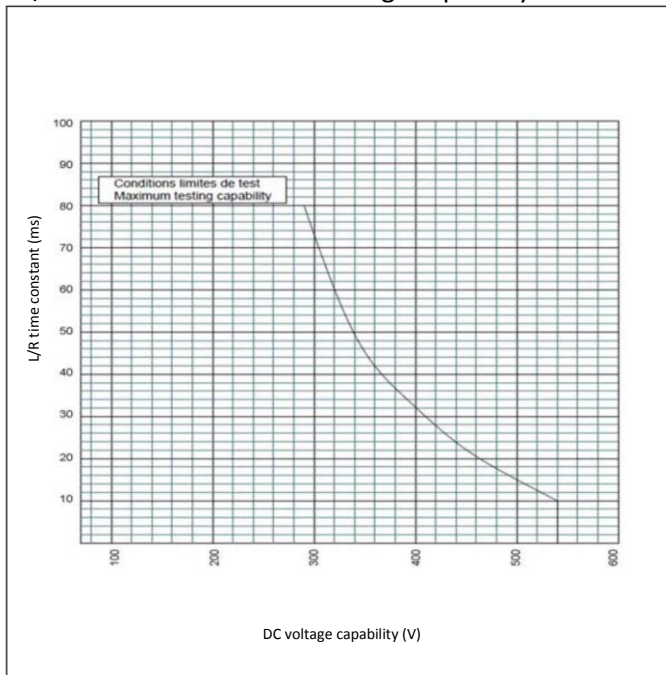

Peak let thru characteristics

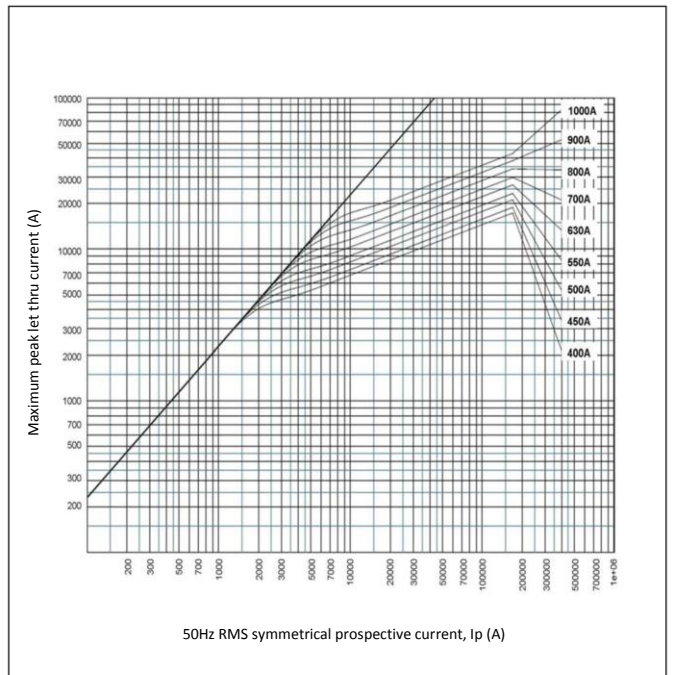

**Size 33 fuses – Part numbers**

Weight – 790g Max. (910g max. for 33-R reinforced terminals)

US3U fuses – US dimensions

Rated Voltage (UL/IEC) V	Nominal Current A	Class	Part Number
700/690	450	aR	070US3U0450B
700/690	500	aR	070US3U0500B
700/690	550	aR	070US3U0550B
700/690	630	aR	065US3U0630B
700/690	700	aR	070US3U0700B
700/690	800	aR	070US3U0800B
700/690	900	aR	070US3U0900B
700/690	1000	aR	070US3U1000B
700/690	1100	aR	070US3U1100B
700/690	1250	aR	070US3U1250B†
700/690	1400	aR	070US3U1400B†
650/600	1500	aR	065US3U1500B†
650/600	1600	aR	065US3U1600B†
600/600	1800	aR	065US3U1800B†
600/550	2000	aR	060US3U2000B†
550/500	2250	aR	055US3U2250B†
500/450	2500	aR	050US3U2500B†

UR3S fuses – UR dimensions

Rated Voltage (UL/IEC) V	Nominal Current A	Class	Part Number
700/690	450	aR	069UR3S0450B*
700/690	500	aR	069UR3S0500B
700/690	550	aR	069UR3S0550B
700/690	630	aR	069UR3S0630B
700/690	700	aR	069UR3S0700B
700/690	800	aR	069UR3S0800B
700/690	900	aR	069UR3S0900B
700/690	1000	aR	069UR3S1000B
700/690	1100	aR	069UR3S1100B
700/690	1250	aR	069UR3S1250B†
700/690	1400	aR	069UR3S1400B†
700/690	1500	aR	069UR3S1500B†
700/690	1600	aR	069UR3S1600B†
700/690	1800	aR	069UR3S1800B†
600/550	2000	aR	055UR3S2000B†
550/500	2250	aR	050UR3S2250B†
500/450	2500	aR	045UR3S2500B†


\* - Non UL recognised rating

† - Size 33-R reinforced terminal


**Size 33 fuses – Rating and curves**

Rated Voltage (UL/IEC) V	Nominal Current A	Class	Pre-arcing I <sup>2</sup> t kA <sup>2</sup> s	Clearing I <sup>2</sup> t @ rated voltage kA <sup>2</sup> s	Watts loss @ 100% In W	Breaking capacity @ rated voltage kA
700/690	450	aR	13.45	74.1	88	200
700/690	500	aR	19	100	105	200
700/690	550	aR	27	140	110	200
700/690	630	aR	40	210	120	200
700/690	700	aR	55	300	125	200
700/690	800	aR	95	490	130	200
700/690	900	aR	135	700	135	200
700/690	1000	aR	170	900	155	200
700/690	1100	aR	240	1260	160	200
700/690	1250	aR	350	1850	180	200
700/690	1400	aR	480	2500	200	200
700/690	1500	aR	500	2500	210	160
700/690	1600	aR	555	2900	240	160
700/690	1800	aR	720	3870	260	160
600/550	2000	aR	950	4500	290	150
550/500	2250	aR	1250	5160	320	130
500/450	2500	aR	1870	6540	330	110


Time/Current characteristics

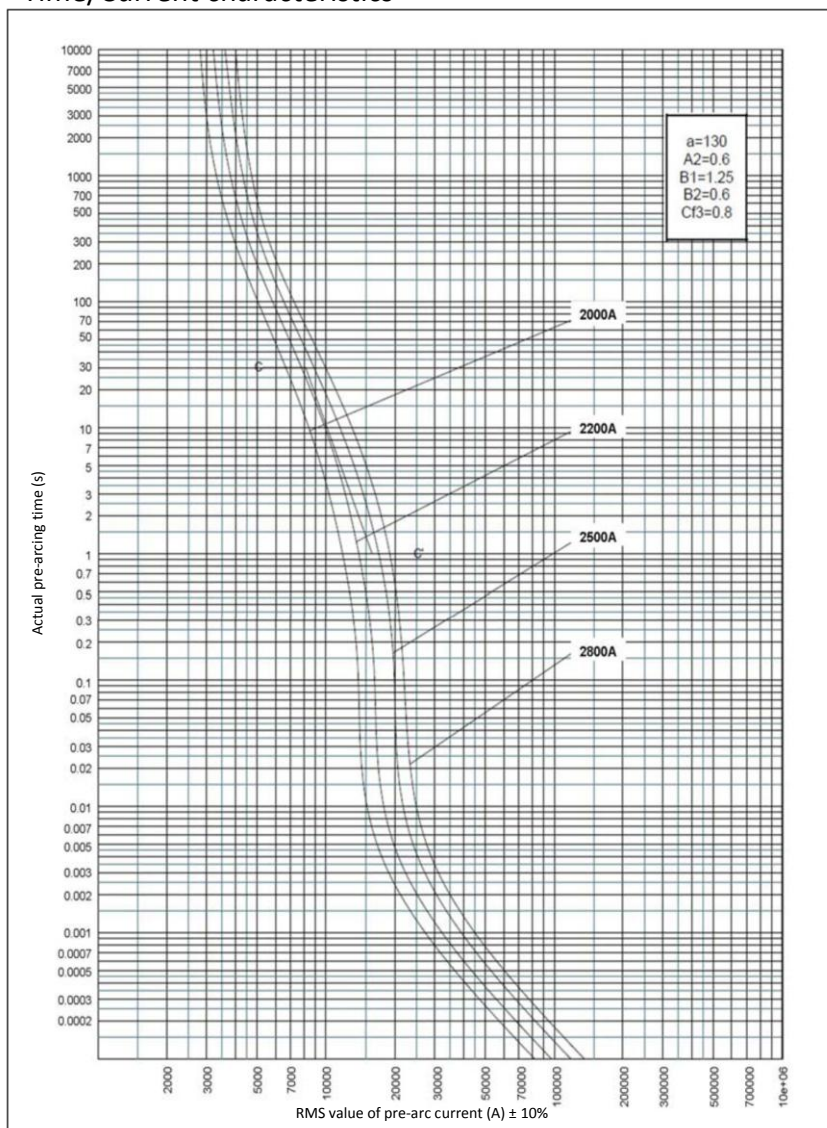


Peak arc voltage

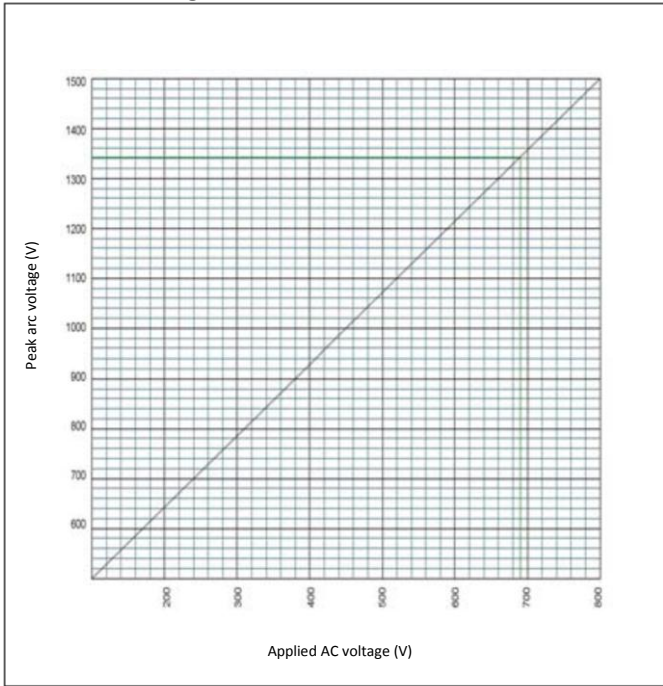


$I^2t$  multiplier coefficient

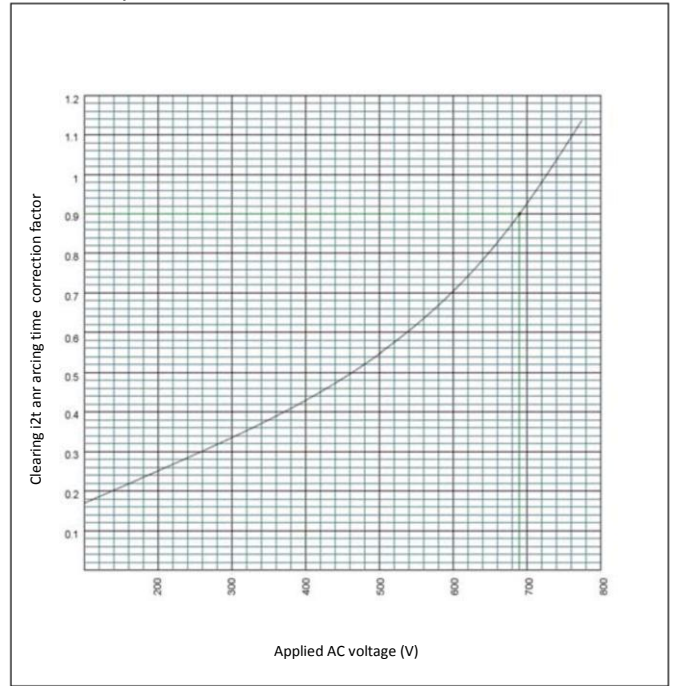

L/R time constant Vs. DC voltage capability

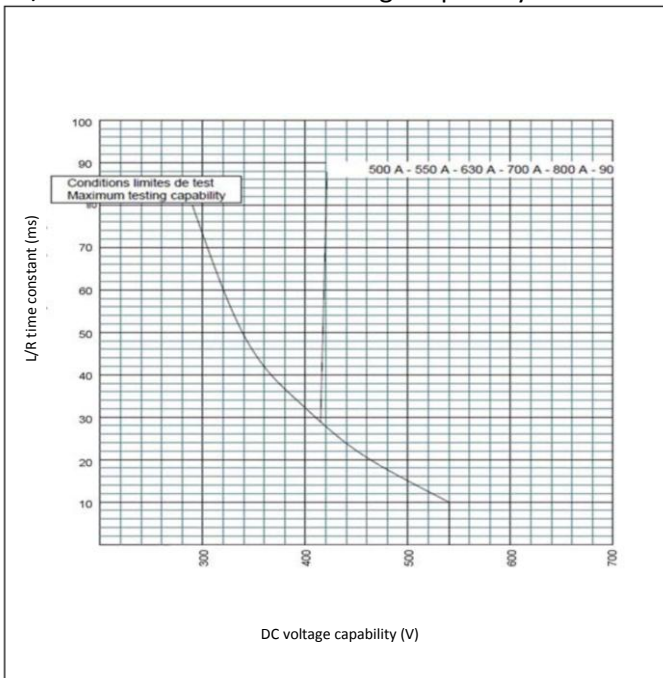


Peak let thru characteristics

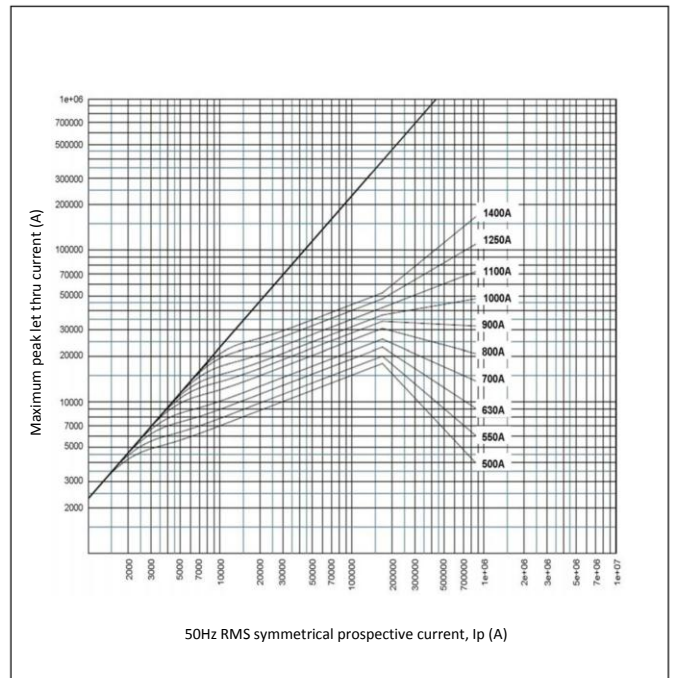

## Drawings and Dimensions


### USxU fuses

Size	A	B	C	D	d	E	G	P
US0U	40	46.5	82	26	5/16"-18	50.6	9	6
US1U	51	56.5	91	30	5/16"-18	50.6	9	9
US2U	60	65.5	100	38	3/8"-16	50.6	15	9
US2U (32-R) Reinforced terminals	60	65.5	100	42	3/8"-16	50.6	15	9
US3U	74.5	79.5	114	46	1/2"-13	50.6	15	9
US3U (33-R) Reinforced terminals	74.5	79.5	114	52	1/2"-13	50.6	15	9

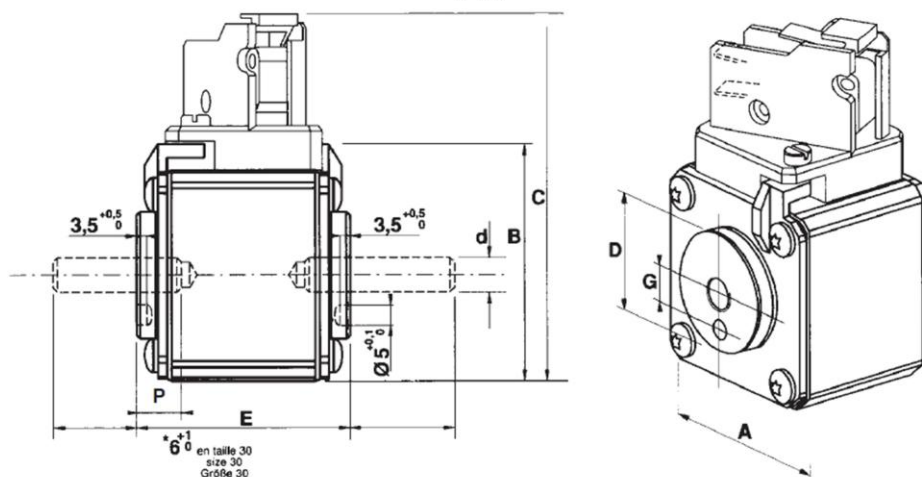

### URxS fuses

Size	A	B	C	D	d	G	M	N	P	E
UR0S	40	46.5	82	26	M8	9	22	27	6	50.6
UR1S	51	56.5	91	30	M8	9	19	24	9	50.6
UR2S	60	65.5	100	38	M10	15	19	39	9	50.6
UR2S(32-R) Reinforced terminals	60	65.5	100	42	M10	15	19	39	9	50.6
UR3S	74.5	79.5	114	46	M12	15	24	39	9	50.6
UR3S (33-R) Reinforced terminals	74.5	79.5	114	52	M12	15	24	39	9	50.6

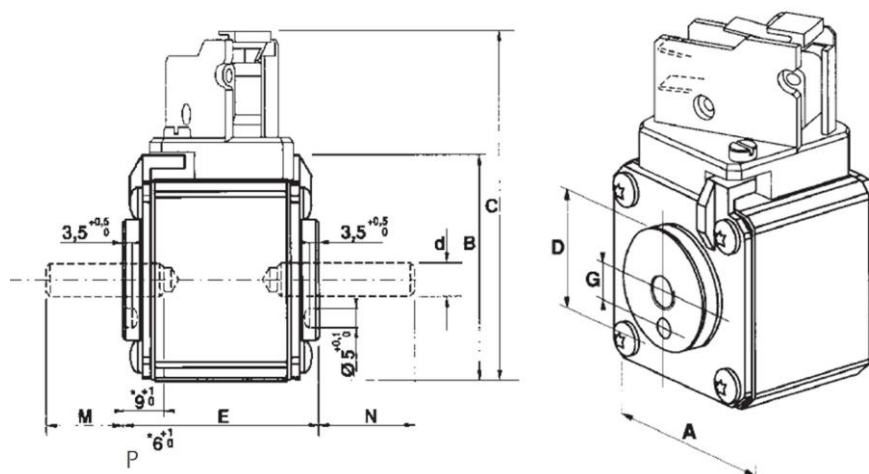


All dimensions in mm unless specified  
Microswitch supplied separately



## Microswitches

IXYS UK can offer a range of microswitches to suit our PSC square-bodied fuse ranges

System: MS 3V 1  
 Fuse sizes: 30, 31, 32, 33  
 Indication style: MS 3V 1-5 = Standard NO-NC  
 MS 3V 1-5 BS = Low Level NO-NC  
 MS 3V 1-5 ET = Low Level NO-NC IP 50 (9)  
 MS 3V 1-9 BS = Low Level NO-NC

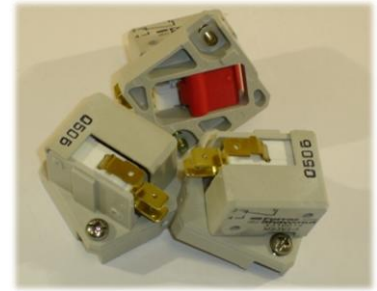


Part number	AC Insulation Voltage Rating *** (V)	Positive Operating Voltage/Current (V/mA)	Current Rating (A)	Interrupting Rating (A)						AC Voltage Withstand * (kV)	Impulse Voltage test Vimp 1.2/50µs ** (kV)	Fire Class according to UL 94	
				Current (A)	Non inductive circuit			Inductive Circuit: L/R = 25ms					
					30V	110V	250V	30V	110V				250V
MS 3V 1-5	1000	20/50	10	AC 50/60Hz	10	10	10	10	10	10	8.5	14	H.B.
				DC	8	0.4	0.2	4	0.2	0.1	12	20	
MS 3V 1-5 BS		10/10	3	AC 50/60Hz	3	3	3	2	1	1	8.5	14	
				DC	3	0.5	0.25	3	0.2	0.1	12	20	
MS 3V 1-5 ET		10/10	3	AC 50/60Hz	3	3	3	2	1	1	8.5	14	
				DC	3	0.5	-	2	0.2	-	12	20	
MS 3V 1-9 BS		10/10	3	AC 50/60Hz	3	3	3	2	1	1	8.5	14	
				DC	3	0.5	0.25	2	0.2	0.1	12	20	

## Fuse Holder

Part Number	Fuse size	Fuse Type	Insulation Voltage (V) AC, 50/60Hz & DC	Rated Current (A)	Dimensions								
					A	B	C	D	E	G	L	M	F
SI TT 30/31	30	Stud	1500	1000	118	170	83	42	4	50.6	202	M8	57
	31				123								
SI TT 32/33	32			137	93		60	6				M10	
	33			145	109		75						

All dimensions in mm

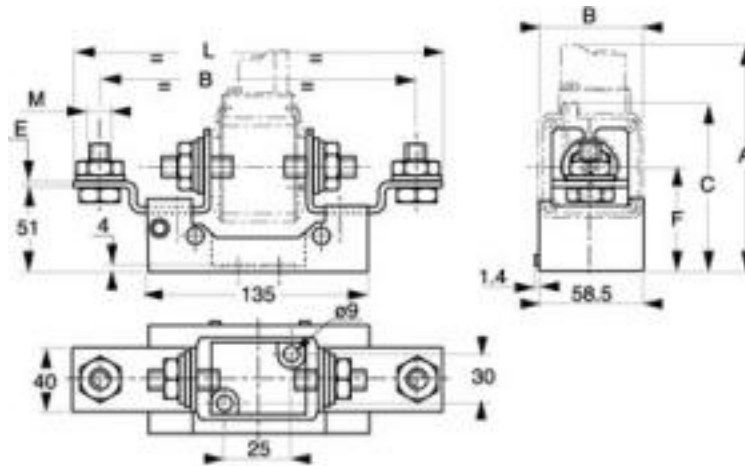

Certificate FM26085

IXYS UK Westcode Ltd's BS EN ISO9001 quality system is registered by BSI



Langley Park Way  
 Chippenham, SN15 1GE  
 United Kingdom  
 Tel: +44 (0)1249 444524  
 Fax: +44 (0)1249 659448  
 E-mail: sales@ixysuk.net



Edisonstr. 15  
 D-68623 Lambertheim  
 Germany  
 Tel: +49 (0) 6206 503-0  
 Fax: +44 (0) 6206 503627  
 E-mail: marcom@ixys.de

We are supported by a global network of local offices, representatives and distributors. Please visit our website for more information

# Thyristor/Diode Modules

October 2012 Issue 3

**IXYS UK's range of thyristor and diode modules, designed to industry standard outlines and with isolated bases is perfect for all your needs.**

Available in 6 standard configurations, all devices offer full pressure contact construction for maximum reliability and performance at rated current.

These products have a  $V_{RRM}/V_{DRM}$  between 1200V to 3600V and are available as dual thyristor, dual diode or thyristor/diode options. Single diode/single thyristor options are also available



Other configurations are available on request. Please consult the Chippenham factory for more information.

## Features and benefits

- $V_{RRM}/V_{DRM}$  up to 3600V
- Electrically isolated baseplate
- Industry standard package
- UL recognition
- Simplifies mechanical design
- Rapid assembly
- Full pressure contact construction

## 6 configurations of dual diode/thyristor available

### 2 configurations of single diode/thyristor available

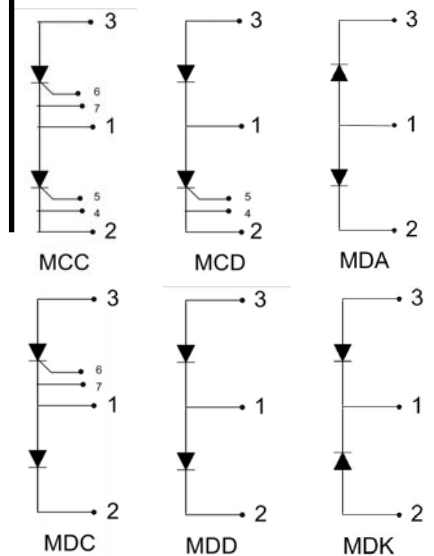


## Applications



- Soft starts
- Industrial drives
- Wind power converters
- Welding
- Front end rectifiers





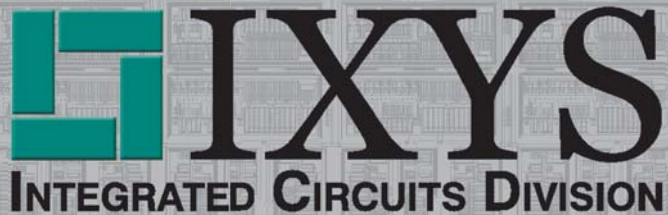

# ***Semiconductor***

## ***Product Catalog***

# IXYS Integrated Circuits Division

**In April, 2012, Clare, Inc., officially became IXYS Integrated Circuits Division.**

IXYS Integrated Circuits Division is a wholly owned subsidiary of IXYS Corporation. Conveniently located close to Boston, Massachusetts, USA, IXYS Integrated Circuits Division designs, manufactures, and markets a wide variety of semiconductor devices, and is a major provider of optically isolated electronic products.



Clare, Inc., founded by Carl P. Clare in 1937 as C. P. Clare & Company, designed and manufactured electromechanical relays (EMR) for the rapidly growing power and telephony markets of the time. C. P. Clare & Company products found their way into aviation and communications products from the very beginning of World War II to the end. Continuously operating under various names from 1937 until the present, C. P. Clare & Company, as Clare, Inc., was purchased by IXYS Corporation in 2002, and is now known as IXYS Integrated Circuits Division.

IXYS Integrated Circuits Division's unique mix of high voltage wafer fab, isolation barrier expertise, multi-chip packaging experience, and expertise in analog, power and mixed signal design points the way to more functionality in a smaller footprint at lower cost for your designs.

- **Solid State Relays:** one of the industry's broadest lines of optically isolated SSRs, available in a wide selection of blocking voltages and load currents.
- **High Voltage ICs:** high voltage 8-channel and 16-channel Analog Switches for the medical and imaging markets, high voltage LED Drivers, high voltage IGBT and MOSFET Drivers, and high voltage Line Card Access Switch (LCAS) products for Central Office (CO) telephony.
- **Power market:** IGBT and MOSFET Gate Drivers, Power Solid State Relays (SSR), SCR-based AC Power Switches, and Field Effect Transistors (FET).
- **Illumination:** high voltage, grid-powered, high-brightness LED Drivers.
- **Telephony:** a broad range of products that includes Line Card Access Switch (LCAS) products, LITELINK® Silicon Data Access Arrangement (DAA), phone-line interface and monitoring devices, DC Termination devices for xDSL and ISDN applications, Cybergate™ DAA, and others.
- **Portable reader devices:** display drivers for today's popular electronic-paper readers.

## Hi-Reliability Program

Building on 20 years of experience supplying Hi-Rel parts to the aerospace industry, IXYS Integrated Circuits Division now offers a line of high-reliability Solid State Relays and Optocouplers that feature full product traceability, extremely low PPM failure rates, guaranteed operation from -40°C to +85°C (and up to 105°C upon request), 100% burn-in (HTRB) 48 hours minimum, 100% post burn-in electrical tests at room temperature and at 85°C, thermal cycle (by sample or 100% for 20 cycles).

Any IXYS Integrated Circuits Division Solid State Relay (SSR) or Optocoupler offered in this catalog can be provided as a Hi-Rel device based on extensive additional environmental stressing and screening performed on standard commercial parts. Please see [www.ixysic.com/Products/HiRelProgram.htm](http://www.ixysic.com/Products/HiRelProgram.htm) for full details.

## Custom High Voltage Semiconductor Design Services

IXYS Integrated Circuits Division offers design services to the industry for the custom development of high voltage semiconductor devices. The company's wafer fabrication facility features a 600V BCDMOS process on a bonded-wafer, silicon-on-insulator, trench-isolated technology for IC development. Monolithic silicon with high voltage vertical DMOSFETs along with CMOS logic and bipolar transistors from IXYS Integrated Circuits Division address many applications requiring a high voltage interface. In addition, the company's techniques for optical isolation for relays and signal processing offer high voltage isolation between the load side and the system controller.

# Contents

## Part Number Index

Numerical Index to all Product Catalog Devices .....	4
--	---

## Solid State Relays (SSR) / Semiconductor Relays

1-Form-A Relays.....	7
1-Form-A Relays: Dual Independent .....	9
1-Form-B Relays.....	10
1-Form-B Relays: Dual Independent .....	10
1-Form-A & 1-Form-B Combination Relay.....	11
1-Form-A Relays: DC-Only .....	11
1-Form-A Relays: Voltage-Controlled .....	12
1-Form-B Relays: Voltage-Controlled .....	12
2-Form-A Relays: Common Input .....	12
1-Form-C Relays .....	12
Multifunction SSR Products.....	13

## Integrated Protection OptoMOS Solid State Relay Series

Current Limited SSRs with Thermal Management .....	14
Current Limited SSR with Thermal Management & OVP .....	15

## Power Relays

1-Form-A Power Relays: Bidirectional .....	17
1-Form-A Power Relays: Unidirectional .....	17

## Optically Isolated AC Power Switches

Optically Isolated AC Power Switches: $I_{LOAD} \leq 1A$ .....	18
Optically Isolated AC Power Switches: $I_{LOAD} > 1A$ .....	19

## Gate Drivers

IXD_600 Series Low Side Gate Drivers .....	20
High Side Gate Drivers.....	21
Full Bridge Gate Drivers .....	21
Optically Isolated Gate Drivers .....	22
2.5A Output Optically Coupled Gate Driver.....	22

## High Voltage Products

High Voltage Analog Switches.....	24
Quad High Voltage Isolated Analog Switch Array.....	34

## Discrete Components

N-Channel Depletion Mode FETs.....	25
Diode Bridges.....	25

## High Speed Digital Opto Isolators

CPC5902 Optically Isolated I <sup>2</sup> C Bus Repeater.....	26
CPC5903 Optically Isolated I <sup>2</sup> C Bus Repeater.....	27
CPC5002 Dual High Speed Digital Optical Isolator.....	27

## Optocouplers

Single & Dual Optocouplers .....	28
Linear Optocouplers .....	29
Optically Isolated Error Amplifiers .....	29

## Display Products

High Voltage LED Drivers .....	30
ePaper Source & Gate Drivers .....	30

## Telecom Products

LCAS: Line Card Access Switches.....	32
Dual LCAS.....	33
LCAS for Ringing SLIC.....	34
Quad High Voltage Isolated Analog Switch Array.....	34
LITELINK™ Silicon DAA.....	35
Voltage Monitor Devices.....	36
DC Termination ICs (xDSL, ISDN).....	37
Telecom Multifunction Products.....	38
Call Progress Tone Detectors & Generators.....	39
Line Sense Relay.....	39
MF Trunk Signaling Devices .....	40
Embedded Modem Module .....	40
Cybergate™ DAA Module .....	41

## Other Semiconductor Products

Load Drivers .....	23
Low Power Transistor Array .....	41
Hall-Effect Switches.....	42
Solar Cells .....	42

## Application Notes

Application Notes.....	43
------------------------	----

## Part Number Index

CPC1001N	28	CPC1335	7	CPC1943	18	CPC3720	25	CYG2100	41	IXDI630M	20	LBB127	10
CPC1002N	11	CPC1390	7	CPC1945G	18	CPC3730	25	CYG2110	41	IXDN602	20	LCA100	7
CPC1004N	11	CPC1393	7	CPC1945Y	18	CPC40055	19	CYG2111	41	IXDN604	20	LCA100L	7
CPC1006N	7	CPC1394	7	CPC1961	18	CPC44055	19	CYG2217	41	IXDN609	20	LCA110	7
CPC1008N	7	CPC1465	37	CPC1963	18	CPC5002	27	CYG2218	41	IXDN614	20	LCA110L	7
CPC1009N	7	CPC1466	37	CPC1965G	18	CPC5601	35	CYG2320	41	IXDN630	20	LCA120	7
CPC1014N	7	CPC1510	7, 14	CPC1965Y	18	CPC5602	25	FDA215	23	IXDN630M	20	LCA120L	7
CPC1016N	7	CPC1540	7, 14	CPC1966	19	CPC5603	25	FDA217	23	LAA100	9	LCA125	7
CPC1017N	7	CPC1560	7, 14	CPC1966B	19	CPC5608	35, 41	IAA110	13	LAA100L	9	LCA125L	7
CPC1018N	7	CPC1563	7, 14	CPC1967J	17	CPC5620	35	IAA170	13	LAA108	9	LCA126	7
CPC1019N	7	CPC1580	22	CPC1972	18	CPC5621	35	IAB110	13	LAA110	9	LCA127	7
CPC1020N	7	CPC1590	22	CPC1973Y	17	CPC5622	35	IAD110	13	LAA110L	9	LCA127L	7
CPC1025N	7	CPC1593	7, 15	CPC1976	19	CPC5710	36	IAD170	13	LAA120	9	LCA129	8
CPC1030N	7	CPC1706Y	17	CPC1977J	17	CPC5712	36	IBB110	13	LAA120L	9	LCA182	8
CPC1035N	7	CPC1708J	17	CPC1978J	17	CPC5902	26	ITC100	38	LAA125	9	LCA210	12
CPC1106N	10	CPC1709J	17	CPC1979J	17	CPC5903	27	ITC107	38	LAA125L	9	LCA210L	12
CPC1117N	10	CPC1718J	17	CPC1981Y	17	CPC7220	24	ITC117	38	LAA126	9	LCA211	12
CPC1125N	10	CPC1726Y	17	CPC1983Y	17	CPC7232	24	ITC117L	38	LAA126L	9	LCA220	12
CPC1130N	10	CPC1727J	17	CPC1986J	17	CPC7508	34	ITC135	38	LAA127	9	LCA701	8
CPC1135N	10	CPC1777J	17	CPC1988J	17	CPC7514	8, 34	ITC137	38	LAA127L	9	LCA710	8
CPC1150N	10	CPC1779J	17	CPC1998J	19	CPC75282	33	IX2127	21	LAA710	9	LCA712	8
CPC1215	12	CPC1786J	17	CPC2014N	9	CPC7556	25	IX3120	22	LBA110	11	LCA715	8
CPC1217	12	CPC1788J	17	CPC2017N	9	CPC7557	25	IXDD604	20	LBA110L	11	LCA717	8
CPC1218	12	CPC1822	42	CPC2025N	9	CPC7591	33	IXDD609	20	LBA120	11	LCB110	10
CPC1219	12	CPC1824	42	CPC2030N	9	CPC7592	33	IXDD614	20	LBA120L	11	LCB111	10
CPC1225N	7	CPC1831	42	CPC2125N	10	CPC7594	33	IXDD630	20	LBA126	11	LCB120	10
CPC1230N	7	CPC1832	42	CPC2317N	11	CPC7601	24	IXDD630M	20	LBA126L	11	LCB126	10
CPC1231N	10	CPC1906Y	17	CPC2330N	11	CPC7691	33	IXDF602	20	LBA127	11	LCB127	10
CPC1301	28	CPC1908J	17	CPC2400E	40	CPC7695	33	IXDF604	20	LBA127L	11	LCB710	10
CPC1302	28	CPC1909J	17	CPC3701	25	CPC7701	24	IXDI602	20	LBA710	11	LCB716	10
CPC1303	28	CPC1916Y	17	CPC3703	25	CPC9909	30	IXDI604	20	LBA716	11	LCC110	12
CPC1317	7	CPC1918J	17	CPC3708	25	CYG2000	41	IXDI609	20	LBB110	10	LCC120	12
CPC1330	7	CPC1926Y	17	CPC3710	25	CYG2011	41	IXDI614	20	LBB120	10	LDA100	28
CPC1333	10	CPC1927J	17	CPC3714	25	CYG2020	41	IXDI630	20	LBB126	10	LDA101	28

## Part Number Index

LDA102	28	MXHV9910	30	PLA194	8
LDA110	28	OAA160	9	PLB150	10
LDA111	28	OMA160	8	PLB190	10
LDA200	28	PAA110	9	PM1204	18
LDA201	28	PAA110L	9	PM1205	18
LDA202	28	PAA127	9	PM1206	18
LDA203	28	PAA132	9	PS1201	18
LDA210	28	PAA140	9	PS2401	18
LDA211	28	PAA140L	9	PS2601	18
LDA212	28	PAA150	9	TS117	13
LDA213	28	PAA190	9	TS117L	13
LIA120	29	PAA191	9	TS118	13
LIA130	29	PAA193	9	TS120	13
LOC110	29	PBA150	11	TS120L	13
LOC111	29	PBB150	10	TS122	13
LOC112	29	PBB190	10	TS190	13
LOC117	29	PD1201	18	TS190L	13
LOC210	29	PD2401	18	XAA117	9
LOC211	29	PD2601	18	XAA170	9
M-949-11	39	PLA110	8	XBA170	11
M-980-02	39	PLA110L	8	XBB170	10
M-986-2R2	40	PLA132	8	XCA170	8
M-987-2A1K	40	PLA134	8	XCB170	10
M-987-2R2K	40	PLA140	8	XS170	13
M-991	39	PLA140L	8		
MX6895	21	PLA143	8		
MX860	31	PLA150	8		
MX877	23	PLA160	8		
MX879	23	PLA170	8		
MX887D	42	PLA171	8		
MX887P	42	PLA190	8		
MXEI1480	31	PLA191	8		
MXEI2240	31	PLA192	8		
MXEI2300	30	PLA193	8		



# Solid State Relays

The OptoMOS® line of Solid State Relays (SSR) uses discrete semiconductor components and patented OptoMOS architecture to provide fast, reliable, bounce-free switching in a compact design. From one of the world's smallest single pole, high voltage, 4-pin relays to multi-pole and multifunction devices, OptoMOS products are an ideal replacement for larger reed and electromechanical relays. Compared to older electromagnetic technologies, OptoMOS relays offer significantly lower drive current, smaller package size, no susceptibility to magnetic interference, and solid state reliability. All of these are key requirements for the design of today's complex low-power, multichannel products.

Solid State Relays are provided in three main types: Unidirectional (UNI), Bidirectional (BI), and Bidirectional Plus (BI+). A UNI relay conducts load current in only one direction, a BI relay conducts load current in both directions, and a BI+ relay has a provision for connecting the output MOSFETs in such a way that the relay in UNI configuration conducts significantly more load current than when it is wired in BI configuration (see the diagram on this page). The accompanying tables reference these three types for all devices listed.

These three main types are available in a variety of configurations: normally open (1-Form-A), normally closed (1-Form-B), dual 1-Form-A, dual 1-Form-B, 1-Form-A and 1-Form-B in the same package, 1-Form-A and 1-Form-B voltage-controlled relays, 2-Form-A, and 1-Form-C.



Drawings of all the available packages are shown below. For exact physical dimensions of any package, download the data sheet for the product that you are interested in from the web site page, a link to which is referenced in the note at the bottom of the page. The packages are referred to by number in the accompanying tables.

### Features:

- Low Drive Current
- High Reliability
- No EMI/RFI Generation
- Arc-Free with No Snubbing Circuits
- AC or DC Switching
- Current Limiting (Available)
- FCC Compatible
- Low Off-State Leakage


### Applications:

- Telecommunications / Datacommunications
- Instrumentation
- Multiplexers
- Data Acquisition / Electronic Switching
- I/O Subsystems
- Meters (Watt-Hour, Water, Gas)
- Medical Equipment (Patient / Equipment Isolation)
- Security
- Aerospace
- Industrial Controls

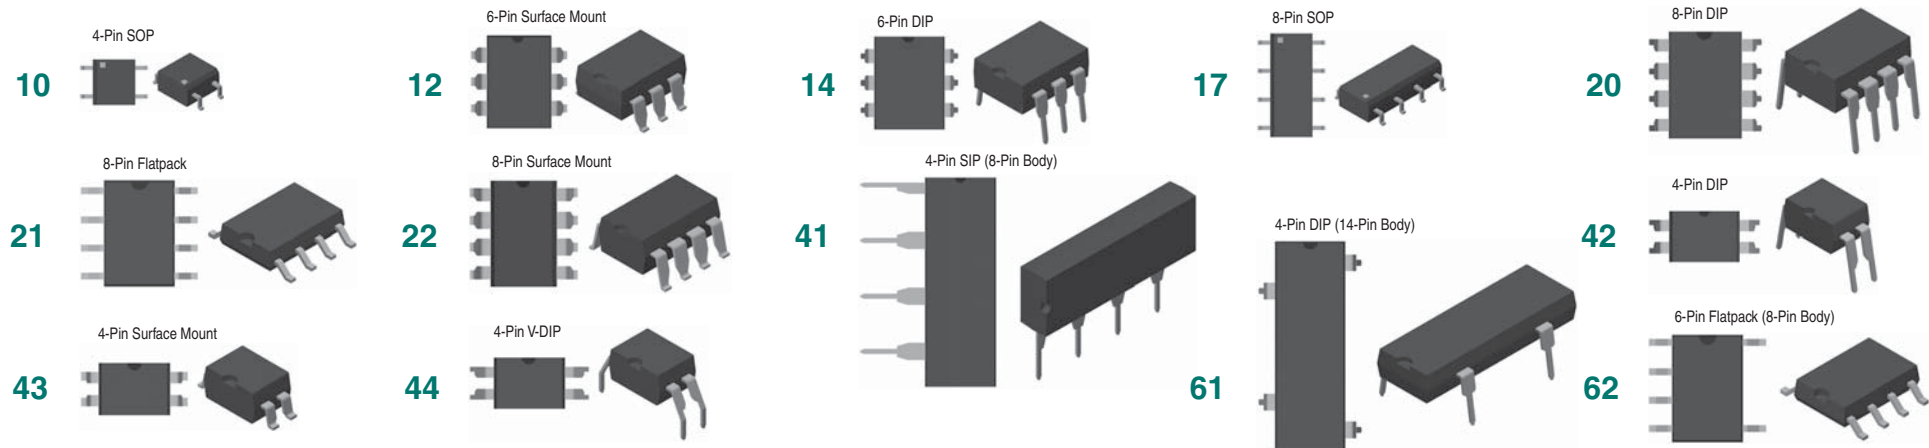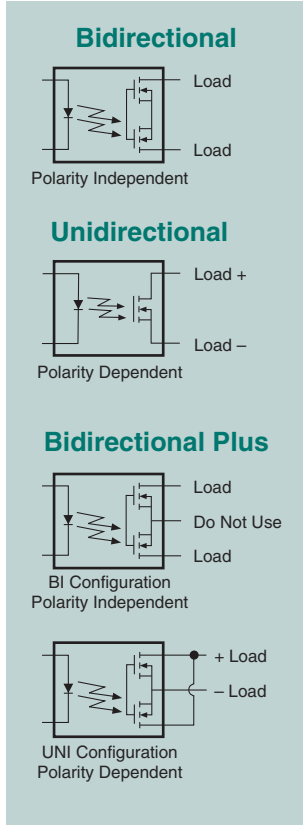

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)


# 1-Form-A Relays: Single-Pole, Normally Open

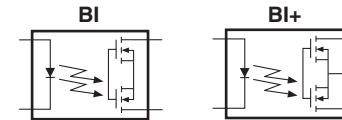

Part Number	Relay Type	Blocking Voltage	Load Current	On Resistance	Input Control Current	Switching Speeds	Isolation Voltage	Off-State Leakage	Package Type	Features and Comments
		(V <sub>p</sub> )	(mA)	(Ω)	(mA)	t <sub>on</sub> / t <sub>off</sub> (ms)	(V <sub>rms</sub> )	(μA)		
CPC1006N	BI	60	75	10	0.5	10 / 10	1500	1	10	Low I <sub>F</sub> , EN50130-4
CPC1008N	BI	100	150	8	2	2 / 0.5	1500	1	10	
CPC1009N	BI	100	150	8	2	2 / 0.5	1500	0.02	10	Very Low Off-State I <sub>LEAK</sub> = 20nA
CPC1014N	BI	60	400	2	2	2 / 1	1500	1	10	EN50130-4
CPC1016N	BI	100	100	16	2	2 / 0.5	1500	1	10	
CPC1017N	BI	60	100	16	1	10 / 10	1500	1	10	Low I <sub>F</sub> , EN50130-4
CPC1018N	BI	60	600	0.8	1	3 / 2	1500	1	10	Low I <sub>F</sub> , EN50130-4
CPC1019N	BI	60	750	0.6	2	3 / 3	1500	1	10	
CPC1020N	BI	30	1200	0.25	2	3 / 3	1500	1	10	High Load Current, Very Low On-Resistance
CPC1025N	BI	400	120	30	2	2 / 1	1500	1	10	
CPC1030N	BI	350	120	30	2	2 / 1	1500	1	10	
CPC1035N	BI	350	100	35	2	2 / 1	1500	1	10	
CPC1225N	BI	400	120	30	2	2 / 1	1500	1	10	EN/IEC60950-1 Supplementary Isolation Voltage (0.4mm Distance Through Isolation)
CPC1230N	BI	350	120	30	2	2 / 1	1500	1	10	EN/IEC60950-1 Supplementary Isolation Voltage (0.4mm Distance Through Isolation)
CPC1317	BI	70	150	16	1	2.5 / 2.5	3750	1	21	EN50130-4 (Installation Class 3), Transient Voltage Suppression (TVS)
CPC1330	BI	350	120	30	2	2 / 1	5000	1	42, 43	Enhanced Isolation Voltage
CPC1335	BI	350	100	35	1	10 / 10	3750	1	21	Low I <sub>F</sub> , EN50130-4 (Installation Class 3), Transient Voltage Suppression (TVS)
CPC1390	BI	400	140	22	2	1 / 1	5000	1	42, 43, 44	Enhanced Isolation Voltage
CPC1393	BI	600	90	50	2	5 / 5	5000	1	42, 43, 44	Enhanced Isolation Voltage
CPC1394	BI	600	120	35	2	5 / 3	5000	1	42, 43, 44	Enhanced Isolation Voltage
CPC1510	BI+	250	200	15	2	2 / 2	3750	1	12, 14	Current Limited with Thermal Shutdown - See Also Page 14
CPC1540	BI+	350	120	25	2	2 / 2	3750	1	12, 14	Current Limited with Thermal Shutdown - See Also Page 14
CPC1560	BI+	60	300	5.6	1.1	0.1 / 0.4	3750	1	20, 22	Current Limited with Thermal Shutdown - See Also Page 14
CPC1563	BI+	600	120	35	2	2 / 2	3750	1	12, 14	Current Limited with Thermal Shutdown - See Also Page 14
CPC1593	BI+	600	120	35	2	2 / 2	3750	1	12, 14	Current Limited, Thermal Shutdown, Over-Voltage Protection - See Also Page 15
LCA100	BI+	350	120	25	5	5 / 5	3750	1	12, 14	
LCA100L	BI+	350	120	25	5	5 / 5	3750	1	12, 14	Current Limiting
LCA110	BI+	350	120	35	2	3 / 3	3750	1	12, 14	
LCA110L	BI+	350	120	35	2	3 / 3	3750	1	12, 14	Current Limiting
LCA120	BI+	250	170	20	5	3 / 3	3750	1	12, 14	
LCA120L	BI+	250	150	20	5	3 / 3	3750	1	12, 14	Current Limiting
LCA125	BI+	300	170	16	5	5 / 5	3750	1	12, 14	
LCA125L	BI+	300	170	20	5	5 / 5	3750	1	12, 14	Current Limiting
LCA126	BI+	250	170	15	5	5 / 5	3750	1	12, 14	
LCA127	BI+	250	200	10	5	5 / 5	3750	1	12, 14	
LCA127L	BI+	250	170	15	5	5 / 5	3750	1	12, 14	Current Limiting

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)


## 1-Form-A Relays: Single-Pole, Normally Open (Continued)

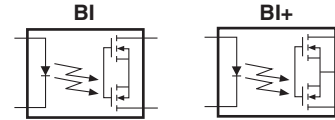


Part Number	Relay Type	Blocking Voltage	Load Current	On Resistance	Input Control Current	Switching Speeds	Isolation Voltage	Off-State Leakage	Package Type	Features and Comments
		(V <sub>p</sub> )	(mA)	(Ω)	(mA)	t <sub>on</sub> / t <sub>off</sub> (ms)	(V <sub>rms</sub> )	(μA)		
LCA129	BI+	250	170	20	2	8 / 8	3750	1	12, 14	
LCA182	BI+	350	120	35	0.25	3 / 3	3750	1	12, 14	Very Low I <sub>F</sub>
LCA701	BI+	100	1500	0.3	2	4 / 1	3750	1	12, 14	High Load Current
LCA710	BI+	60	1000	0.5	10	2.5 / 0.25	3750	1	12, 14	High Load Current
LCA712	BI+	60	1000	0.5	10	2.5 / 0.35	3750	0.01	12, 14	High Load Current, Low I <sub>LEAK</sub>
LCA715	BI+	60	2200	0.15	5	2.5 / 0.25	3750	1	12, 14	High Load Current
LCA717	BI+	30	2000	0.15	2	3 / 3	3750	1	12, 14	High Load Current
OMA160	BI+	250	50	100	10	0.125 / 0.125	3750	0.025	12, 14	Low I <sub>LEAK</sub> , Fast Switching Times
PLA110	BI+	400	150	22	5	1 / 0.5	3750	1	12, 14	
PLA110L	BI+	400	150	25	5	1 / 0.25	3750	1	12, 14	Current Limiting
PLA132	BI+	60	600	1	2	5 / 2	3750	1	12, 14	
PLA134	BI+	100	350	3	5	5 / 5	3750	1	12, 14	
PLA140	BI+	400	250	8	5	3 / 1	3750	1	12, 14	
PLA140L	BI+	400	200	13	5	5 / 3	3750	1	12, 14	Current Limiting
PLA143	BI+	600	100	50	2	5 / 5	4000	1	12, 14	Enhanced Isolation Voltage
PLA150	BI+	250	250	7	5	2.5 / 0.5	3750	1	12, 14	
PLA160	BI+	300	50	100	10	0.05 / 0.05	3750	0.025	12, 14	Low I <sub>LEAK</sub> , Fast Switching Times
PLA170	BI+	800	100	50	5	5 / 5	3750	1	12, 14	
PLA171	BI	800	100	50	2	5 / 5	5000	1	62	Enhanced Isolation Voltage (7mm Output Pin Separation)
PLA190	BI+	400	150	22	5	1 / 0.5	5000	1	12, 14	Enhanced Isolation Voltage
PLA191	BI+	400	250	8	5	3 / 1	5000	1	12, 14	Enhanced Isolation Voltage
PLA192	BI+	600	150	22	5	5 / 5	5000	1	12, 14	Enhanced Isolation Voltage
PLA193	BI+	600	100	50	5	5 / 5	5000	10	12, 14	Enhanced Isolation Voltage
PLA194	BI+	600	130	35	2	3 / 2	5000	1	12, 14	Enhanced Isolation Voltage
XCA170	BI+	350	100	50	5	5 / 5	3750	1	12, 14	

## 1-Form-A Relays: Quad Single-Pole, Normally Open

See Page 34 for full details. The CPC7514 Quad High Voltage Isolated Analog Switch Array provides the switching functionality of four independent 1-Form-A relays in a single small economical package. Designed to provide flexible single-ended or differential access to high voltage networks, up to 320V, the CPC7514 is configured as two sets of matched-pair switches. The CPC7514 is self-biasing, and requires no external power supply. Shown to the right is one 2-switch channel.

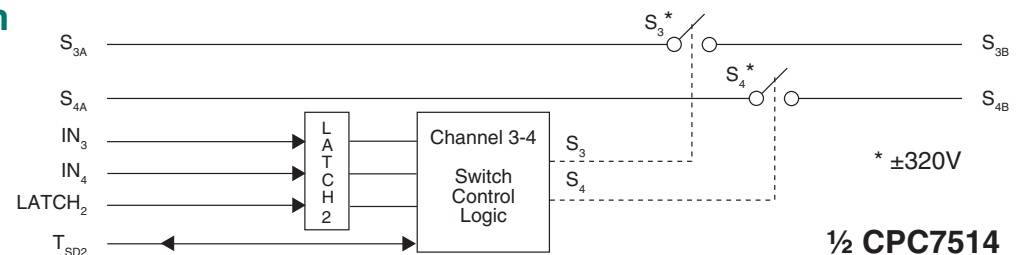

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)




## 1-Form-A Relays: Dual Single-Pole, Normally Open

	Part Number	Relay Type	Blocking Voltage	Load Current	On Resistance	Input Control Current	Switching Speeds	Isolation Voltage	Off-State Leakage	Package Type	Features and Comments
			(V <sub>p</sub> )	(mA)	(Ω)	(mA)	t <sub>on</sub> / t <sub>off</sub> (ms)	(V <sub>rms</sub> )	(μA)		
	CPC2014N	BI	60	400	2	2	2 / 1	1500	1	17	EN50130-4
	CPC2017N	BI	60	120	16	1	3 / 3	1500	1	17	Low I <sub>E</sub> , EN50130-4
<b>NEW!</b>	CPC2025N	BI	400	120	30	2	2 / 1	1500	1	17	
<b>NEW!</b>	CPC2030N	BI	350	120	30	2	2 / 1	1500	1	17	
	LAA100	BI	350	120	25	5	5 / 5	3750	1	20, 21, 22	
	LAA100L	BI	350	120	25	5	5 / 5	3750	1	20, 21, 22	Current Limiting
	LAA108	BI	100	300	8	2	3 / 3	3750	1	20, 21, 22	
	LAA110	BI	350	120	35	5	3 / 3	3750	1	20, 21, 22	
	LAA110L	BI	350	120	35	5	3 / 3	3750	1	20, 21, 22	Current Limiting
	LAA120	BI	250	170	20	5	5 / 5	3750	1	20, 21, 22	
	LAA120L	BI	250	170	20	5	5 / 5	3750	1	20, 21, 22	Current Limiting
	LAA125	BI	350	170	16	5	5 / 5	3750	1	20, 21, 22	
	LAA125L	BI	350	150	18	5	5 / 5	3750	1	20, 21, 22	Current Limiting
	LAA126	BI	250	170	15	5	5 / 5	3750	1	20, 22	
	LAA126L	BI	250	170	20	5	5 / 5	3750	1	20, 22	Current Limiting
	LAA127	BI	250	200	10	5	5 / 5	3750	1	20, 21, 22	
	LAA127L	BI	250	170	10	5	5 / 5	3750	1	20, 21, 22	Current Limiting
	LAA710	BI	60	1000	0.5	10	2.5 / 0.25	3750	1	20, 22	
	OAA160	BI	250	50	100	3	0.125 / 0.125	3750	0.025	20, 21, 22	Very Low I <sub>LEAK</sub> , Fast Switching Times
	PAA110	BI	400	150	22	5	1 / 0.25	3750	1	20, 21, 22	
	PAA110L	BI	400	150	25	5	1 / 0.5	3750	1	20, 21, 22	Current Limiting
<b>NEW!</b>	PAA127	BI	280	200	10	3	0.5 / 0.5	3750	0.025	20, 21, 22	Very Low I <sub>LEAK</sub> , Fast Switching Times
	PAA132	BI	60	600	1	2	5 / 2	3750	1	20, 22	
	PAA140	BI	400	250	8	5	3 / 1	3750	1	20, 21, 22	
	PAA140L	BI	400	200	13	5	5 / 3	3750	1	20, 21, 22	Current Limiting
	PAA150	BI	250	250	7	5	2.5 / 0.5	3750	1	20, 21, 22	
	PAA190	BI	400	150	22	5	1 / 0.5	5000	1	20, 22	Enhanced Isolation Voltage
	PAA191	BI	400	250	8	5	3 / 1	5000	1	20, 22	Enhanced Isolation Voltage
	PAA193	BI	600	100	50	5	5 / 5	5000	10	20, 22	Enhanced Isolation Voltage
	XAA117	BI	60	150	16	1	5 / 5	3750	1	20, 21, 22	Low I <sub>E</sub>
	XAA170	BI	350	100	50	5	5 / 5	3750	1	20, 21, 22	


For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

## 1-Form-B Relays: Single-Pole, Normally Closed

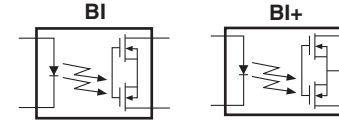

Part Number	Relay Type	Blocking Voltage	Load Current	On Resistance	Input Control Current	Switching Speeds	Isolation Voltage	Off-State Leakage	Package Type	Features and Comments
		(V <sub>p</sub> )	(mA)	(Ω)	(mA)	t <sub>on</sub> / t <sub>off</sub> (ms)	(V <sub>rms</sub> )	(μA)		
CPC1106N	BI	60	75	10	0.5	10 / 10	1500	1	10	Low I <sub>F</sub> , EN50130-4
CPC1117N	BI	60	150	16	1	10 / 10	1500	1	10	Low I <sub>F</sub> , EN50130-4
<b>NEW!</b> CPC1125N	BI	400	100	35	2	2 / 2	1500	1	10	
CPC1130N	BI	350	120	30	2	2 / 2	1500	5	10	
CPC1135N	BI	350	120	35	2	2 / 2	1500	5	10	
CPC1150N	BI	350	120	50	2	1 / 2	1500	5	10	
CPC1231N	BI	350	120	30	2	2 / 2	1500	5	10	EN/IEC60950-1 Supplementary Isolation Voltage (0.4mm Distance Through Isolation)
CPC1333	BI	350	130	30	2	2 / 3	5000	1	42, 43	Enhanced Isolation Voltage
LCB110	BI+	350	120	35	5	3 / 3	3750	1	12, 14	
LCB111	BI+	350	120	35	2	5 / 5	3750	1	12, 14	
LCB120	BI+	250	170	20	5	5 / 5	3750	1	12, 14	
LCB126	BI+	250	170	15	5	5 / 5	3750	1	12, 14	
LCB127	BI+	250	200	10	5	5 / 5	3750	1	12, 14	
LCB710	BI+	60	1000	0.6	2	3 / 3	3750	1	12, 14	High Load Current
LCB716	BI+	60	500	2	2	3 / 3	3750	1	12, 14	
PLB150	BI+	250	250	7	5	1 / 2.5	3750	1	12, 14	
PLB190	BI+	400	130	25	2	1 / 2.5	5000	1	12, 14	Enhanced Isolation Voltage
XCB170	BI+	350	100	50	5	5 / 5	3750	1	12, 14	


## 1-Form-B Relays: Dual Single-Pole, Normally Closed



Part Number	Relay Type	Blocking Voltage	Load Current	On Resistance	Input Control Current	Switching Speeds	Isolation Voltage	Off-State Leakage	Package Type	Features and Comments
		(V <sub>p</sub> )	(mA)	(Ω)	(mA)	t <sub>on</sub> / t <sub>off</sub> (ms)	(V <sub>rms</sub> )	(μA)		
<b>NEW!</b> CPC2125N	BI	400	100	35	2	2 / 2	1500	1	17	
LBB110	BI	350	120	35	5	3 / 3	3750	1	20, 21, 22	
LBB120	BI	250	170	20	5	5 / 5	3750	1	20, 22	
LBB126	BI	250	170	15	5	5 / 5	3750	1	20, 21, 22	
LBB127	BI	250	200	10	5	5 / 5	3750	1	20, 21, 22	
PBB150	BI	250	250	7	5	2.5 / 2.5	3750	1	20, 21, 22	
<b>NEW!</b> PBB190	BI	400	130	25	2	1 / 2.5	5000	1	20, 22	
XBB170	BI	350	100	50	5	5 / 5	3750	1	20, 21, 22	


For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

## 1-Form-A & 1-Form-B Relays: Combination Form-A & Form-B



Part Number	Relay Type	Blocking Voltage	Load Current	On Resistance	Input Control Current	Switching Speeds	Isolation Voltage	Off-State Leakage	Package Type	Features and Comments
		(V <sub>p</sub> )	(mA)	(Ω)	(mA)	t <sub>on</sub> / t <sub>off</sub> (ms)	(V <sub>rms</sub> )	(μA)		
CPC2317N	BI	60	120	16	1	3 / 3	1500	1	17	Low I <sub>F</sub>
CPC2330N	BI	350	120	30	2	3 / 3	1500	1	17	
LBA110	BI	350	120	35	2	3 / 3	3750	1	20, 21, 22	
LBA110L	BI	350	120	35	5	3 / 3	3750	1	20, 21, 22	Current Limiting
LBA120	BI	250	170	20	5	5 / 5	3750	1	20, 21, 22	
LBA120L	BI	250	170	20	5	5 / 5	3750	1	20, 22	Current Limiting
LBA126	BI	250	170	15	5	5 / 5	3750	1	20, 21, 22	
LBA126L	BI	250	150	20	5	5 / 5	3750	1	20, 22	Current Limiting
LBA127	BI	250	200	10	5	5 / 5	3750	1	20, 21, 22	
LBA127L	BI	250	150	15	5	5 / 5	3750	1	20, 22	Current Limiting
LBA710	BI	60	1000	0.6	2	5 / 5	3750	1	20, 22	High Load Current
LBA716	BI	60	1000	0.4	2	5 / 5	3750	1	20, 22	High Load Current
PBA150	BI	250	250	7	5	2.5 / 2.5	3750	1	20, 22	
XBA170	BI	350	100	50	2	5 / 5	3750	1	20, 21, 22	


## 1-Form-A Relays: Single-Pole, Normally Open, Unidirectional (DC-Only)



Part Number	Relay Type	Blocking Voltage	Load Current	On Resistance	Input Control Current	Switching Speeds	Isolation Voltage	Off-State Leakage	Package Type	Features and Comments
		(V <sub>p</sub> )	(mA)	(Ω)	(mA)	t <sub>on</sub> / t <sub>off</sub> (ms)	(V <sub>rms</sub> )	μA		
CPC1002N	UNI	60	700	0.55	2	5 / 2	1500	1	10	EN50130-4
CPC1004N	UNI	100	300	4	2	3 / 1	1500	1	10	Extended Operating Temperature Range: -40°C to +110°C


For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

## 1-Form-A Relays: Single-Pole, Normally Open, Voltage-Controlled




Part Number	Relay Type	Blocking Voltage	Load Current	On Resistance	Input Control Voltage	Switching Speeds	Isolation Voltage	Off-State Leakage	Package Type	Features and Comments
		(V <sub>p</sub> )	(mA)	(Ω)	(V)	t <sub>on</sub> / t <sub>off</sub> (ms)	(V <sub>rms</sub> )	(μA)		
CPC1215	BI	400	500	6	5 - 12	5 / 3	3750	1	61	Direct drop-in reed relay replacement
CPC1217	BI	60	200	16	5 - 12	5 / 5	2500	1	41	EN50130-4, Direct drop-in reed relay replacement
CPC1218	BI	60	600	1.1	5 - 12	5 / 5	2500	1	41	EN50130-4, Direct drop-in reed relay replacement

## 1-Form-B Relays: Single-Pole, Normally Closed, Voltage-Controlled




Part Number	Relay Type	Blocking Voltage	Load Current	On Resistance	Input Control Voltage	Switching Speeds	Isolation Voltage	Off-State Leakage	Package Type	Features and Comments
		(V <sub>p</sub> )	(mA)	(Ω)	(V)	t <sub>on</sub> / t <sub>off</sub> (ms)	(V <sub>rms</sub> )	(μA)		
CPC1219	BI	60	200	16	5 - 12	5 / 5	2500	1	41	EN50130-4, Direct drop-in reed relay replacement

## 2-Form-A Relays: Common Input, Dual-Pole, Normally Open



Part Number	Relay Type	Blocking Voltage	Load Current	On Resistance	Input Control Current	Switching Speeds	Isolation Voltage	Off-State Leakage	Package Type	Features and Comments
		(V <sub>p</sub> )	(mA)	(Ω)	(mA)	t <sub>on</sub> / t <sub>off</sub> (ms)	(V <sub>rms</sub> )	(μA)		
LCA210	BI	350	85	35	8	3 / 3	3750	1	20, 22	
LCA210L	BI	350	100	35	8	4 / 4	3750	1	20, 22	Current Limiting
LCA211	BI	350	85	35	8	1 / 1.2	3750	1	20, 22	
LCA220	BI	250	120	20	10	5 / 5	3750	1	20, 22	

## 1-Form-C Relays: Common Input



Part Number	Relay Type	Blocking Voltage	Load Current	On Resistance	Input Control Current	Switching Speeds	Isolation Voltage	Off-State Leakage	Package Type	Features and Comments
		(V <sub>p</sub> )	(mA)	(Ω)	(mA)	t <sub>on</sub> / t <sub>off</sub> (ms)	(V <sub>rms</sub> )	(μA)		
LCC110	BI	350	120	35	8	4 / 4	3750	1	20, 21, 22	
LCC120	BI	250	170	20	10	5 / 5	3750	1	20, 22	

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

## Multifunction SSR Products


The OptoMOS line of Multifunction products combines optically isolated discrete component functions into a single package. These products mix and match solid state relays, optocouplers, and Darlington transistors to create highly functional circuits in a single, small package. Multifunction devices allow designers to consolidate circuit functions into a single device, freeing up valuable board space and reducing component count.

### Features:





- 3750V<sub>rms</sub> Input to Output Isolation
- Multiple Functionality in a Single Package
- Current Limiting (Part Numbers with “L” Suffix)
- Machine Insertable, Wave Solderable
- TTL and CMOS Compatible

### Applications:

- Telecommunication / Datacommunication
- Instrumentation
- I/O Subsystems / Electronic Switching
- Medical Equipment (Patient / Equipment Isolation)
- Security
- Aerospace
- Industrial Controls

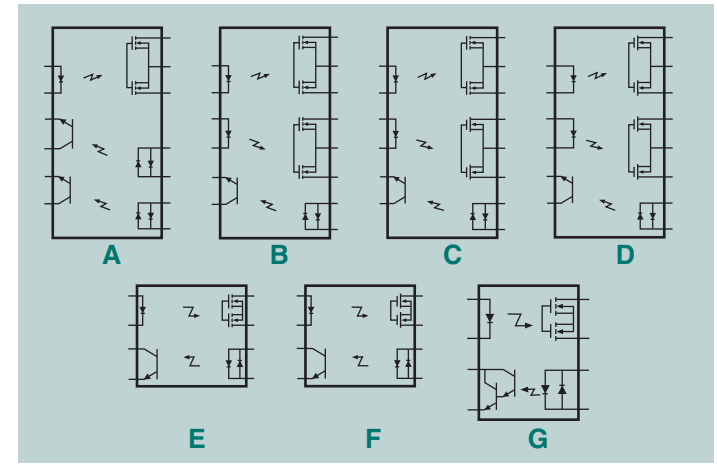

Part Number	Style	Relay Characteristics				Optocoupler Characteristics				Isolation Voltage (V <sub>rms</sub> )	Package Type	Features and Comments
		Blocking Voltage (V <sub>p</sub> )	Current Handling (mA)	On Resistance (Ω)	Input Control Current (mA)	Breakdown Voltage (V)	Current Transfer Ratio (%)	Saturation Voltage (V)	Input Control Current (mA)			
IAA110	B	350	100	35	5	20	33	0.5	6	3750	4	Two 1-Form-A Relays, One Optocoupler
IAA170	B	350	100	50	5	20	33	0.5	6	3750	4	Two 1-Form-A Relays, One Optocoupler
IAB110	C	350	100	35	5	20	33	0.5	6	3750	4	One 1-Form-A Relay, One 1-Form-B Relay, One Optocoupler
IAD110	A	350	100	35	5	20	33	0.5	6	3750	4	One 1-Form-A Relay, Two Optocouplers
IAD170	A	350	100	50	5	20	33	0.5	6	3750	4	One 1-Form-A Relay, Two Optocouplers
IBB110	D	350	100	35	5	20	33	0.5	6	3750	4	Two 1-Form-B Relays, One Optocoupler
TS117	E	350	120	35	2	20	33	0.5	6	3750	20, 21, 22	One 1-Form-A Relay, One Optocoupler
TS117L	E	350	120	35	2	20	33	0.5	6	3750	20, 21, 22	One Current-Limiting 1-Form-A Relay, One Optocoupler
TS118	F	350	120	35	5	20	33	0.5	6	3750	20, 21, 22	One 1-Form-B Relay, One Optocoupler
TS120	G	350	120	35	5	20	300	0.8	2	3750	20, 21, 22	One 1-Form-A Relay, One Darlington Optocoupler
TS120L	G	350	120	35	5	20	300	0.8	2	3750	20, 21, 22	One Current-Limiting 1-Form-A Relay, One Darlington Optocoupler
TS122	E	250	170	20	5	20	33	0.5	6	3750	20, 21, 22	One 1-Form-A Relay, One Optocoupler
TS190	E	400	150	22	5	20	33	0.5	6	3750	20, 21, 22	One 1-Form-A Relay, One Optocoupler
TS190L	E	400	150	25	5	20	33	0.5	6	3750	20, 21, 22	One Current-Limiting 1-Form-A Relay, One Optocoupler
XS170	E	350	100	50	2	20	33	0.5	6	3750	20, 22	One 1-Form-A Relay, One Optocoupler

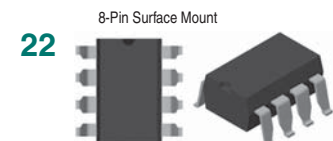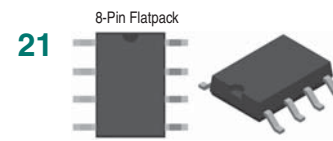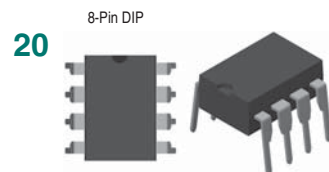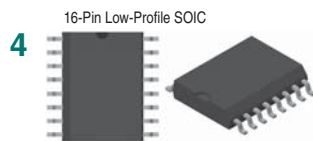

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)



# Integrated Protection Solid State Relay Series

## Current Limited SSRs with Thermal Management

These specialized OptoMOS relays are single-pole, normally open (1-Form-A) Solid State Relays with an integrated current limit feature that can replace electromechanical relays while enhancing the robustness of wireline-interface applications. They are constructed using a GaAlAs LED for actuation control and an integrated monolithic die for the switch output. The active current-limit circuitry in these relays also has a thermal management feature that provides excellent power cross immunity for improved survivability in harsh environments. These features greatly improve the robustness of end systems that use these devices, when compared to systems using relays without integrated current limit. These devices may be used in both unidirectional DC applications as well as bidirectional AC applications.

CPC1540 and CPC1563 incorporate an additional safety feature, voltage limiting, that quickly shuts the device down if a high voltage transient, >100V, occurs in the load while current limiting is in effect. These two devices are ideal for use in noisy environments where such transients can be expected.

### Features:



- Integrated Active Current-Limit Protection
- Thermal Management
- Low Input Control Current
- Low Drive Power Requirements
- 3750V<sub>rms</sub> Isolation, Input-to-Output

### Applications:

- Telephony Hook Switch
- VoIP Gateways
- I/O Subsystems
- Electronic Switching
- Medical Equipment (Patient / Equipment Isolation)
- Security
- Aerospace
- Industrial Controls

Part Number	Blocking Voltage (V <sub>p</sub> )	Input Control Current (mA)	On-Resistance (Maximum)		Load Current (Maximum)		Current Limit (Maximum)		* Over-Voltage Threshold (V)	Switching Speed t <sub>on</sub> / t <sub>off</sub> (ms)	Isolation Voltage (V <sub>rms</sub> )	Package Type	Features & Comments
			DC-Only (Ω)	AC (Ω)	DC-Only (mA)	AC (mA)	DC-Only (mA <sub>p</sub> )	AC (mA <sub>p</sub> )					
CPC1510	250	2	3.75	15	350	200	920	450	-	2 / 2	3750	12, 14	Industrial Applications
<b>NEW!</b> CPC1540	350	2	6.75	25	250	120	570	285	100	2 / 2	3750	12, 14	PSTN Hook Switch Applications
CPC1560	60	1.1	1.4	5.6	600	300	1500	900	-	0.1 / 0.4	3750	20, 22	Fast Switching Speeds
<b>NEW!</b> CPC1563	600	2	11.75	35	250	120	570	285	100	2 / 2	3750	12, 14	High Blocking Voltage

\* Provides additional current limiting after primary current limit has been enabled due to a fault condition.

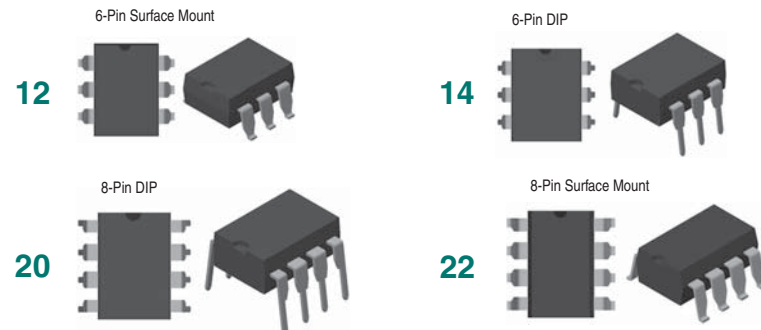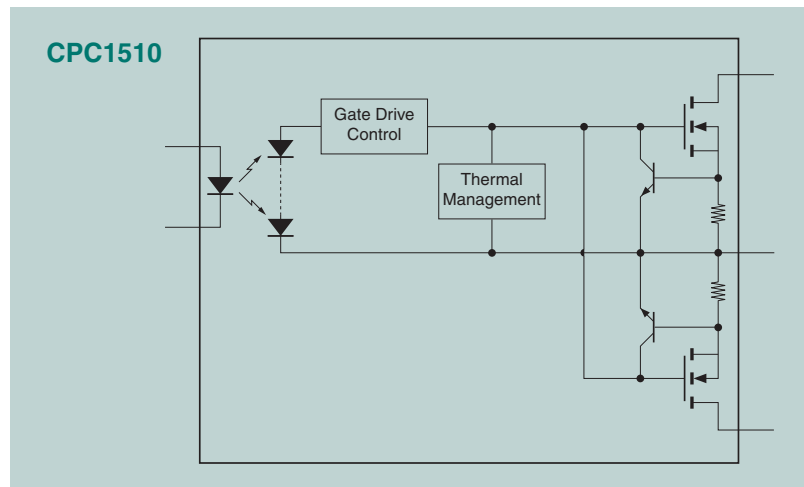

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)


## NEW! Current Limited SSR with Thermal Management & Over Voltage Protection

The new CPC1593 OptoMOS solid-state relay (SSR) adds special over-voltage protection (OVP) to current limiting and thermal management. The 21V OVP level, if enabled during current limiting, shuts the switch down, thus limiting the power dissipated by the switch and preventing damage to the device due to extended fault conditions.

The CPC1593 is designed for use in AC environments where fault conditions can persist for long periods of time, and where, upon removal of the fault, return to normal operation is expected. The CPC1593 is designed to survive extended power cross conditions.


When all fault conditions have been removed, the CPC1593 recommences normal operation, and automatically resets all of its protection circuits. No intervention is necessary.

This self-resetting triple protection scheme not only protects the CPC1593's load, but also protects the CPC1593 itself, thus creating a highly effective switching mechanism that can survive in the harshest operating environments.

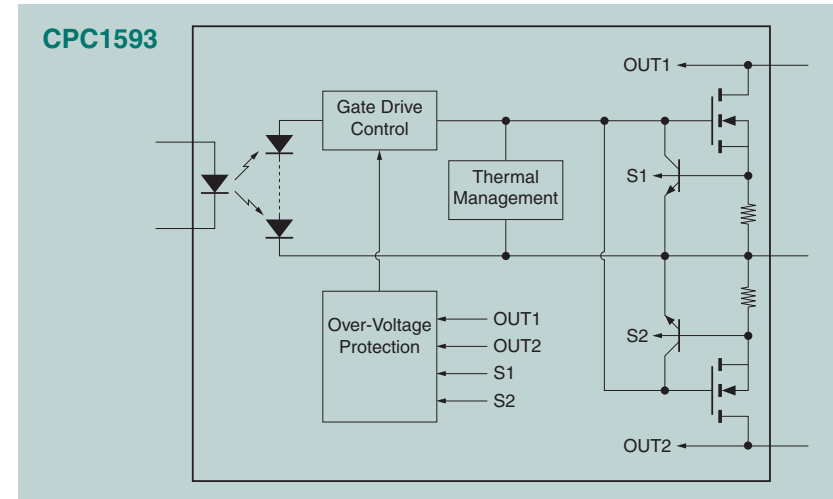

Part Number	Blocking Voltage ( $V_p$ )	On-Resistance (Maximum)		Load Current (Maximum)		Current Limit (Maximum)		Input Control Current (mA)	Switching Speed $t_{on} / t_{off}$ (ms)	Isolation Voltage ( $V_{rms}$ )	* Over-Voltage Threshold (V)	Package Type	Features & Comments
		DC-Only ( $\Omega$ )	AC ( $\Omega$ )	DC-Only (mA)	AC (mA)	DC-Only ( $mA_p$ )	AC ( $mA_p$ )						
NEW! CPC1593	600	11.75	35	250	120	570	285	2	2 / 2	3750	21	12, 14	Power Supply Start-Up Protection

\* Provides additional current limiting after primary current limit has been enabled due to a fault condition.

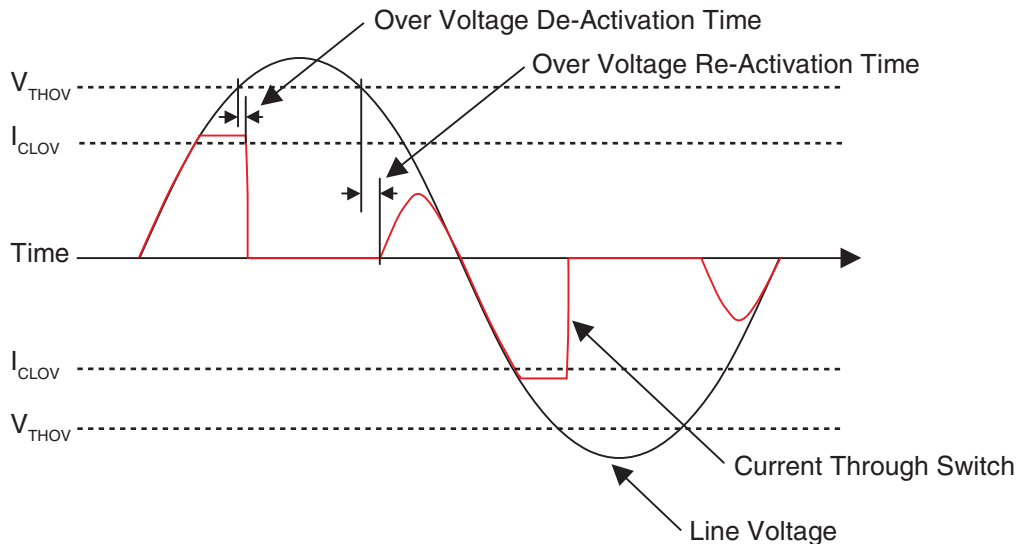

**Ensures Power-Cross Survival!**

**Features:**

- 600V<sub>p</sub> Blocking Voltage
- Integrated Active Current-Limit Protection
- Integrated Thermal Regulation
- Integrated Over-Voltage Protection



For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

## Power Relays

IXYS Integrated Circuits Division line of power relays features OptoMOS technology, reliability, and compact size in the Power SIP, i4-PAC™ and ISOPLUS™-264 series of power solid state relays. Development of these products was founded on the blending of our traditional strengths in the design and manufacture of photovoltaic integrated circuits (ICs), leadframe design, and multi-chip packaging with IXYS' expertise in power MOSFETs, power packages, and substrate technology.

Our Power Relays are now offered in three package types, all of which offer 2500V<sub>rms</sub> of input to output isolation: the Power SIP, the i4-PAC package, and the ISOPLUS-264 package. The Power SIP package offers pin-to-pin compatibility with other solid state relays providing an easy upgrade path for existing designs, and compatibility for new designs. The i4-PAC and the ISOPLUS-264 packages feature a unique assembly process whereby the silicon is soft soldered onto a Direct Copper Bond (DCB) substrate rather than traditional bonding onto an epoxy encapsulated copper frame. This structure allows for a substantially lower junction-to-case thermal impedance when compared to conventionally assembled power relays. The i4-PAC package has a thermal resistance of 0.35°C/W while the ISOPLUS-264 package has an even lower thermal impedance of 0.30°C/W.

Our Power SSRs are provided in two types: Unidirectional (UNI) and Bidirectional (BI). The polarity independent BI relay conducts load current in both directions, while the polarity dependent UNI relay conducts load current in only one direction. The accompanying tables reference these two types for all devices listed.

On the back of these packages, the electrically non-conductive surface of the DCB ceramic substrate provides 2500V<sub>rms</sub> of isolation to the package's electrically conductive power switching and control leads. The combination of an electrically isolated, non-conductive exterior and low thermal impedance makes the new i4-PAC and ISOPLUS-264 power relays an ideal solution for power applications preferring a non-biased heat sink with superior thermal management properties.


### Features:

- Handles Loads up to 32A
- Voltage Ratings up to 1000V<sub>p</sub>
- Low On-Resistance
- Electrically Non-Conductive Thermal Pad for Heat Sink Applications
- Industry Standard 4-Pin SIP Package
- Low Input Control Current
- Low Thermal Impedances:
  - 0.30°C/W - ISOPLUS-264
  - 0.35°C/W - i4-PAC
  - 1.50°C/W - Power SIP

### Applications:



- Robotics
- Medical Equipment
- Railroad / Traffic Controls
- Consumer Appliances
- Industrial Control
- Test and Measurement Equipment

## 1-Form-A Power Relays: Single-Pole, Bidirectional




Part Number	Relay Type	Blocking Voltage (V <sub>p</sub> )	Load Current		On Resistance (Ω)	Input Control Current (mA)	Switching Speeds t <sub>on</sub> / t <sub>off</sub> (ms)	Isolation Voltage (V <sub>rms</sub> )	Off-State Leakage (μA)	Package Type
			Free Air (A <sub>rms</sub> )	T <sub>c</sub> =25°C (A <sub>rms</sub> )						
CPC1906Y	BI	60	2	-	0.3	10	10 / 5	2500	1	Power SIP
CPC1908J	BI	60	3.5	15	0.3	10	20 / 5	2500	1	i4-PAC
CPC1909J	BI	60	6.5	15	0.1	10	25 / 10	2500	1	ISOPLUS-264
CPC1916Y	BI	100	2.5	-	0.34	10	5 / 3	2500	1	Power SIP
CPC1918J	BI	100	5.25	15	0.1	10	25 / 10	2500	1	ISOPLUS-264
CPC1926Y	BI	250	0.7	-	1.4	10	10 / 10	2500	1	Power SIP
CPC1927J	BI	250	2.7	15	0.2	10	25 / 10	2500	1	ISOPLUS-264
CPC1967J	BI	400	1.35	13.15	0.85	10	20 / 5	2500	1	i4-PAC
CPC1973Y	BI	400	0.35	-	5	10	5 / 3	2500	1	Power SIP
CPC1977J	BI	600	1.25	12.25	1	10	20 / 5	2500	1	i4-PAC
CPC1978J	BI	800	0.75	7.25	2.3	10	20 / 5	2500	1	i4-PAC
CPC1979J	BI	600	1.4	14.5	0.75	10	25 / 5	2500	1	ISOPLUS-264
CPC1981Y	BI	1000	0.18	-	18	10	10 / 5	2500	1	Power SIP
CPC1983Y	BI	600	0.5	-	6	5	5 / 2	2500	1	Power SIP
CPC1986J	BI	1000	0.65	6.5	3	10	20 / 5	2500	1	i4-PAC
CPC1988J	BI	1000	0.9	9.4	2.5	10	20 / 5	2500	1	ISOPLUS-264


### Power SIP

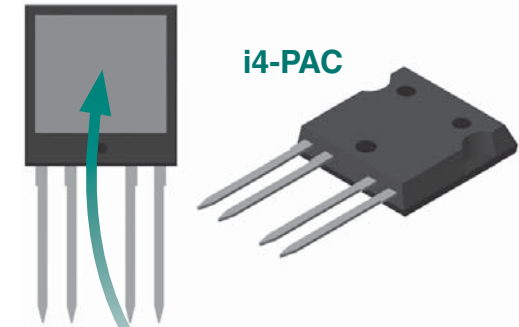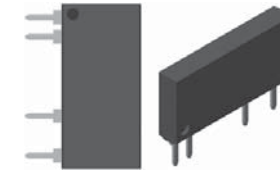

### Electrically Isolated Thermal Pad

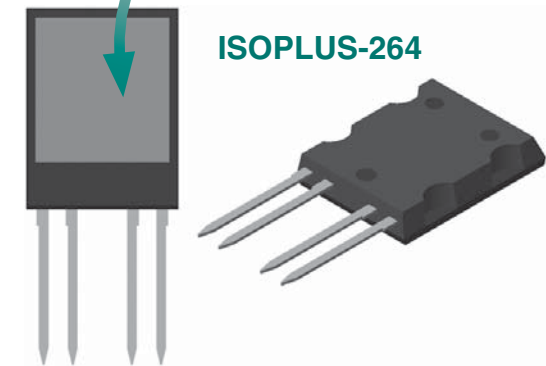

## 1-Form-A Power Relays: Single-Pole, Unidirectional



Part Number	Relay Type	Blocking Voltage (V <sub>p</sub> )	Load Current		On Resistance (Ω)	Input Control Current (mA)	Switching Speeds t <sub>on</sub> / t <sub>off</sub> (ms)	Isolation Voltage (V <sub>rms</sub> )	Off-State Leakage (μA)	Package Type
			Free Air (A)	T <sub>c</sub> =25°C (A)						
CPC1706Y	UNI	60	4	-	0.09	5	5 / 2	2500	1	Power SIP
CPC1708J	UNI	60	4	24	0.08	10	20 / 5	2500	1	i4-PAC
CPC1709J	UNI	60	9	32	0.05	10	20 / 5	2500	1	ISOPLUS-264
CPC1718J	UNI	100	6.75	32	0.075	10	20 / 5	2500	1	ISOPLUS-264
CPC1726Y	UNI	250	1	-	0.75	10	5 / 2	2500	1	Power SIP
CPC1727J	UNI	250	3.4	20	0.09	10	20 / 5	2500	1	ISOPLUS-264
CPC1777J	UNI	600	1.5	15	0.5	10	20 / 5	2500	1	i4-PAC
CPC1779J	UNI	600	1.65	15	0.4	10	20 / 5	2500	1	ISOPLUS-264
CPC1786J	UNI	1000	0.65	6.9	2	10	20 / 5	2500	1	i4-PAC
CPC1788J	UNI	1000	1	10.3	1.25	10	20 / 5	2500	1	ISOPLUS-264

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

# Optically Isolated AC Power Switches

## Optically Isolated AC Power Switches: $I_{LOAD} \leq 1A$


The OptoMOS line of power products uses dual power-SCR outputs to produce an alternative to optocoupler and Triac circuits. These AC Power Switches provide a blocking voltage of up to  $800V_p$ . In addition, tightly controlled zero-cross circuitry ensures switching of AC loads while minimizing the generation of transients. The input and output circuits are optically coupled to provide  $3750V_{rms}$  of isolation and noise immunity between control and load circuits. Long life and environmental integrity make these power switches ideal for controlling a variety of AC circuits in industrial environments where electromagnetic interference would disrupt the operation of electromechanical relays.

### Features:


- Load Current up to  $1A_{rms}$
- Blocking Voltage up to  $800V_p$
- 5mA Sensitivity
- Zero-Crossing Turn-On
- DC Control, AC Switching
- Optically Isolated
- TTL and CMOS Compatible
- Low EMI and RFI Generation
- High Noise Immunity
- VDE Compatible
- Machine Insertable, Wave Solderable
- Switching Speed < 0.5 Cycle

### Applications:

- Programmable Controls
- Process Control
- Power Control Panels
- Remote Switching
- Gas Pump Electronics
- Contactors
- Large Relay Control Circuits
- Solenoids
- Motor Controls
- Heater Controls

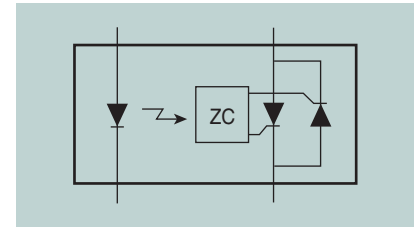

Part Number	Blocking Voltage ( $V_p$ )	Load Current ( $A_{rms}$ )	Input Control Current (mA)	Operating Frequency Min / Max (Hz)	Isolation Voltage ( $V_{rms}$ )	Package Type
CPC1943	400	0.5	5	20 - 500	3750	15, 16
CPC1945G	400	1	5	20 - 400	3750	2
CPC1945Y	400	1	5	20 - 400	3750	23
CPC1961	600	0.25	5	20 - 500	3750	20, 22
CPC1963	600	0.5	5	20 - 500	3750	15, 16
CPC1965G	600	1	5	20 - 400	3750	2
CPC1965Y	600	1	5	20 - 400	3750	23
CPC1972	800	0.25	5	20 - 500	3750	12, 14
PD1201	400	1	5	20 - 500	3750	2
PD2401	500	1	5	20 - 500	3750	2
PD2601	600	1	5	20 - 500	3750	2
PM1204	400	0.5	5	20 - 500	3750	15, 16
PM1205	500	0.5	5	20 - 500	3750	15, 16
PM1206	600	0.5	5	20 - 500	3750	15, 16
PS1201	400	1	5	20 - 500	3750	23
PS2401	500	1	5	20 - 500	3750	23
PS2601	600	1	5	20 - 500	3750	23

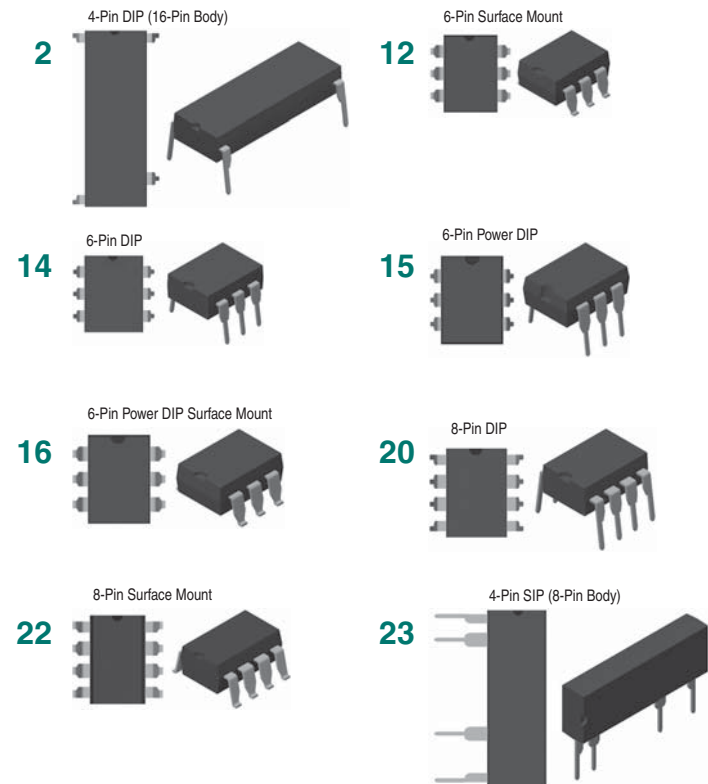

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

# Optically Isolated AC Power Switches: $I_{LOAD} > 1A$

Introducing our new solid-state AC Power Switches that are capable of handling very high load currents. With blocking voltages up to  $800V_p$  and tightly controlled zero-cross circuitry (ensuring switching of AC loads while minimizing the generation of transients), these robust AC Power Switches enable simpler power switching designs.


Optically coupled input and output circuits provide up to  $5000V_{rms}$  of isolation and noise immunity between control and load circuits. These arc-free, heavy-duty AC power switches are ideal for controlling a variety of AC circuits in industrial environments where electromagnetic interference would disrupt the operation of electromechanical relays or where explosive atmospheres exist.

### Features:

- Load Current up to  $50A_{rms}$
- Blocking Voltage up to  $800V_p$
- 5mA Input Sensitivity
- Zero-Crossing Turn-On
- DC Control, AC Switching
- Optically Isolated I/O
- TTL and CMOS Compatible
- Low EMI and RFI Generation
- High Noise Immunity
- VDE Compatible
- Machine Insertable, Wave Solderable
- Switching Speed  $< 0.5$  Cycle

### Applications:

- Programmable Controls
- Process Control
- Power Control Panels
- Remote Switching
- Gas Pump Electronics
- Contactors
- Large Relay Control Circuits
- Solenoids
- Motor Controls
- Heater Controls

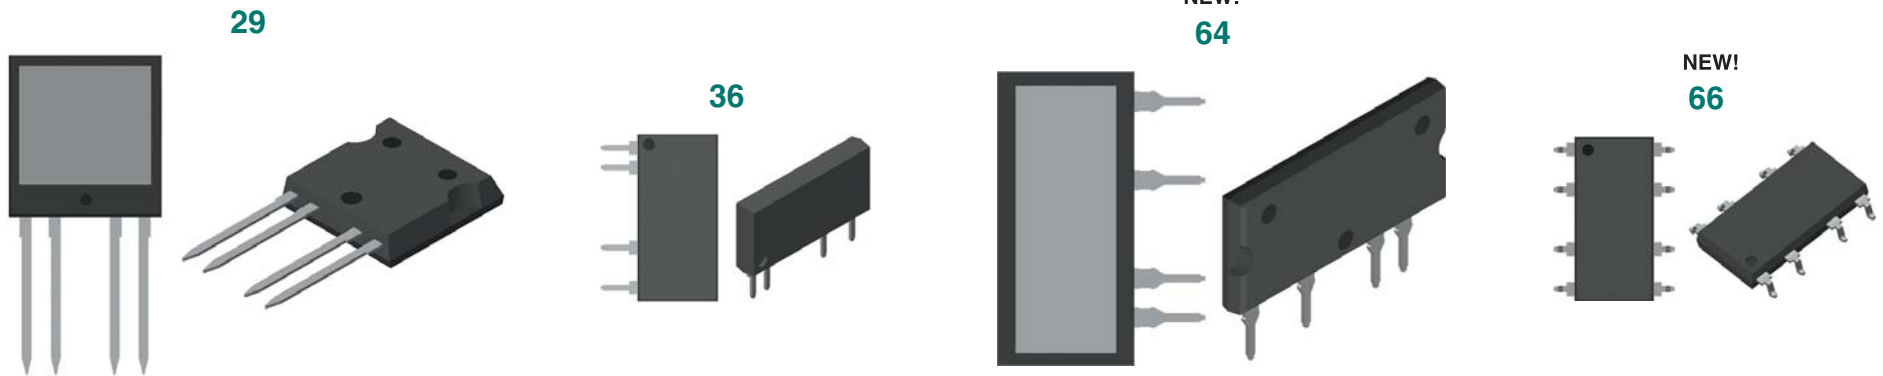

Part Number	Blocking Voltage ( $V_p$ )	Load Current			Input Control Current (mA)	Input Control Voltage (V)	Operating Frequency Min / Max (Hz)	Isolation Voltage ( $V_{rms}$ )	Package Type	Features
		No Heat Sink ( $A_{rms}$ )	With 5°C/W Heat Sink ( $A_{rms}$ )	$T_c=25^\circ C$ ( $A_{rms}$ )						
CPC1966	600	3	-	-	5	-	20 - 500	3750	36	
<b>NEW!</b> CPC1966B	800	3	-	-	5	-	20 - 500	5000	66	Power SOIC Package
CPC1976	600	2	-	-	5	-	20 - 500	3750	36	
CPC1998	800	5	20	50	5	-	20 - 500	2500	29	
<b>NEW!</b> CPC40055	800	5	20	50	5	-	20 - 500	2500	64	High Load Current
<b>NEW!</b> CPC44055	800	5	20	50	-	9 - 16	20 - 500	2500	64	High Load Current

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

# Gate Drivers

These ultra-fast, high current MOSFET and IGBT gate drivers are optimized for high efficiency performance in motor drive and power conversion applications. With output current ratings of 2A to 30A, they are designed to switch the largest MOSFETs and IGBTs with minimum switching times and at frequencies up to 10MHz. Depending on the output current rating, these gate drivers are offered in DFN, SOIC, Power SOIC, DIP, TO-220, and TO-263 packages.

The 30A IXD\_630 features an undervoltage lockout (UVLO) that keeps the output LOW until a sufficient level of  $V_{CC}$  is present.

## IXD\_600 Series Low-Side Gate Drivers



Part Number	Output Type	$I_{PEAK}$ $T_C=25^\circ C$ (A <sub>p</sub> )	Output Resistance (Ω)	Logic Configuration	Enable Function	Undervoltage Lockout (V)	Package Type
IXDF602	DUAL	2	4	F			20, 53, 54, 56
IXDI602	DUAL	2	4	D			20, 53, 54, 56
IXDN602	DUAL	2	4	E			20, 53, 54, 56
IXDD604	DUAL	4	2.5	G	•		20, 53, 54, 56
IXDF604	DUAL	4	2.5	F			20, 53, 54
IXDI604	DUAL	4	2.5	D			20, 53, 54
IXDN604	DUAL	4	2.5	E			20, 53, 54
IXDD609	SINGLE	9	1	A	•		20, 53, 54, 56, 57, 58
IXDI609	SINGLE	9	1	B			20, 53, 54, 57, 58
IXDN609	SINGLE	9	1	C			20, 53, 54, 57, 58
IXDD614	SINGLE	14	0.8	A	•		20, 53, 57, 58
IXDI614	SINGLE	14	0.8	B			20, 53, 57, 58
IXDN614	SINGLE	14	0.8	C			20, 53, 57, 58
IXDD630	SINGLE	30	0.4	A	•	$V_{CC} \leq 12.5V$	57, 58
IXDD630M	SINGLE	30	0.4	A	•	$V_{CC} \leq 9V$	57, 58
IXDI630	SINGLE	30	0.4	B		$V_{CC} \leq 12.5V$	57, 58
IXDI630M	SINGLE	30	0.4	B		$V_{CC} \leq 9V$	57, 58
IXDN630	SINGLE	30	0.4	C		$V_{CC} \leq 12.5V$	57, 58
IXDN630M	SINGLE	30	0.4	C		$V_{CC} \leq 9V$	57, 58

### Features:

- 2A to 30A Peak Source/Sink Drive Current
- Wide Operating Voltage Range: 4.5V to 35V
- -40°C to +125°C Extended Operating Temperature Range
- Logic Input Withstands Negative Swing of up to 5V
- Matched Rise and Fall Times
- Low Propagation Delay Time
- Low 10μA Supply Current
- Low Output Impedance

### Applications:

- Efficient Power MOSFET and IGBT Switching
- Switch Mode Power Supplies
- Motor Controls
- DC to DC Converters
- Class-D Switching Amplifiers
- Pulse Transformer Driver

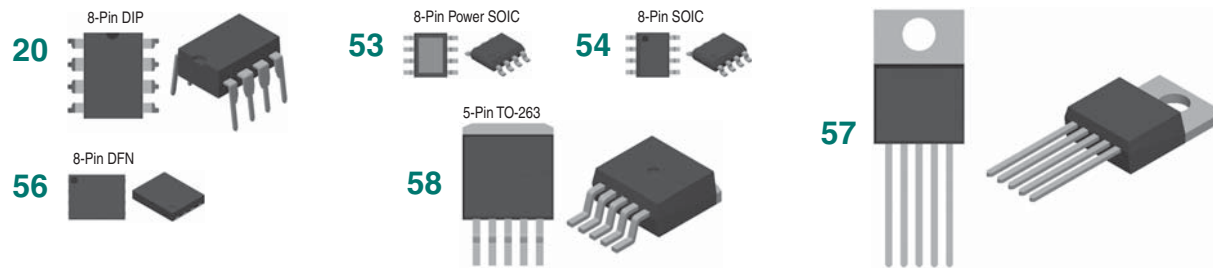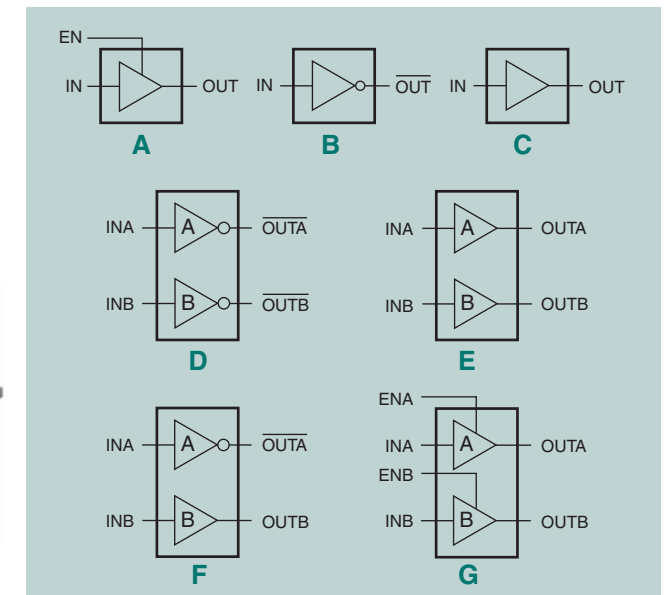

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

## IX2127 600V High-Side MOSFET and IGBT Gate Driver

The IX2127 is a high voltage, high-speed power MOSFET and IGBT driver. The device's high voltage level-shift technique enables it to operate at up to 600V. Proprietary common-mode design techniques provide stable operation in high dV/dt noise environments.



The IX2127 detects an over-current condition in the driven MOSFET or IGBT device, and shuts down drive to that device. An open-drain output, FAULT, indicates that an over-current shutdown has occurred. The gate driver output typically can source 250mA and sink 500mA, which is suitable for fluorescent lamp ballast, motor control, SMPS, and other converter drive topologies. Available in 8-pin DIP and 8-pin SOIC packages.

### Features:

- Floating Channel Designed for Bootstrap Operation up to 600V
- Tolerant to Negative Transient Voltages; dV/dt Immune
- Undervoltage Lockout
- 3.3V, 5V, and 12V Input Logic Compatible
- Open-Drain FAULT Indicator Pin Shows Over-Current Shutdown
- Output in Phase with the Input

### Applications:

- High Speed Gate Driver
- Motor Drive Inverter

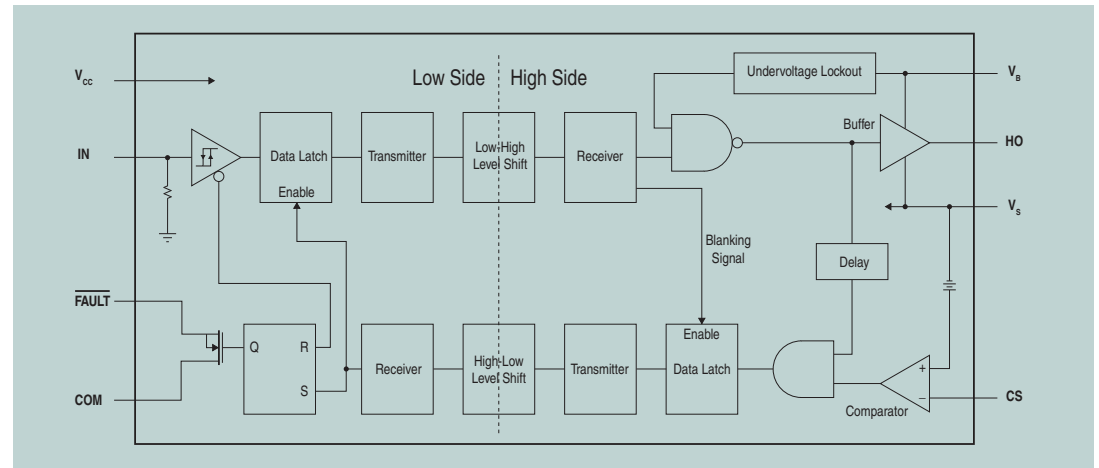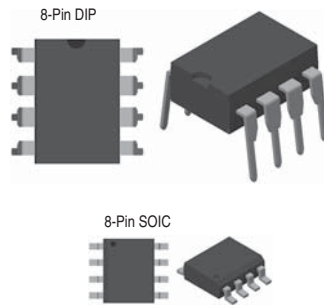

## MX6895 -550V Full Bridge Gate Driver



Built on our high voltage integrated circuit (HVIC) technology, the MX6895 combines high-side and low-side N-channel power MOSFET drivers in a full bridge configuration. The circuit is optimally configured to be used as a commutator for High Intensity Discharge (HID) lamps. This device is provided in a 16-pin SOIC package.

### Features:

- Internal High Voltage Level Shift Function
- Negative 550V Lamp Supply Voltage
- 3V to 12V CMOS Logic Compatible
- 8V to 12V Input Supply Voltage
- No External Bootstrap Capacitors Needed

### Applications:

- Commutator for High Intensity Discharge Lamps
- Vehicle Xenon Head Lamps
- Outdoor/Street Lighting
- Multimedia Projectors
- Retail Accent Lighting
- Warehouse Lighting

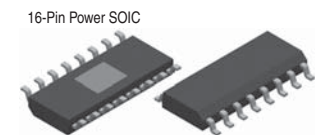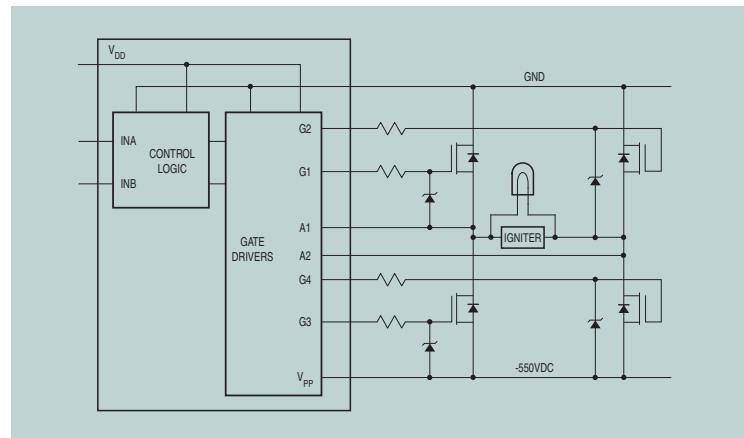

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)



## NEW! IX3120 2.5A-Output Optically Coupled Gate Driver


The IX3120 gate driver includes an input infrared LED that is optically coupled to a power output stage. The power output stage is capable of sourcing or sinking 2.5A of peak current, which is ideal for driving IGBTs and MOSFETs in the mid-power range. The gate driver optocoupler with its low input LED current, high output peak current, and high noise immunity (25kV/ $\mu$ s) is ideally suited for use in motor control and inverter applications. The IX3120 is provided in an 8-pin DIP package and an 8-pin surface mount package.

### Features:

- 2.5A Maximum Peak Output Current
- 25kV/ $\mu$ s Minimum Common Mode Rejection (CMR) at 1500V<sub>CM</sub>
- Wide Operating Voltage Range: 15V to 30V
- Under Voltage Lockout with Hysteresis
- 3750V<sub>rms</sub> Input to Output Isolation
- Wide Temperature Range: -40°C to +100°C



### Applications:

- Isolated IGBT/MOSFET Gate Drive
- Switch Mode Power Supplies
- Industrial Inverters
- Motor Drivers

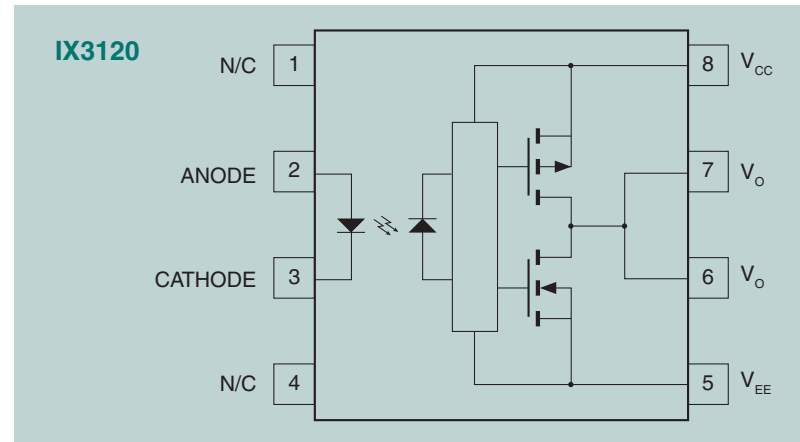

## Optically Isolated Gate Drivers

The CPC1580 and CPC1590 are high speed, optically isolated Gate Driver ICs. On-chip circuitry charges an external capacitor from the load voltage which eliminates the need for an external IC power supply. These Gate Drivers are ideal for low duty cycle switching applications. Both devices are provided in an 8-pin flatpack package.

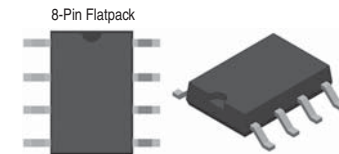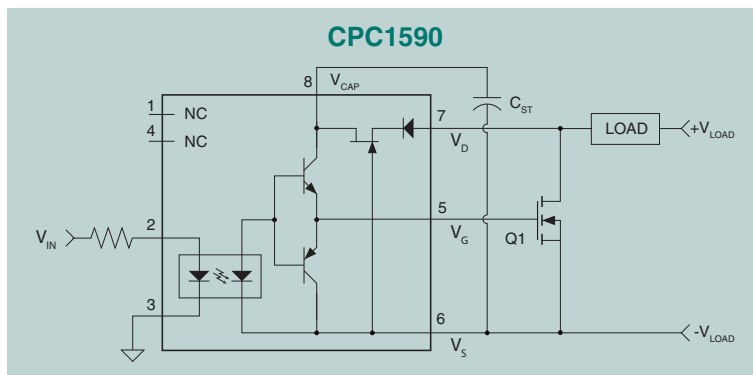

### Features:

- No External IC Power Supply
- Low Drive Power Requirements (TTL/CMOS Compatible)
- Load Voltages up to 200V
- Fast Switching Times - On: 40 $\mu$ sec / Off: 400 $\mu$ sec

### Applications:


- Instrumentation
- Multiplexers
- I/O Subsystems
- Meters (Watt-Hour, Water, Gas)
- Medical Equipment (Patient/Equipment Isolation)
- Security
- Aerospace
- Industrial Controls

Part Number	Input Control Current (mA)	Gate Voltage @ I <sub>F</sub> =5mA (V <sub>G</sub> )	Blocking Voltage (V <sub>P</sub> )	Regulated Capacitor Voltage (V <sub>CAP-MAX</sub> )	Switching Speeds (t <sub>on</sub> / t <sub>off</sub> (μs))	Isolation Voltage (V <sub>rms</sub> )
CPC1580	2.5	7.5 - 12	65	V <sub>DS</sub> - 0.2V	40 / 400	3750
CPC1590	2.5	7.5 - 12	200	16	40 / 400	3750

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

## Optically Isolated Dual MOSFET Gate Drivers

These Dual Optically Isolated Photodiode Arrays, which can produce an open-circuit voltage of up to 12V, are well suited for use in discrete solid state relay designs. The FDA215 and the FDA217 are provided in either an 8-pin DIP package or in an 8-pin surface-mount package.


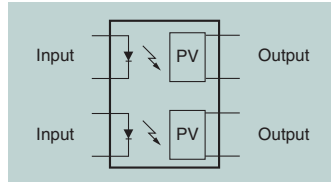


### Features:

- Isolated 5.5V to 12V Photovoltaic Output
- Floating Outputs for Parallel or Series Configuration

### Applications:

- MOSFET Driver
- Isolated Floating Power Source



Part Number	Input Control Current (mA)	Nominal Open-Circuit Voltage $V_{oc}$ (V)	Nominal Short-Circuit Current $I_{sc}$ ( $\mu$ A)	Switching Speeds $t_{on} / t_{off}$ (ms)	Isolation Voltage ( $V_{rms}$ )	Package Type
FDA215	5	5.5	2.5	5 / 5	3750	8-Pin DIP, 8-Pin Surface Mount
<b>NEW!</b> FDA217	5	12	4.5	5 / 5	3750	8-Pin DIP, 8-Pin Surface Mount

## Load Drivers: MX877 & MX879 (8-Channel, 60V, with Serial Interface)

These devices are 8-channel, high voltage switches with 8-bit parallel or serial input control. The 3-wire serial interface connects directly to a microprocessor using an industry standard protocol. These devices are designed to operate over a temperature range of  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ , and are available in a 28-pin QFN package.

**MX877**, with push-pull output configuration, can drive up to 60V at 80mA. Outputs can be paralleled for increased drive current up to a device total of 400mA sink or source.

**MX879**, with open-drain pullup output configuration, can drive up to 60V at 120mA. Outputs can be paralleled for increased drive current up to a device total of 600mA source.



### Features:

- 6V to 60V Drive Supply Voltage
- 2.7V to 5.5V Logic Supply Range
- 3-Wire Serial Interface Plus Chip Select
- Captures Serial and Parallel Input Data
- Outputs Can Be Paralleled
- Small 28-Pin QFN Package

### Applications:

- White Goods
- Automatic Test Equipment (ATE)
- Industrial Equipment
- Automotive Relay Control

28-Pin QFN

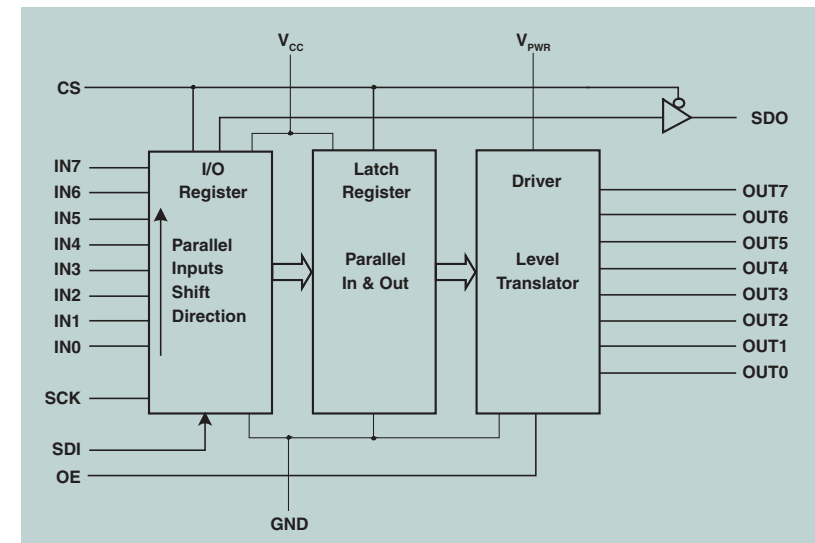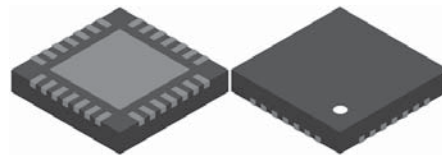

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

# High Voltage Analog Switches

Our high voltage analog switches are low charge injection 8-channel & 16-channel, high voltage analog switch ICs for use in applications requiring high voltage switching. Control of the high voltage switching is via low voltage, TTL logic level compatible inputs for direct connectivity to the system controller. Switch manipulation is managed by serial to parallel shift registers whose outputs are buffered and stored by a transparent latch. Level shifters buffer the latch outputs, and operate the high voltage switches. Construction of the switches using reliable BCDMOS process technology on SOI (Silicon On Insulator) enables the switches to be organized as solid state switches with direct gate drive.




### Features:

- Flexible High Voltage Supplies up to  $V_{pp} - V_{NN} = 200V$
- Output Switch On-Resistance Typically  $20\Omega$
- Low Charge Injection, Low Capacitance Analog Switches
- Very Low Quiescent Current: 30nA Typical
- -58dB Off-Isolation at 5MHz
- Internal Bleed Resistors: CPC7232 & CPC7701

### Applications:

- Piezoelectric Transducer Drivers
- Ultrasound Imaging
- Printers
- Industrial Controls and Measurement

Part Number	Number of Channels	Channel On-Resistance ( $\Omega$ )	Bleed Resistors (k $\Omega$ )	Clock Frequency (MHz)	Turn-On Time ( $\mu$ s)	Turn-Off Time ( $\mu$ s)	Package Type
CPC7220	8	20	-	5	5	5	50, 51
CPC7232	8	21	20 - 50	5	5	5	50, 51
<b>NEW!</b> CPC7601	16	25	-	8	5	5	50
<b>NEW!</b> CPC7701	16	25	20 - 50	8	5	5	50

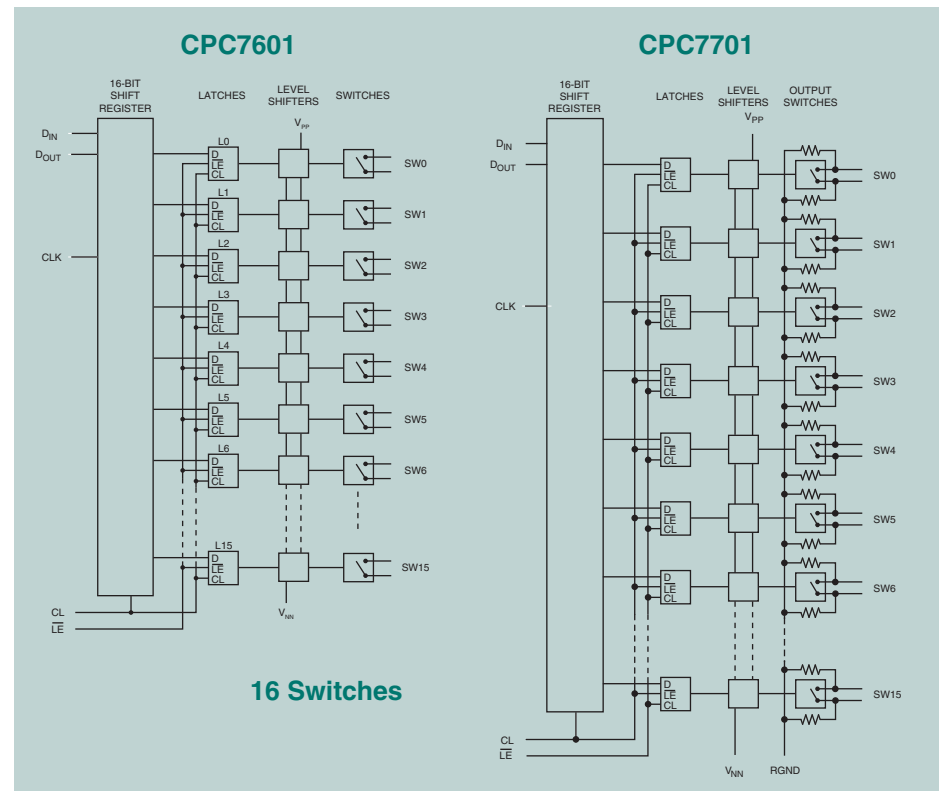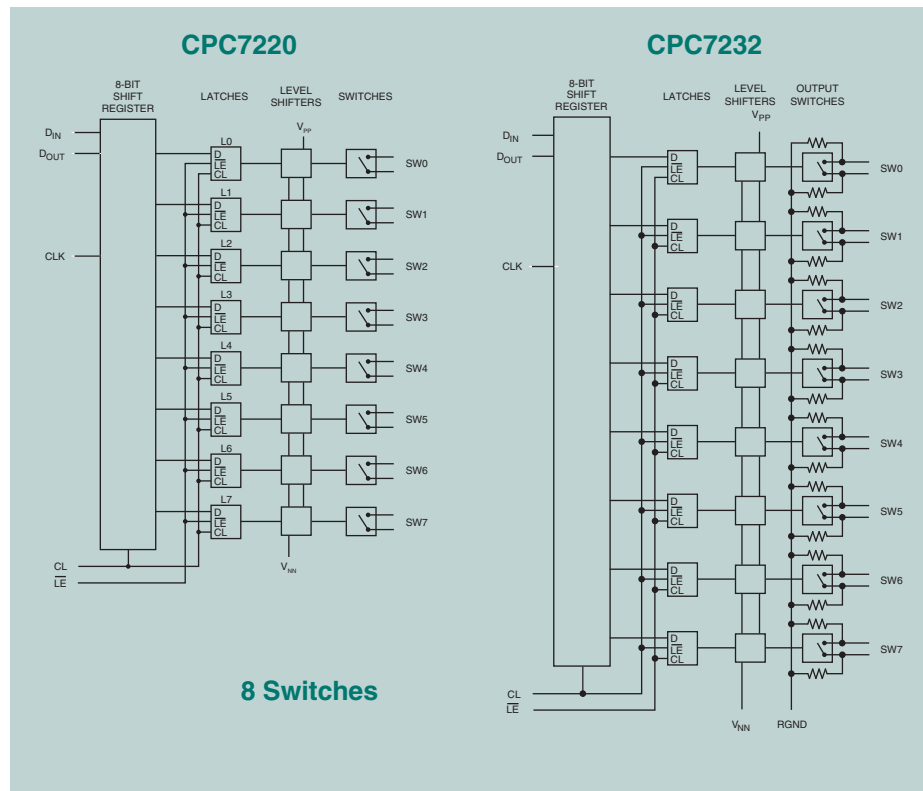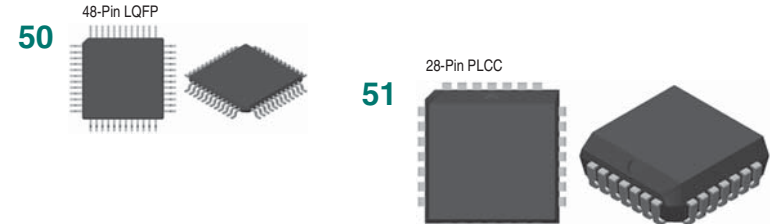


For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

# Discrete Components

## N-Channel Depletion Mode FETs

Our N-channel depletion mode Field Effect Transistors (FETs) utilize a proprietary third generation vertical DMOS process. The third generation process realizes world class, high voltage MOSFET performance in an economical silicon gate process. The vertical DMOS process yields a robust device for low-power applications with high input impedance. These highly reliable FET devices have been used extensively in our solid state relays for industrial and telecommunications applications.

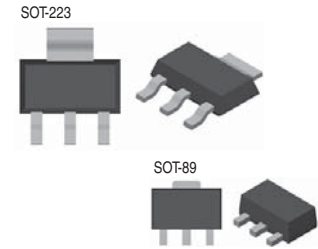

These normally-on MOSFETs are well suited for low cost, pre-regulator applications that are tolerant of high voltage drop and power dissipation between the power source and the output regulator stage. The pre-regulator is particularly effective as an inexpensive solution for filtering AC line voltage variations in non-isolated DC power supplies as compared to switch-mode power supplies or step-down transformers.

Part Number	$V_{(BR)DSX}$ (V)	$R_{DS(on)}$ Max ( $\Omega$ )	$V_{GS(off)}$ Min (V)	$V_{GS(off)}$ Max (V)	$I_{DSS}$ @ $V_{GS} = 0V$ Min (mA)	$I_D$ @ $V_{GS} = -0.57V$ Min (mA)	Package Type	Features & Comments
CPC3701	60	1	-0.8	-2.9	600	-	SOT-89	
CPC3703	250	4	-1.6	-3.9	360	-	SOT-89	
<b>NEW!</b> CPC3708	350	14	-2	-3.6	-	130	SOT-89	
CPC3710	250	10	-1.6	-3.9	220	-	SOT-89	
CPC3714	350	14	-1.6	-3.9	240	-	SOT-89	
CPC3720	350	22	-1.6	-3.9	130	-	SOT-89	
CPC3730	350	30	-1.6	-3.9	140	-	SOT-89	
CPC5602	350	14	-2	-3.6	-	130	SOT-223	Designed for Use with LITELINK Designs
CPC5603	415	14	-2	-3.6	-	130	SOT-223	Designed for Use with LITELINK Designs

## Diode Bridges

The CPC7556N integrated diode bridge offers protection from high voltage transients by means of an adjustable voltage clamp. The clamp performs two actions, first to limit the voltage across the diode bridge rectified outputs to a value determined by external resistors and the gate voltage, and second to fully discharge the  $V+$  to  $V-$  outputs when the gate's trigger threshold is exceeded during the voltage limiting function. The rectified outputs are discharged as a result of the voltage fold-back function of the OVP device. Voltage fold-back of the OVP circuit will continue until the current through the protector falls below the hold current threshold.


The CPC7557N is an integrated diode bridge built on our High Voltage SOI technology. Very small in size, this integrated diode bridge device offers a space-saving method for inclusion of a highly reliable, monolithic, full-wave bridge rectifier into today's miniature circuit designs.

### Features:


- Monolithic Construction
- Surface Mount Package

### Applications:

- Telecommunications Protection Clamp
- High Voltage Multiplexer / Switch
- High Voltage ESD Clamp

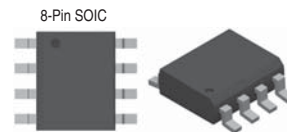

Part Number	Reverse Voltage (V)	Forward Current ( $mA_{rms}$ )	Diode $V_F$ Drop (V)	Thyristor Current (mA)	Reverse Leakage $I_{LEAK}$ ( $\mu A$ )
CPC7556	100	240	0.95	120	1
CPC7557	100	240	0.95	-	1

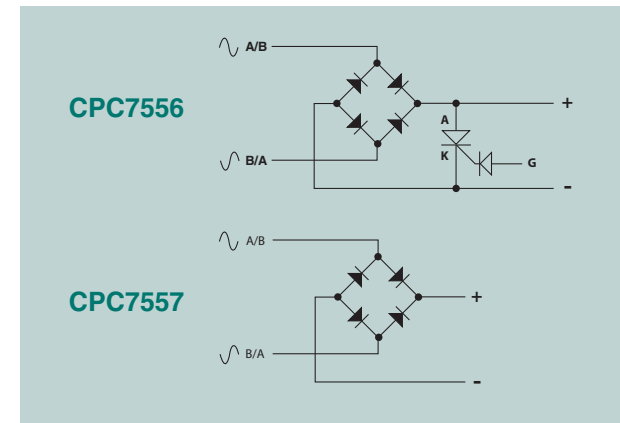

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

# High Speed Digital Optical Isolators

## NEW! CPC5902 Optically Isolated I<sup>2</sup>C Bus Repeater

The CPC5902 is a dual, optically isolated, bidirectional logic-bus repeater. It galvanically isolates two open-drain logic signals, and provides a galvanic isolation of 3750V<sub>rms</sub>. When the two sides' supply voltages are configured with different voltages, the CPC5902 also functions as a logic level translator for levels as low as 2.7V or as high as 5.5V.


Unlike transformer or capacitive isolators, this optically isolated repeater passes logic-level DC signals, and does not need to be clocked periodically to sustain logic states. Buffered signals will always return to their proper value after a transient interruption on either side. As a result, the CPC5902 does not generate the clocking or modulation signal interference that other types of bus repeaters can generate. Available in 8-pin DIP and surface mount packages.

### Features:


- Bidirectionally Buffers Both I<sup>2</sup>C Signals
- Extends and Isolates I<sup>2</sup>C Interfaces
- Supports Standard and Fast Mode I<sup>2</sup>C (400kbps)
- Supports I<sup>2</sup>C Clock Stretching
- Operates on 2.7V to 5.5V
- Supports DC Logic Level Buffering Without Refresh
- Glitch-Free Operation
- Powerdown to Hi-Z Does Not Load I<sup>2</sup>C
- Slew-Limited Drivers Reduce EMI
- Tested Above 6kV<sub>p</sub> for Adverse Environments

### Applications:

- Power Over Ethernet
- I<sup>2</sup>C Bus Length Extender
- Isolated Control and Signal Monitoring
- Power Supply High-Side Interface

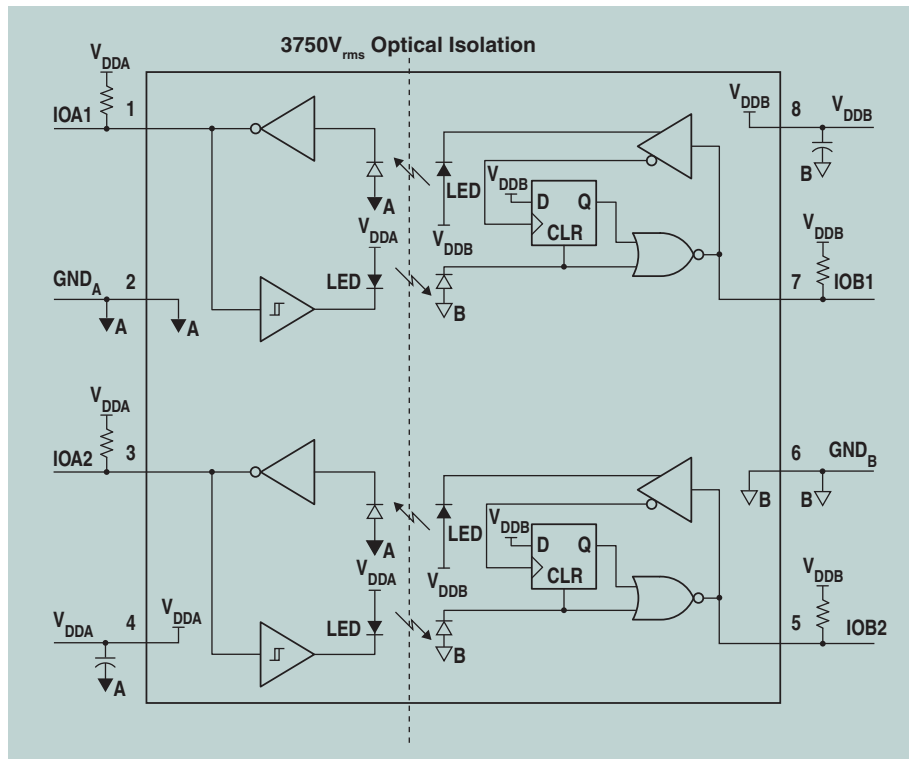


**No Internal Clock - Minimal EM & RF Emissions**  
**High Voltage Isolation**  
**Immune to External EMI and RFI**

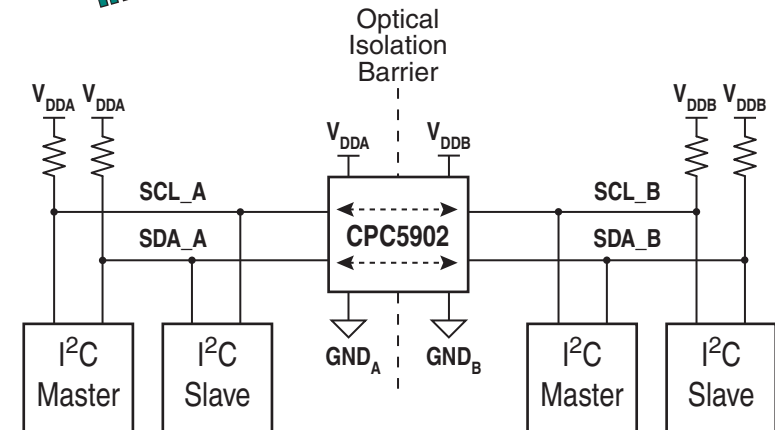

Visit our web site and download our Tech Brief, TB-101: "Optically Isolating an I<sup>2</sup>C Interface"

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

## NEW! CPC5903 Optically Isolated I<sup>2</sup>C Bus Repeater

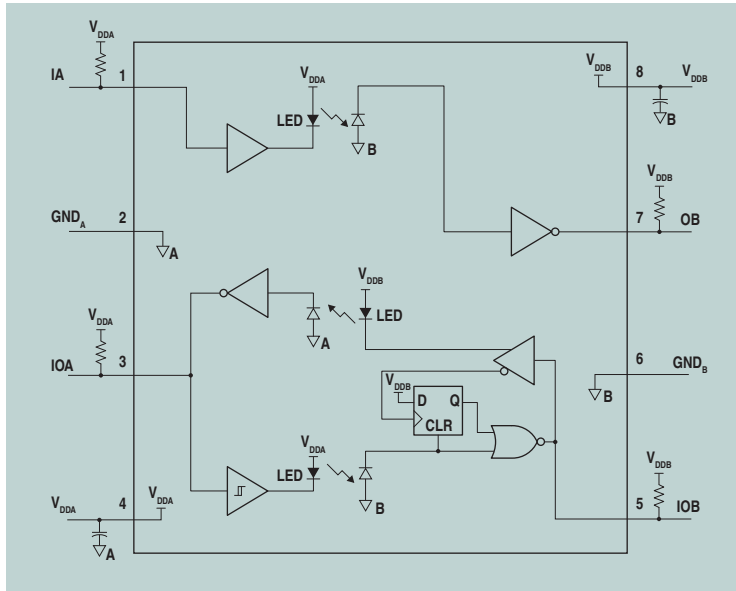

The CPC5903 is a dual, optically isolated, logic-bus repeater. It galvanically isolates two open-drain logic signals, and provides galvanic isolation across voltage differences up to 3750V<sub>rms</sub>. When the two sides are powered by different supply voltages, it also functions as a logic level translator for levels as low as 2.7V or as high as 5.5V. It enables full bidirectional isolation of the I<sup>2</sup>C data signal and unidirectional isolation of the I<sup>2</sup>C clock signal.


Unlike transformer or capacitive isolators, optical isolation passes DC logic-level signals, and does not need to be clocked periodically to refresh state. Buffered signals will always return to their proper value after a transient interruption at either side. Available in 8-pin DIP and surface mount packages.

### Features:

- Bidirectionally Buffers SDA I<sup>2</sup>C Signal
- Side A Extends and Isolates I<sup>2</sup>C Interfaces
- Standard-mode and Fast-mode I<sup>2</sup>C
- Side B Fast-mode Compliant V<sub>DDB</sub> > 4.5V
- Operates on 2.7V to 5.5V
- No Internal Clock - Low EM & RF Generation
- Voltage Level Translation
- Slew-Limited Drivers Reduce EMI
- Powerdown to Hi-Z Does Not Load I<sup>2</sup>C
- 3750V<sub>rms</sub> Galvanic Isolation

### Applications:

- Isolated Signal Monitoring and Control
- Power-over-Ethernet
- Power Supply High Side Interface
- I<sup>2</sup>C Bus Length Extenders
- I<sup>2</sup>C Logic Level Translation



## NEW! CPC5002 - Dual High-Speed Digital Optical Isolator

The CPC5002 is a high speed dual optical logic isolator with open-drain outputs. It galvanically isolates two open-drain logic signals across voltage differences up to 3750V<sub>rms</sub>. Turning on the LED forces the output to turn on, which pulls the voltage at any external pullup resistor towards ground. Its high-gain CMOS comparator requires only 1.4mA of supply current, and only 1.5mA of LED drive current. Unlike transformer or capacitive isolators, optical isolation passes DC logic-level signals, and does not need to be clocked periodically to refresh state. Buffered signals will always return to their proper value after a transient interruption at either side. Available in 8-pin DIP and surface mount packages.


### Features:

- Dual Optics Isolates Two Signals
- Operates Over 2.7V < V<sub>DD</sub> < 5.5V
- 3750V<sub>rms</sub> Galvanic Isolation
- Power-Down to Hi-Z Does Not Load Outputs
- Low-Power CMOS Reduces Supply Current
- LED Drive Current Only 1.5mA
- High Speed: 10Mbaud Typical

### Applications:

- Isolated Line Receiver
- Ground Loop Elimination
- ADC/DAC Digital Noise Isolation
- 4-Wire I<sup>2</sup>C Bus Isolation

**10 Mbaud!**

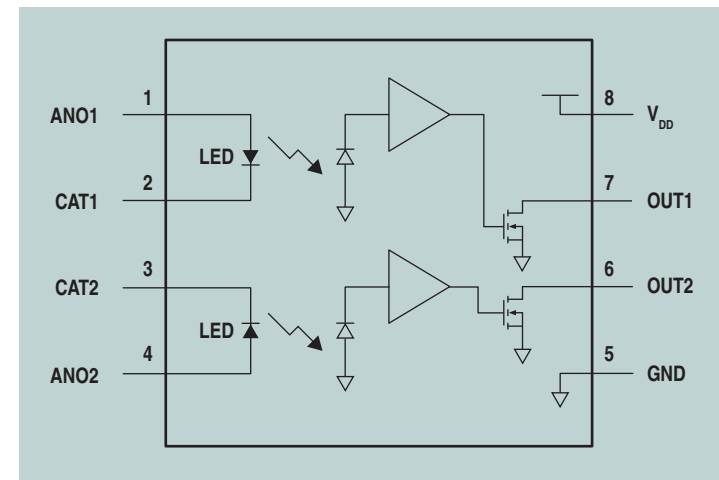

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

# Optocouplers

## Single & Dual Optocouplers

Single and dual OptoMOS optocouplers provide an optically isolated means of current detection or control of switching circuits. These devices offer a single or dual anti-parallel LED input stage for unidirectional or bidirectional signal control to the optically coupled output. The output can be either a single transistor or, for greater gain, a Darlington transistor. These optocouplers are ideal for use in circuits where electrical isolation of control circuitry or voltage detection is crucial.

### Features:


- AC and DC Compatible Inputs
- 1500V<sub>rms</sub>, 3750V<sub>rms</sub>, 5000V<sub>rms</sub> I/O Isolation
- Machine Insertable, Wave Solderable

### Applications:


- Voltage Detection
- Tip/Ring Circuits
- Modem Switching (Laptops, Notebooks, PDAs)

- Loop Detection
- Ringing Detection
- Current Sensing
- Telecom Switching


Part Number	Minimum Breakdown Voltage (BV <sub>CEO</sub> )	Typical Current Transfer Ratio (%)	Maximum Saturation Voltage (V)	Input Control Current (mA)	Minimum Isolation Voltage (V <sub>rms</sub> )	Package Type	Configuration
CPC1001N	30	330	0.3	0.2	1500	10	A
CPC1301	350	5500	1.2	1	5000	42, 43	B
CPC1302	350	5500	1.2	1	3750	20, 22	I
CPC1303	30	1000	0.5	0.2	5000	42, 43	A
LDA100	30	300	0.5	1	3750	12, 14	E
LDA101	30	300	0.5	1	3750	12, 14	C
LDA102	30	350	0.5	1	3750	12, 14	C
LDA110	30	8500	1	1	3750	12, 14	F
LDA111	30	8500	1	1	3750	12, 14	D
LDA200	30	300	0.5	1	3750	20, 22	L
LDA201	30	300	0.5	1	3750	20, 22	K
LDA202	30	300	0.5	1	3750	20, 22	H
LDA203	30	300	0.5	1	3750	20, 22	G
LDA210	30	8500	1	1	3750	20, 22	N
LDA211	30	8500	1	1	3750	20, 22	M
LDA212	30	8500	1	1	3750	20, 22	J
LDA213	30	8500	1	1	3750	20, 22	I

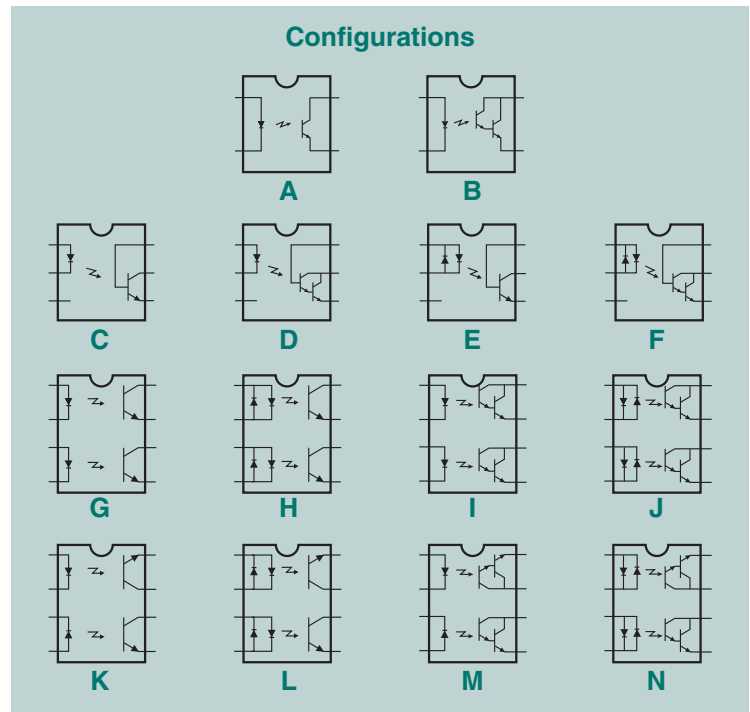


10




12




14




20



22



42



43

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

## Linear Optocouplers

OptoMOS Linear Optocouplers feature an infrared LED optically coupled to a pair of photodiodes. One feedback (input) photodiode is used to generate a feedback signal that provides a servomechanism to the LED drive current thus compensating for the LED's nonlinear time and temperature characteristics. The output photodiode provides an isolated output signal that is linear with respect to the servo LED current.



### Features:

- Couples Analog & Digital Signals
- 3750V<sub>rms</sub> Input / Output Isolation
- Wide Bandwidth (>200kHz)
- High Gain Stability
- Low Input / Output Capacitance
- Low Power Consumption
- 0.01% Servo Linearity
- THD 87dB Typical
- VDE Compatible
- Machine Insertable, Wave Solderable

### Applications:

- Modem Transformer Replacement with No Insertion Loss
- Digital Telephone Isolation
- Power Supply Feedback Voltage / Current
- Medical Sensor Interfacing
- Isolation of Process Control Transducers

Part Number	Servo Gain K1 (Min / Max)	Forward Gain K2 (Min / Max)	Transfer Gain K3 (Min / Max)	Input Control Current (mA)	Isolation Voltage (V <sub>rms</sub> )	Package Type
LOC110	0.004 / 0.03	0.004 / 0.03	0.668 / 1.179	2 - 10	3750	20, 21, 22
LOC111	0.008 / 0.03	0.006 / 0.03	0.733 / 1.072	2 - 10	3750	20, 21, 22
LOC112	0.004 / 0.03	0.004 / 0.03	0.733 / 1.072	2 - 10	3750	20, 21, 22
LOC117	0.008 / 0.03	0.006 / 0.03	0.887 / 1.072	2 - 10	3750	20, 21, 22
LOC210	0.004 / 0.03	0.004 / 0.03	0.733 / 1.072	2 - 10	3750	4
LOC211	0.008 / 0.03	0.006 / 0.03	0.733 / 1.072	2 - 10	3750	4

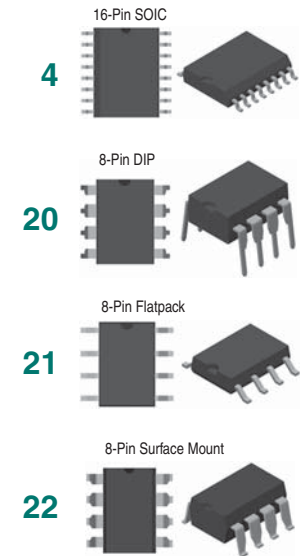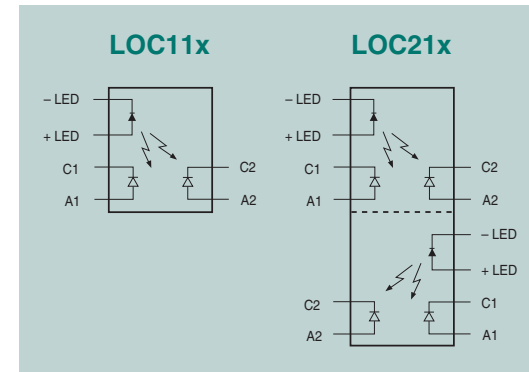

## Optically Isolated Error Amplifiers

Optically Isolated Linear Error Amplifiers combine our optical technology with an industry standard 431-type precision programmable shunt regulator to provide linear isolated feedback for power supply designs. The LIA120 features matched photodiodes for linear high-gain response with excellent temperature stability for a total gain error of less than 2dB.


These devices are well suited for isolated high-gain feedback amplifiers that require excellent linearity and low temperature variation such as power supply feedback stages, modem and audio transformer replacements, industrial control signals, and sensor feedback.

### Features:


- 70dB Linearity Typical
- Optocoupler, Precision Reference, and Error Amplifier in a Single Package
- Low Voltage Operation: 2.7V

### Application:

- Power Supply Feedback

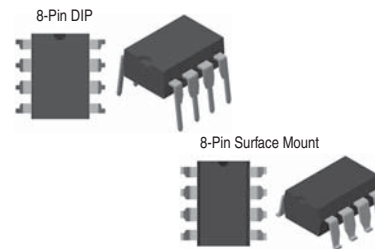

Part Number	Reference Voltage (V)	V <sub>REF</sub> Tolerance (%)	CTR K1 (%)	CTR K2 (%)	CTR Matching K3 (%)	Linearity (dB)	Isolation Voltage (V <sub>rms</sub> )	Package Type
LIA120	1.24V	1	1 - 3	1 - 3	85 - 115	70	3750	8-Pin Surface Mount
LIA130	1.24V	1	-	-	-	-	3750	8-Pin DIP, 8-Pin Surface Mount

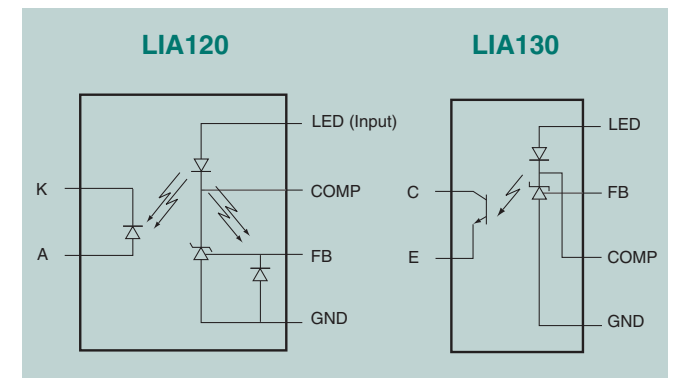

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)





## CPC9909 High Efficiency, High Brightness Off-Line LED Driver

The CPC9909 is a low-cost, high-efficiency, off-line, high-brightness (HB) LED driver manufactured using our high voltage BCDMOS on SOI process. It has an internal regulator that allows it to operate from  $8V_{DC}$  to  $550V_{DC}$ . This wide input operating voltage range enables the driver to be used in a broad range of HB LED applications.

### Features:

- 8V to 550V Input Voltage Range
- >90% Efficiency
- Stable Operation at >50% Duty Cycle
- Drives Multiple LEDs in Series/Parallel
- Regulated LED Current
- Linear or PWM Brightness Control Inputs
- Resistor-Programmable Minimum Off-Time
- Buck or Boost Configuration
- Available in 8-Pin SOIC and Power SOIC Packages

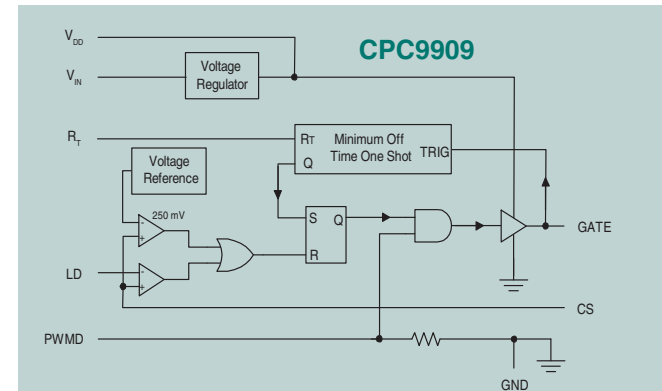
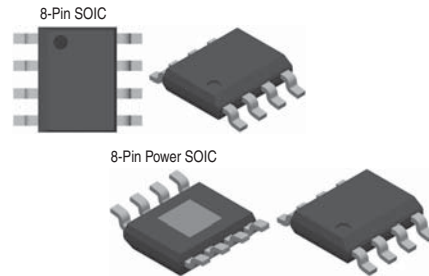


## MXHV9910 High Voltage, Off-Line LED Driver

The MXHV9910 features a fixed-frequency, peak-current control method, which provides an ideal solution for driving multiple LEDs in series and in parallel. Internal circuitry allows it to operate from a universal AC line, or from  $8V_{DC}$  to  $450V_{DC}$ . This highly versatile input operating voltage enables this IC to be used in a broad range of HB LED applications. In addition, LED dimming can be implemented by applying a small DC voltage to the LD pin, or by applying a low-frequency digital PWM signal to the PWMD pin. Applications include flat-panel display RGB backlighting, signage, decorative LED lighting, and DC & AC/DC LED driver applications.

### Features:

- 8V to 450V Input Voltage Range
- >90% Efficiency
- Drives Multiple LEDs in Series/Parallel Combinations
- Regulated LED Drive Current
- Linear or PWM Brightness Control Inputs
- Resistor-Programmable Oscillator Frequency
- Available in 8-Pin SOIC and Power SOIC Packages

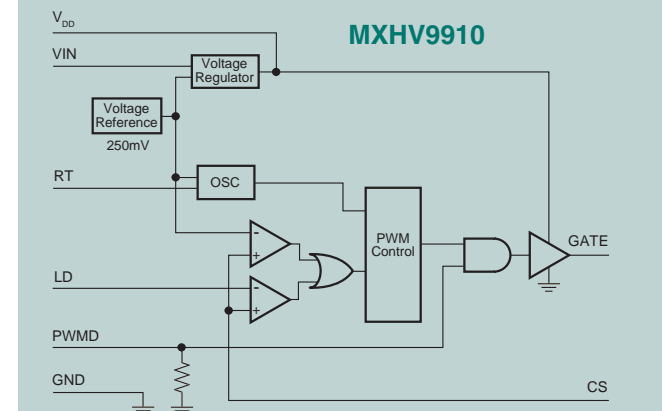
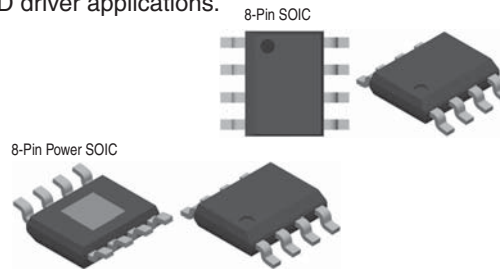


## MXEI2300 300-Output ePaper Gate Driver

MXEI2300 is a 300 bit serial shift register, level translator, and high voltage buffered driver. MXEI2300 is an excellent choice for driving the displays of eBooks and eReaders, mobile phones and other portable hand-held devices, smart cards, and other electronic display devices. MXEI2300 output switching modes are: one pulse, continuous two pulse, jumping two pulse, or no pulse pattern. MXEI2300 can be cascaded up to a maximum of four devices. MXEI2300 is available as gold bumped die in wafer form or wafer pack.

### Features:

- CMOS Technology
- Drives Segment or Active Matrix Displays
- 16V to 47V Output Drive ( $V_{DD}$  to  $V_{EE}$ )
- Selectable Output Shift Direction and Polarity

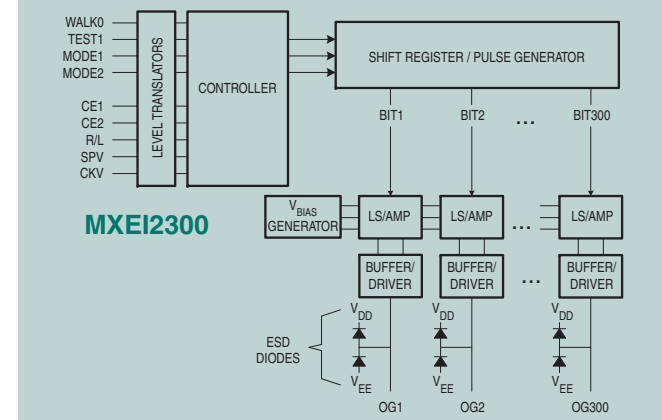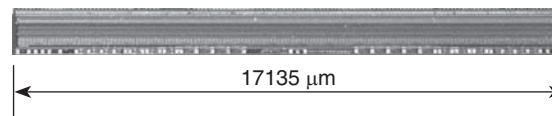


For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

## MXEI2240 240-Output ePaper Gate Driver

MXEI2240 is a 240 bit serial shift register, level translator, and high voltage buffered driver. MXEI2240 is an excellent choice for driving the displays of eBooks and eReaders, mobile phones and other portable hand-held devices, smart cards, and other electronic display devices. MXEI2240 output switching modes are: one pulse, continuous two pulse, jumping two pulse, or no pulse pattern. MXEI2240 can be cascaded up to a maximum of four devices. MXEI2240 is available as gold bumped die in wafer form or waffle pack.

### Features:

- CMOS Technology
- Drives Segment or Active Matrix Displays
- 16V to 57V Output Drive ( $V_{DD}$  to  $V_{EE}$ )
- Selectable Output Shift Direction and Polarity

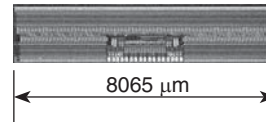

## MXEI1480 ±15V ePaper Source Driver

The MXEI1480 is a selectable 400 or 480 bit long, 2-bit wide, serial-input, parallel-output digital shift register with level conversion on each parallel output, which convert the 2 digital bits into  $V_{POS}$ ,  $V_{SS}$ , or  $V_{NEG}$  analog output voltages. An 8-bit input bus simultaneously inputs 4 groups of 2 bits each. MXEI1480 is available as gold-bumped die in waffle pack and gold-bumped die in wafer form.

### Features:


- CMOS Technology
- ±15V Output Driver Supply Voltage
- Drives Segment or Active Matrix Displays
- 4-Level Gray Scale
- 25MHz Clock Frequency
- Bidirectional Data Transfer
- Selectable Register Length
- 2.7V to 5.5V Logic Supply Voltage
- Cascadable

## MX860 ±15V ePaper Source Driver

The MX860 is a selectable 240, 256, or 268 bit long 2-bit wide serial-input, parallel-output digital shift register with level conversion on each parallel output, which convert the 2 digital bits into  $V_{POS}$ ,  $V_{SS}$ , or  $V_{NEG}$  analog output voltages. An 8-bit input bus simultaneously inputs 4 groups of 2 bits each. MX860 is available as gold-bumped die in waffle pack and gold-bumped die in wafer form.

### Features:

- CMOS Technology
- ±15V Output Driver Supply Voltage
- Drives Segment or Active Matrix Displays
- 4-Level Gray Scale
- 25MHz Clock Frequency
- Bidirectional Data Transfer
- Selectable Register Length
- 2.7V to 5.5V Logic Supply Voltage
- Cascadable

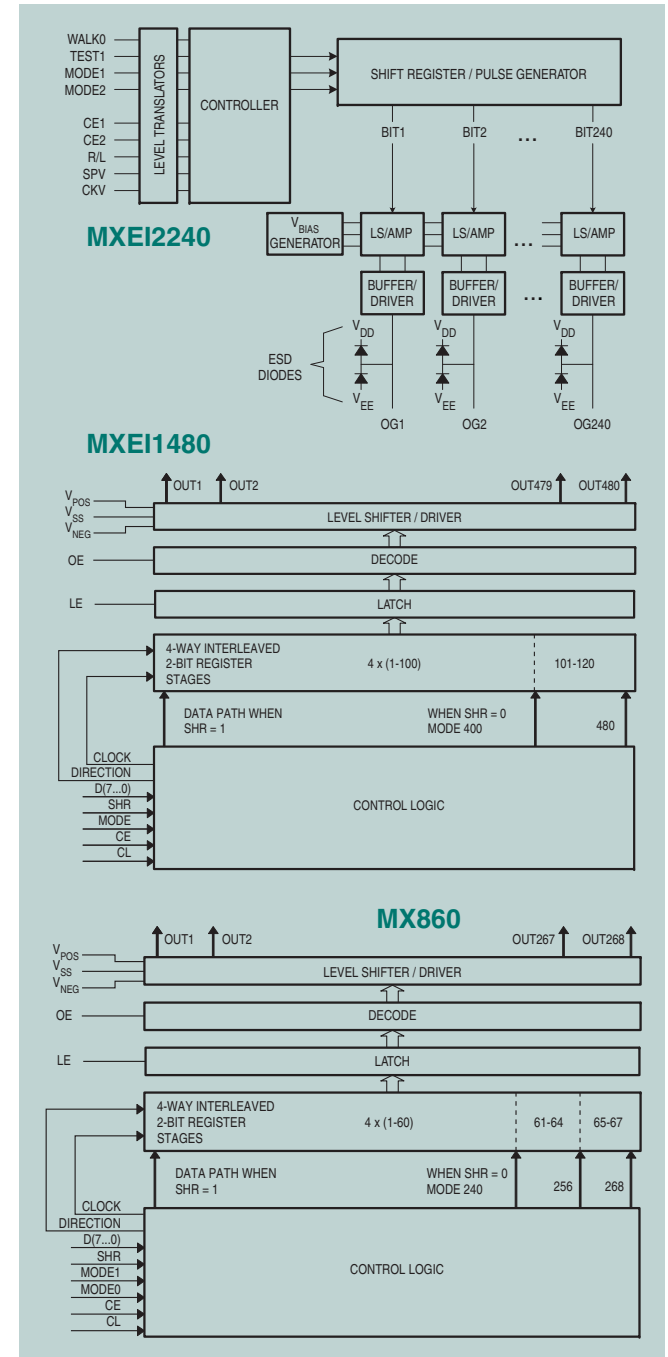

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

## Line Card Access Switches - LCAS

The LCAS product family consists of monolithic ICs that contain high voltage switches for tip and ring line break, power ringing, line test access, test in access, and ringing generator testing. They provide the necessary functions to replace all 2-Form-C electromechanical relays found on both traditional voice and integrated voice and data (IVD) line cards found in Central Office, Digital Loop Carriers, and Channel Banks. LCAS ICs enable low-power, high-density line cards.

New features include: (1) TTL compatible inputs, (2) Smart logic for safe power up and hot plug state control, and (3) Increased dV/dt immunity.



### Features:

- Small Surface Mount SOIC or DFN Packages
- Monolithic IC Reliability
- Low, Matched On-Resistance
- Built-in Zero-Cross Switching
- Impulse Noise Reduction
- Current Limiting, Thermal Shutdown, and SLIC Protection
- Robust Power Cross and Lightning Surge Performance
- Ultra-Low Power Consumption of <10.5mW

### Applications:

- VoIP Gateways
- Central Offices (CO)
- Digital Loop Carriers (DLC)
- Digitally Added Main Line (DAML)
- Hybrid Fiber Coax (HFC)
- Fiber in the Loop (FITL)
- Pair Gain Systems
- Channel Banks
- PBX Systems

**Switch 1500V/μs!**  
**CPC769x Family**  
 dV/dt Immunity

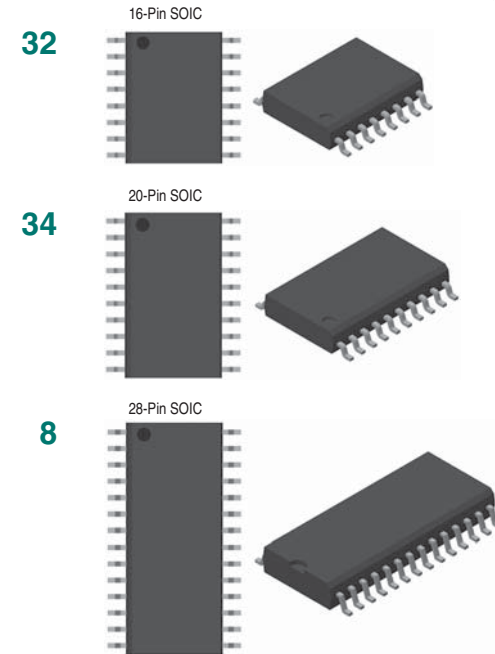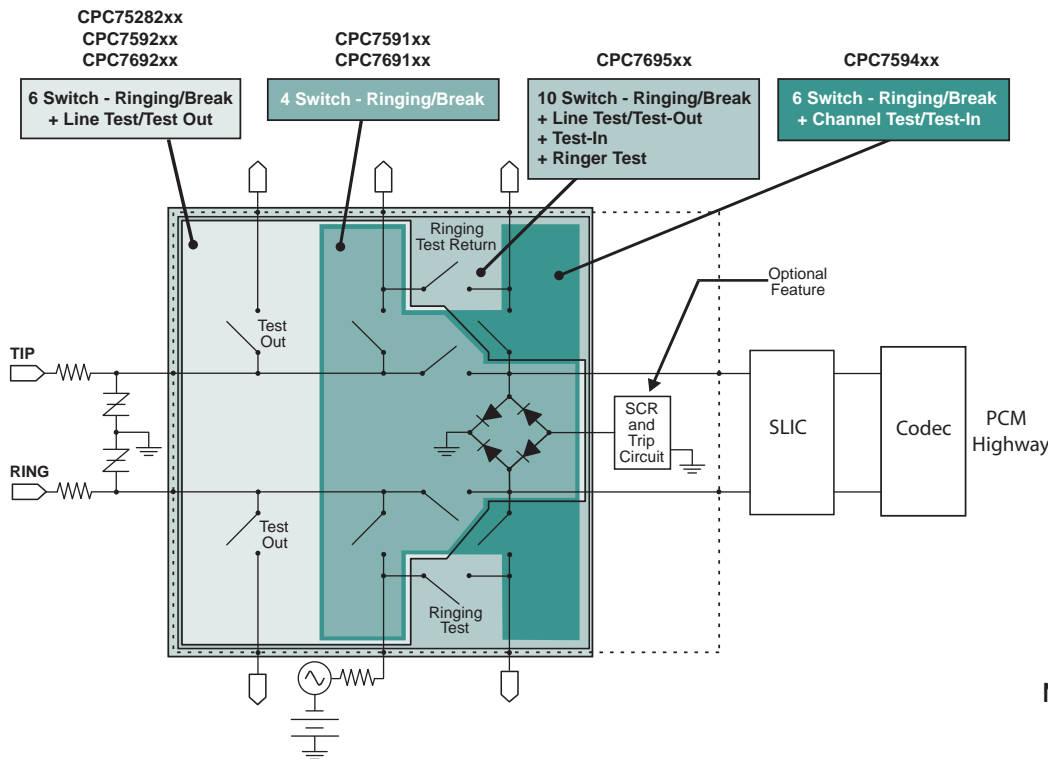

Note: Packages refer to devices in the table on the next page.

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

Part Number	Minimum 1500V/ $\mu$ s dV/dt	Switch Pairs						Zero-Cross Switching	Protection Features				Logic States	Package Type
		# Switches	Break	Ringing	Test Out	Test In	Ringing Test		Current Limit	Diode Bridge	Protection SCR	Minimum Hold Current (mA)		
CPC7691BA	•	4	•	•				•	•	•	•	110	3	32
CPC7691BB	•	4	•	•				•	•	•	•	110	3	32
<b>NEW!</b> CPC7692BA	•	6	•	•	•			•	•	•	•	110	4	32
<b>NEW!</b> CPC7692BC	•	6	•	•	•			•	•	•	•	110	5	32
CPC7695xA	•	10	•	•	•	•	•	•	•	•	•	110	7	8, 34
CPC7695xB	•	10	•	•	•	•	•	•	•	•	•	110	7	8, 34
CPC7695xC	•	10	•	•	•	•	•	•	•	•	•	110	8	8, 34
CPC7591BA		4	•	•				•	•	•	•	110	3	32
CPC7591BB		4	•	•				•	•	•	•	110	3	32
CPC7592BC		6	•	•	•			•	•	•	•	110	5	32
CPC7594xA		6	•	•		•		•	•	•	•	110	4	32
CPC7594xB		6	•	•		•		•	•	•	•	110	4	32
CPC7594xC		6	•	•		•		•	•	•	•	110	4	32

### Dual LCAS: 6-Pole CPC75282

The CPC75282 Dual Line Card Access Switch (LCAS), a member of our next generation Line Card Access Switch family, is a monolithic solid state device that provides the switching functionality of four 2-Form-C relays in a single, small, economical package.


The CPC75282 Dual LCAS device is designed to provide ringing and test access to the telephone loop in Central Office, Digitally Added Main Line, Private Branch Exchange, Digital Loop Carrier, and Hybrid Fiber Coax/Fiber-In-The-Loop analog line card applications. Test access switches provide access to the telephone loop for line (drop) test or message waiting in the PBX application. Available in a 44-pin TQFP package.

**Features:**

- Improved Switch dV/dt Immunity of 1500V/ $\mu$ s
- Smart Logic for Power-Up/Hot-Plug State Control
- Low, Matched  $R_{ON}$
- Eliminates the Need for Zero-Cross Switching
- Flexible Switch Timing to Transition from Ringing Mode to Talk Mode
- Tertiary Protection Consisting of Integrated Current Limiting, Voltage Clamping, and Thermal Shutdown for SLIC Protection
- 5V Operation with Very Low Power Consumption
- Intelligent Battery Monitor
- Latched Logic-Level Inputs, No External Drive Circuitry Required

**Applications:**

- VoIP Gateways
- Central Office (CO)
- Digital Loop Carrier (DLC)
- PBX Systems
- Digitally Added Main Line (DAML)
- Hybrid Fiber Coax (HFC)
- Fiber In The Loop (FITL)
- Pair Gain System
- Channel Banks

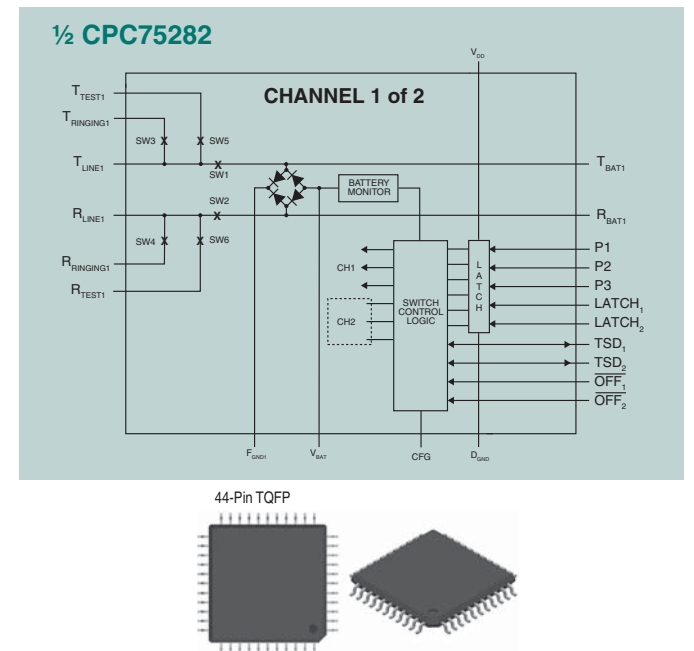

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

## LCAS for Ringing SLIC: CPC7508



The CPC7508 is a member of our next generation Line Card Access Switch family. Used with ringing SLICs, it provides the necessary functions to replace the two 2-Form-C electromechanical test relays used in contemporary Fiber To The Home (FTTH) and Optical Network Unit (ONU) deployments as well as Voice over IP (VoIP) telephony terminals. Solid state switches provide the mechanism for tip and ring line break, drop test, and channel test while requiring only a single +12V supply for operation. Interface compatibility with 3.3V or 5V logic for switch state control is provided by the TTL logic-level inputs. The CPC7508 is designed for fiber access units where EMR's are used for test access and line monitoring functions but solid-state switches are desired due to reduced operating noise, lower power consumption and longer lifetimes. Available in a 16-pin SOIC package.

### Features:

- TTL Logic-Level Inputs for 3.3V Logic Interfaces
- Smart Logic for Power-Up / Hot Plug State Control
- Monolithic IC Reliability
- Low, Matched  $R_{ON}$
- Clean, Bounce-Free Switching
- Tertiary Protection Consisting of Integrated Current Limiting and Thermal Shutdown for SLIC Protection

### Applications:

- Fiber to the Home (FTTH)
- Fiber in the Loop (FITL)
- VoIP Gateways
- PBX Systems
- Digitally Added Main Line (DAML)
- Hybrid Fiber Coax (HFC)

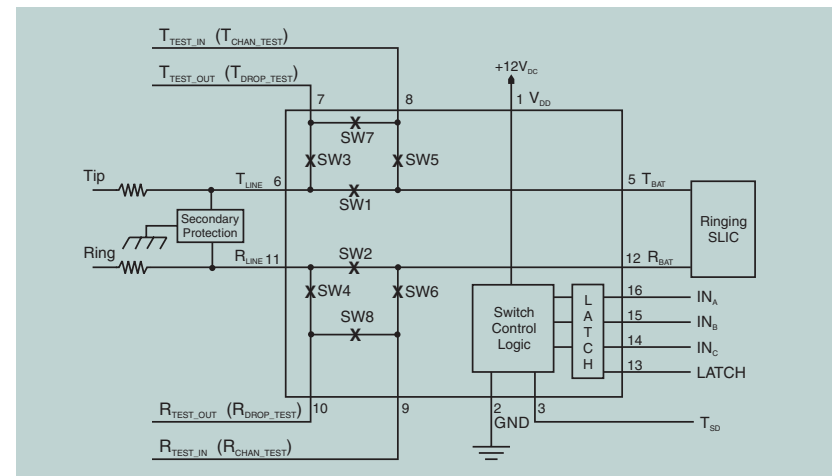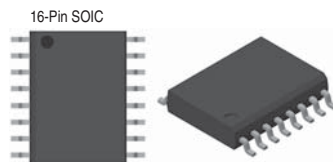

## Quad High Voltage Isolated Analog Switch Array: CPC7514


The CPC7514 Quad High Voltage (HV) isolated Analog Switch Array builds upon our Line Card Access Switch (LCAS) design and fabrication expertise for telecom and non-telecom applications. This monolithic solid state device provides the switching functionality of four normally open (1-Form-A) relays in one small economical package. Designed to provide flexible single-ended or differential access to high voltage networks, the CPC7514 High Voltage Array (HVA) is configured as two sets of matched, paired switches for improved differential performance. Additionally, sensitive differential applications will benefit from the matched pairs excellent pair-to-pair isolation. The self-biasing switches do not require external high voltage supplies for proper operation. Independent switch current limiting and switch-pair thermal shutdown features provide enhanced protection for devices connected to high voltage networks up to +320V.

### Features:


- Low, Matched  $R_{ON}$
- Switch Voltage up to 320V
- 320V Logic Input to Switch Output Isolation
- 110dB Switch-to-Switch Isolation at 5kHz
- Flexible Switch Configurations
- Smart Logic for Power-Up / Hot-Plug State Control
- 3.3V Operation with Very Low Power Consumption
- Switch Current Limiting Protects Against Fault Conditions
- Thermal Shutdown Protects Against Fault Conditions
- Latched TTL Logic-Level Inputs
- Clean, Bounce-Free Switching
- Monolithic IC Reliability

### Applications:

- Instrumentation
- Industrial Controls and Monitoring
- Automatic Test Equipment (ATE)
- Battery Charging Circuits
- Telephony
- VoIP Gateways
- Central Office (CO) and Remote Terminal (RT)
- Concentrators
- PBX Systems
- Optical Network Terminals (ONT) and Optical Network Units (ONU)
- Hybrid Fiber Coax (HFC)

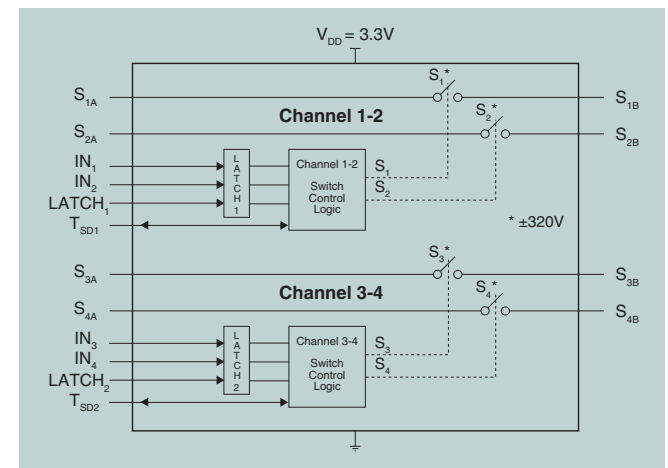

**3.3V Supply!**

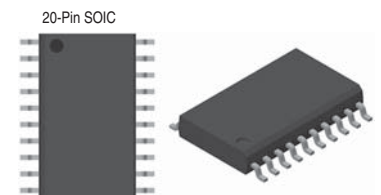

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

# LITELINK™ Silicon DAA, Phone Line Interface

The LITELINK phone line interface is the industry's only single package silicon Data Access Arrangement, featuring a 32-pin, small outline, low profile, surface mount package. It is ideal for both voice and data (V.22bis to V.90/V.92) and applications in particularly dense circuit environments. The internal optical isolation barrier eliminates high-cost transformer or capacitive isolation circuits. This solution saves cost relative to competitive circuits through reduced passive component count and smaller printed circuit board space.

The 3kV<sub>rms</sub> internal isolation barrier exceeds all worldwide regulatory requirements. In addition, the LITELINK application circuit is capable of surviving 6kV (10μsec x 700μsec) lightning surge waveforms making it the most robust silicon DAA on the market.

LITELINK offers the lowest operational phone line quiescent current. The device easily interfaces to commonly available standard single-ended or differential voice and modem codecs on the market. Contact IXYS Integrated Circuits Division for information on codec reference designs that offer programmable AC termination impedance for global applications. LITELINK complies with international PSTN agency requirements.


The newest device is the CPC5622 that offers continuous Caller-ID (CID) signal monitoring, which is ideal for telephony applications in countries where CID information is present before the ringing signal. The CPC5622 also offers both full-wave and half-wave ringing signal detection, enabling the designer to choose the appropriate interface to the codec/DSP block.

### Features:


- Voice and Data Applications
- Modem DAA for Speeds up to V.92
- Half-Wave or Full-Wave Ringing Detection
- Worldwide Telephone Network Compatibility
- Caller-ID Reception
- Line Side Powered from Telephone Line
- 3.3V to 5V Power Supply
- Easy Interface with Modem ICs and Voice Codecs
- High Power Transmit Option for Voice Applications (>3dBm)
- Small 32-Pin SOIC Package

### Applications:

- Computer Telephony
- VoIP Gateways
- PBXs
- Satellite Set-Top Box
- V.92 Modems
- Fax Machines
- Voice Mail Systems
- Embedded Modems
- Vending Machines
- Automated Banking
- Remote Metering
- Surveillance
- Security Systems

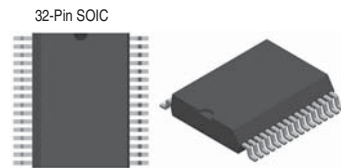

Part Number	Isolation Voltage (V <sub>rms</sub> )	Power Supply (V)	Caller ID	Ringing Detect
CPC5622	3000	3.3 - 5	Continuous	Half-Wave & Full-Wave
CPC5621	3000	3.3 - 5	Selectable	Full-Wave
CPC5620	3000	3.3 - 5	Selectable	Half-Wave
CPC5601	Optional Optically Isolated Auxiliary Programmable Driver IC: Enables Host Equipment Control For LITELINK Silicon DAA Devices			
CPC5608	Low-Power Transistor Array (see page 41)			

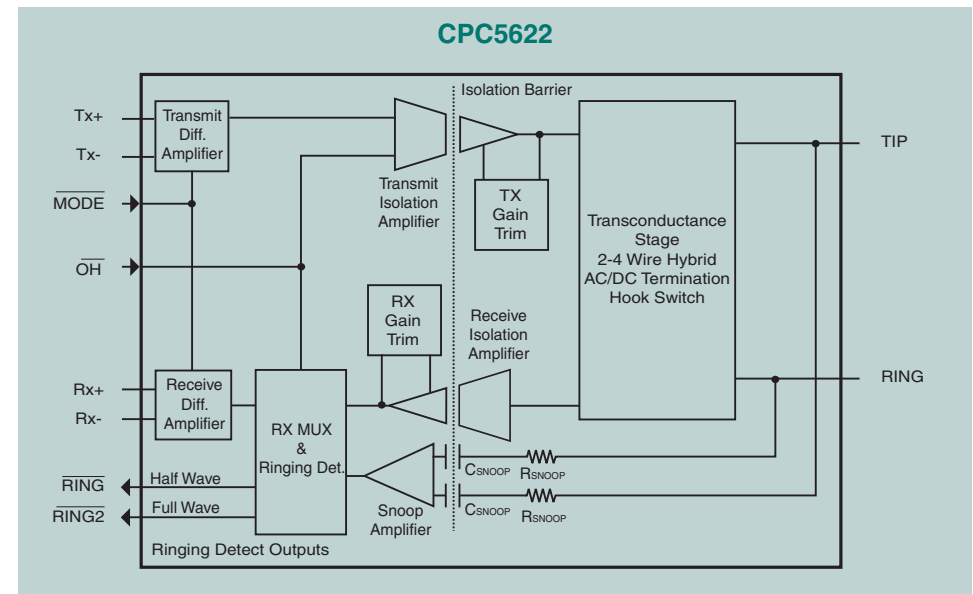

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

## Voltage Monitor Devices


The CPC5712 is a special-purpose “Voltage Monitor with Detectors” integrated circuit that is used in various high voltage telephony applications such as VoIP gateways and IP-PBXs, as well as non-telephony applications in instrumentation and industrial control. The device monitors the TIP/RING potential through a high-impedance divider (resistor isolation) to derive two resistor-programmable signal level detects, polarity information, and a scaled, linear representation of the phone line voltages.

CPC5710N is a versatile building block for designing telephone line monitoring circuits. The device has two outputs: a scaled, linear representation of the input TIP/RING voltage, and a switchable, internally set comparator output. The comparator output provides a ringing detect signal, the level of which is set by the resistor values selected for the input network. A formula for selecting these input resistors is given in the CPC5710 Data Sheet that is available at our web site. The Data Sheet also includes an application circuit that derives Line-in-Use (LIU) and line polarity information from the scaled output signal. This high-impedance, resistive-barrier application circuit is fully compliant to the EN60950 safety standard, and meets the ITU-T K.21 over-voltage and over-current specifications (with appropriate PCB layout).

In use, the resistor divider and the high input impedance of both the CPC5710 and the CPC5712 make the circuits practically undetectable on the line.


### CPC5712 Features:

- Two Independent, Programmable Level Detectors with Programmable Hysteresis
- Fixed-Level Polarity Detector with Hysteresis
- Differential Linear Output
- Excellent Common-Mode Rejection Ratio (CMRR)
- 16-Pin SOP Package
- Worldwide Telephone Network Compatibility
- Minimum External Components
- High Differential Input Impedance, Very Low Common-Mode Input Impedance
- Fixed Gain
- 3V to 5.5V Operation
- Low Power Consumption
- CMOS Logic-Level Output (TTL Compatible)

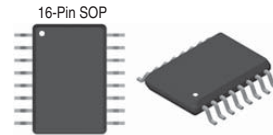


### CPC5712 Applications:

- VoIP Gateways, IP-PBX, xDSL
- TIP/RING Monitoring: Polarity Detection for Caller ID, Enhanced 911, Line-in-Use, Battery Detection, PSTN Check
- Non-Telephony Voltage Level Detection Applications: Instrumentation and Industrial Control

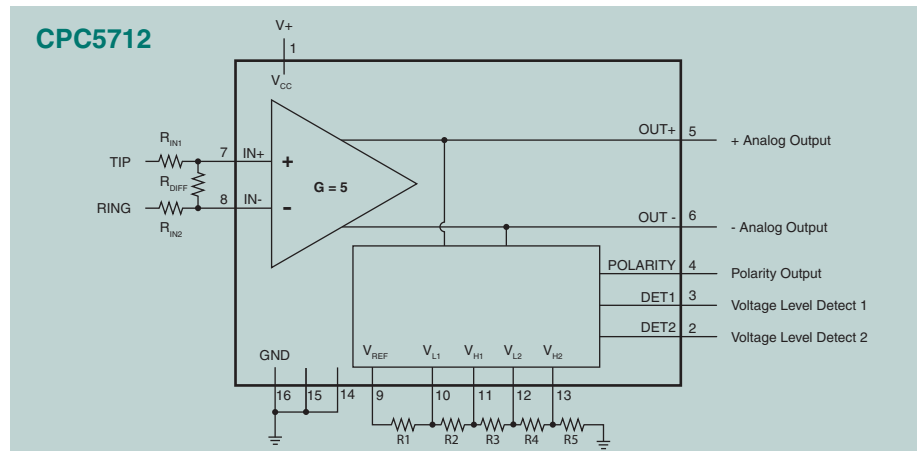


### CPC5710 Features:

- Differential or Single-Ended Linear Output
- Full-Wave Ringing Level Detector Comparator with Internal Threshold, Large Hysteresis, and TTL Logic-Level Output
- High Common-Mode Rejection Ratio (CMRR)
- 8-Pin SOIC Package
- Worldwide Telephone Network Compatibility
- High Differential Input Impedance, Very Low Common-Mode Input Impedance
- Fixed Gain
- 3V to 5.5V Operation
- CMOS Logic-Level Output (TTL Compatible)

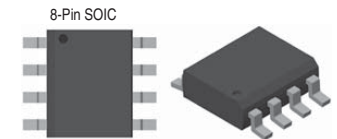

### CPC5710 Applications:

- Display Feature (Caller ID) Signal Buffering
- Line-in-Use Detection (Another Phone-Off-Hook)
- Ringing Signal Detection
- Battery Presence Monitoring
- TIP/RING Voltage Monitoring
- Line Polarity

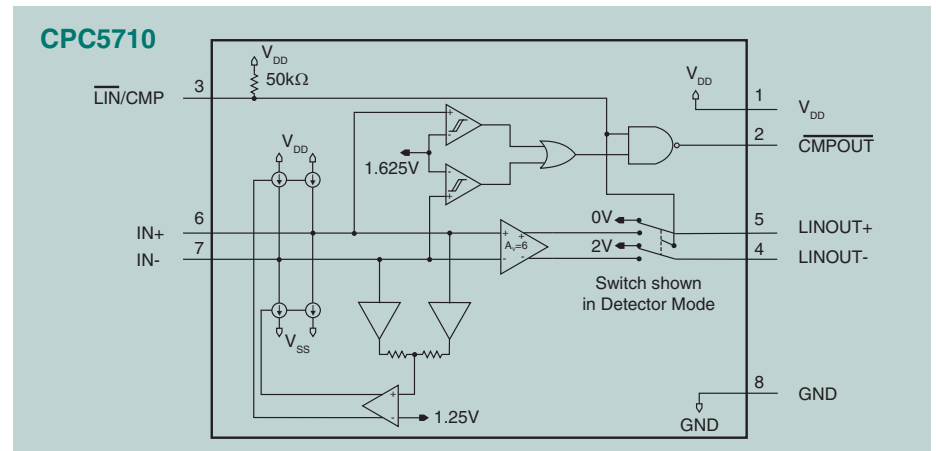

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

## DC Termination IC: CPC1465 SHDSL/ISDN



The CPC1465 provides a polarity-insensitive DC termination for wetting (sealing) current on the CPE side conforming to ITU-T G.991.2 to eliminate corrosion on G.SHDSL/ISDN lines. The CPC1465 has excellent linearity (70dB typ.) to minimize harmonic distortion, and well-controlled turn-on and turn-off characteristics to minimize injecting impulse noise with in-band signal energy into the G.SHDSL channel. This DC termination IC, which interfaces with the tip/ring pair, is rated at 300V, and is able to handle power cross and lightning transients with appropriate protection. Manufactured in our proven 320V Silicon-On-Insulator (SOI) process, the CPC1465 is packaged as a 16-pin SOIC or as a 16-pin DFN.

### Features:

- Meets Wetting (Sealing) Current Requirements Per ITU-T G.991.2
- Integrated Bridge Rectifier for Polarity Correction
- Uses Inexpensive Optocoupler for DC Signaling
- Electronic Inductor, Breakover, and Latch Circuits
- Current Limiting and Excess Power Protection Circuits
- ANSI SHDSL and ISDN Compatible
- MLT and SARTS Compatible
- Excellent Linearity (70dB typ.)



### Applications:

- G.SHDSL
- ISDN
- Router and Bridge Customer Premises Equipment
- Leased Line Equipment
- T1/E1 Network Line Cards and Repeaters
- Network Termination 1 (NT1) Equipment
- Mechanized Loop Test (MLT) Networks
- Switched Access Remote Test System (SARTS) Networks

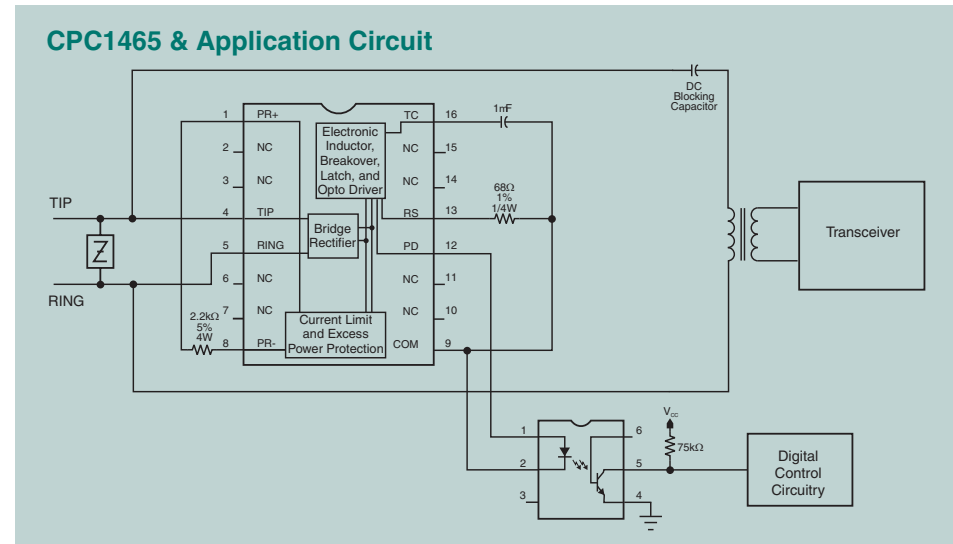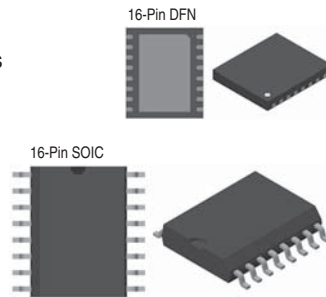

## DC Termination IC: CPC1466 Broadband ADSL/VDSL

The CPC1466 is a DC Termination IC for broadband ADSL/VDSL applications. The high voltage, monolithic device provides a path for DC wetting (sealing) current in customer premises equipment (CPE) to eliminate phone line corrosion on DSL twisted-pair copper lines without telephone voice services (i.e. broadband-only services).

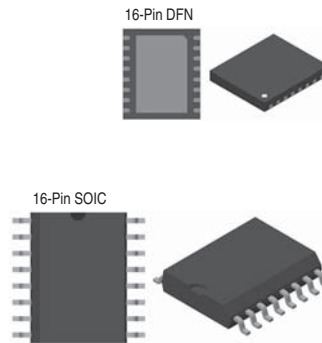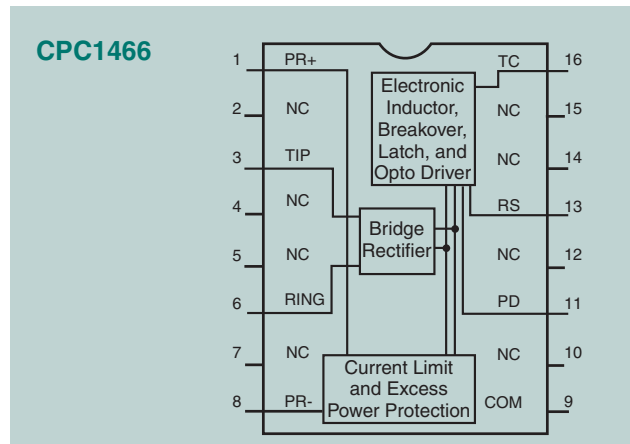

### Features:

- Meets Wetting (Sealing) Current Requirements Per ITU-T G.992.3
- Integrated Bridge Rectifier for Polarity Correction
- Uses Inexpensive Optocoupler for DC Sealing Current Monitoring
- Electronic Inductor, Breakover, and Latch Circuits
- Current Limiting and Excess Power Protection Circuits
- ADSL/VDSL Compatible with Low-Pass Filter Network
- MLT and SARTS Compatible
- Compatible with Portable Test Sets
- Small 16-Pin SOIC and 16-Pin DFN Packages

### Applications:

- ADSL/VDSL Broadband Modems
- Router and Bridge Customer Premises Equipment
- Leased Line Equipment
- Mechanized Loop Test (MLT) Networks
- Switched Access Remote Test Systems (SARTS) Networks

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)





The OptoMOS line of Multifunction Products combines optically isolated discrete component functions into a single package. These products mix and match solid state relays, optocouplers, bridge rectifiers, Darlington transistors, and Zener diodes to create highly functional circuits in a single, small package. Multifunction devices allow designers to consolidate circuit functions into a single device, freeing up valuable board space and reducing component count. Designed specifically for the telecommunications industry, the Integrated Telecom Circuit (ITC) series is well suited for voice telephony and modem applications, providing most of the major functions required when designing DAA (Data Access Arrangement) or voice (FXO) line interface circuits. Available in a 16-pin SOIC package.

### Features:

- 3750V<sub>rms</sub> Input to Output Isolation
- Multiple Functionality in a Single Package
- Current Limiting (Part Numbers with “L” Suffix)
- Machine Insertable, Wave Solderable
- TTL and CMOS Compatible

### Applications:

- Telecommunication / Datacommunication
- Instrumentation
- I/O Subsystems
- Electronic Switching
- Medical Equipment (Patient / Equipment Isolation)
- Security
- Aerospace
- Industrial Controls

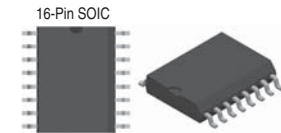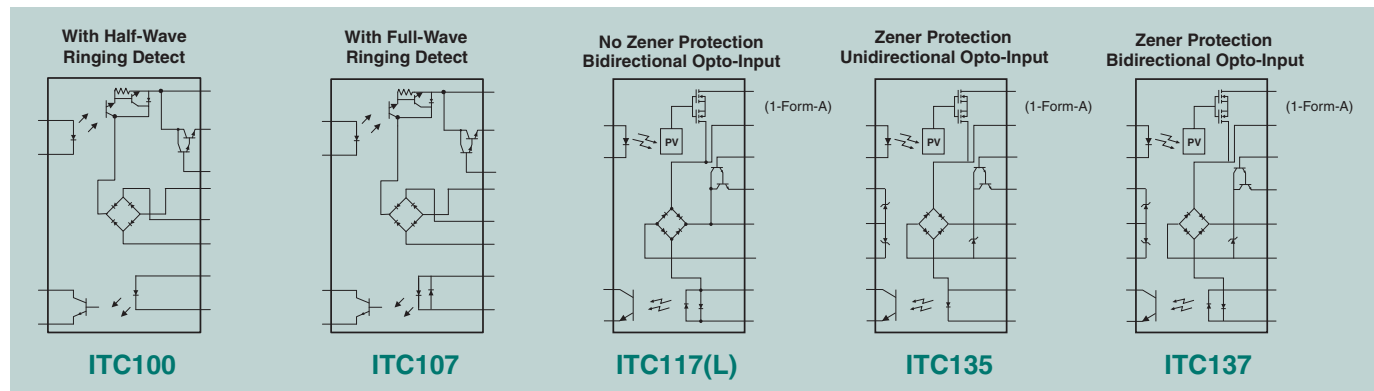

Part Number	Relay Parameters				Optocoupler Parameters				Isolation Voltage (V <sub>rms</sub> )	Package Type	Features
	Blocking Voltage (V <sub>p</sub> )	Load Current (mA)	On Resistance (Ω)	Input Control Current (mA)	Breakdown Voltage (V)	Current Transfer Ratio (%)	Saturation Voltage (V)	Input Control Current (mA)			
ITC117	350	120	15	5	20	33	0.5	6	3750	16-Pin SOIC	Full-Wave Ringing Detect
ITC117L	350	120	20	5	20	33	0.5	6	3750	16-Pin SOIC	Full-Wave Ringing Detect, Current Limiting
ITC135	350	120	15	5	20	33	0.5	6	3750	16-Pin SOIC	Half-Wave Ringing Detect
ITC137	350	120	15	5	20	33	0.5	6	3750	16-Pin SOIC	Full-Wave Ringing Detect

Part Number	Photo-Darlington Parameters			Bridge Parameters		Optocoupler Parameters				Isolation Voltage (V <sub>rms</sub> )	Package Type	Features
	Blocking Voltage (V <sub>p</sub> )	Saturation Voltage (V)	Input Control Current (mA)	Reverse Voltage (V)	Forward Voltage (V)	Breakdown Voltage (V)	Current Transfer Ratio (%)	Saturation Voltage (V)	Input Control Current (mA)			
ITC100	350	1.2	5	350	1.1	20	33	0.5	6	3750	16-Pin SOIC	Half-Wave Ringing Detect
ITC107	350	1.2	5	350	1.1	20	33	0.5	6	3750	16-Pin SOIC	Full-Wave Ringing Detect

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

## Call Progress Tone Detectors & Generators

These Call Progress devices provide an inexpensive method of detecting and generating common call progress tones including busy tone, dial tone, call waiting tones, and others. The family includes both an inexpensive band detector and a precise tone generator that can produce a preset number of single and dual tones. The detector is available in both DIP and SOIC packages, and operates on a 3V to 5V supply. The call progress generator allows for a simple method of providing dial tone, busy tone, and other call progress tones in applications where a POTS interface is required such as VoIP or other network gateways.





### Features:

- Receive or Generate Common Call Progress Tones
- The M-980-02 Operates with a Single 3-5 Volt Supply
- Linear Input (Detector) and Output (Generator)
- Inexpensive Band Detector with Wide Dynamic Range (>38dB)
- Low Power Consumption


### Applications:

- PBX Circuits
- Billing Systems
- Test Equipment
- Point-of-Sale Terminals

### M-980-02: Call Progress Tone Detector

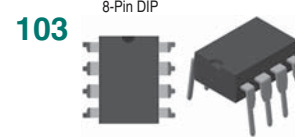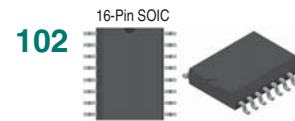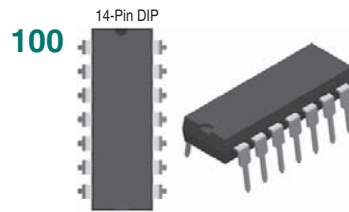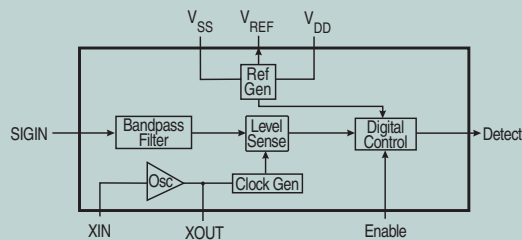

### M-991: Call Progress Tone Generator

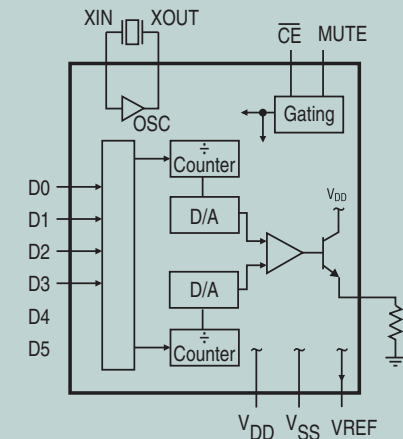



Part Number	Function (315 - 640Hz)	Package Types
M-980-02	Tone Detector	102, 103

Part Number	Function	Generated Frequencies			Package Types
		Dial Tone (440 + 480Hz)	Audible Ringing (480 + 620Hz)	Busy Tone	
M-991	Tone Generator	•	•	•	100, 102

## Line Sense Relay

### M-949-11 Balanced Dual Coil Telephone Line Current Sensing Relay

- Senses Telephone Line Current From 15mA to 200mA
- Used by Control Circuitry for
  - On-Hook/Off-Hook Monitoring
  - Switch Hook Flash Detection
  - Rotary Dial Pulse
- Meets High Isolation Voltage Requirement of 4000V
- Meets UL and British Standard Specifications
- Includes 1-Form-A Relay Contact

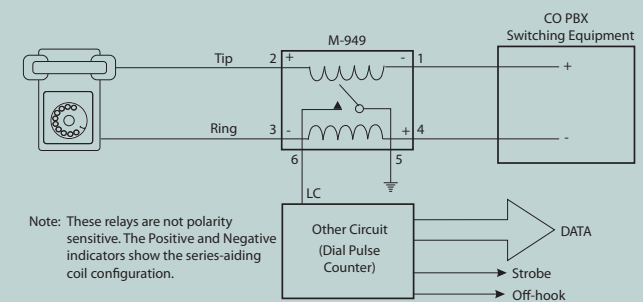

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

## MF Trunk Signaling Devices


Operating with a 20.48 MHz crystal, the M-986 is capable of providing a direct digital interface to an A-law encoded PCM digital input. Each channel can be connected to an analog source using a coder-decoder (codec) as shown in the block diagram. The M-986 can be configured by the customer to operate with the transmitter and receiver either coupled together or independently, enabling it to handle a compelled cycle automatically or via command from the host processor. A-law is used for coding/decoding. The M-986 is configured and controlled through an integral coprocessor port. M-986-2R2 provided in 40-pin DIP and 44-pin PLCC packages.

### Features:


- Direct PCM interface to Chip
- Manual or Compelled Mode Operation for R2 Signaling
- 2.048 MHz Clocking
- Dual Channel
- Microprocessor Read/Write Interface

### Application:

- Trunk Circuits Requiring MF Trunk Signaling in R1 or R2 Signaling Formats

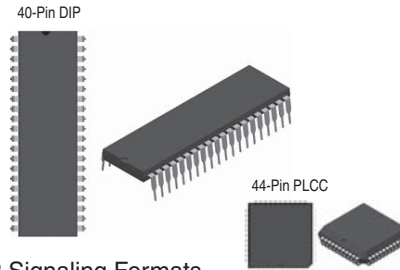

Part Number	Function	CCITT R1	CCITT R2	A-law PCM	μ-law PCM	PCM (In/Out)
M-986-2R2	Transceiver		•	•		•
M-987-2R2K	Transceiver		•	•		•
M-987-2A1K	Transceiver	•		•	•	•

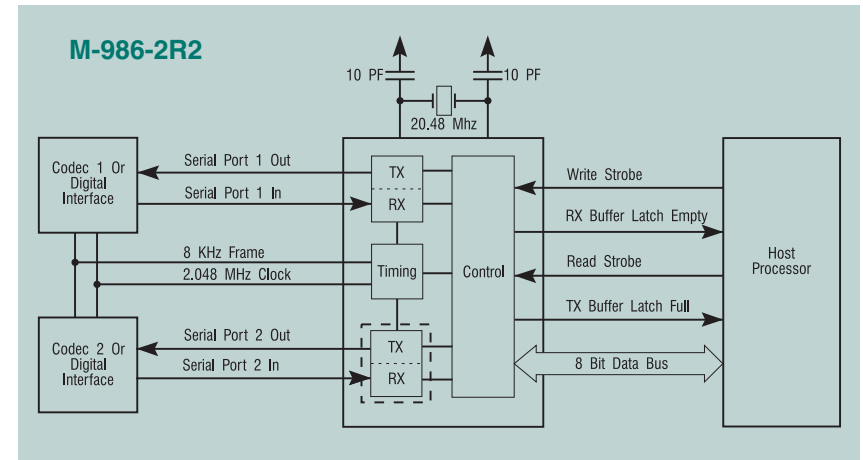

## Embedded Modem Module: CPC2400E



The Embedded Modem Module (EMM) combines a datapump and microcontroller with the Data Access Arrangement (DAA) to deliver an all-in-one solution for V.22bis modem transaction-oriented applications. This plug-and-play module provides a total solution complete with transferable FCC registration. It supports a standard serial V.24 TTL interface to the DTE equipment. The CPC2400E features a quick handshake time of 1.6 seconds. This offers a clear advantage for short connection sessions when compared to V.34 and V.90 modems which have a data handshake period greater than 10 seconds.

### Features:

- Easy Integration and Installation
- Small Footprint of 1.00" x 2.50"
- Low Power Consumption
- 5V Power Supply Operation
- Supports V.22bis, V.22, V.23
- FCC Part 15B Compliant
- FCC Part 68 User Transferable Registration
- UL Approved

### Applications:

- Point-of-Sale (POS)
- Gaming Equipment
- Utility Metering
- Lock Boxes
- Remote Monitoring
- Embedded Applications
- Medical Appliances

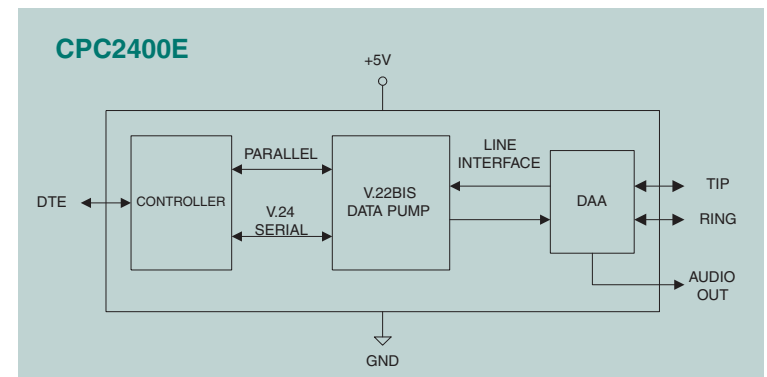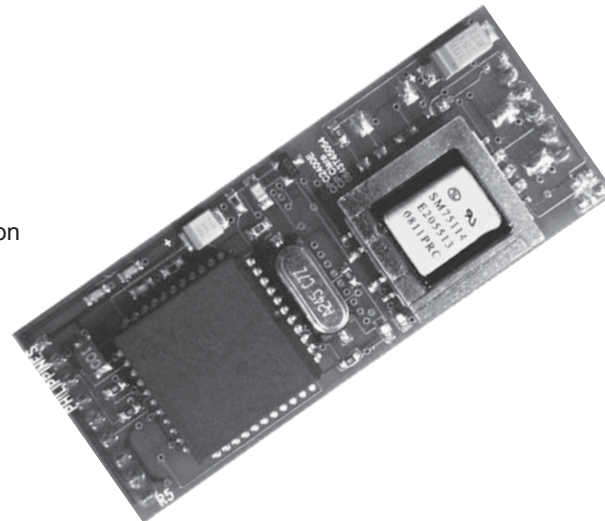

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

## Cybergate™ Data Access Arrangement (DAA) Modules


The Cybergate family is a turnkey modular DAA solution. The V.34 family provides the circuitry required in a single, completely functional DAA circuit in a 1.07" x 1.07" x 0.4" plastic module. This plug-and-play design allows the user to choose the necessary options to minimize costs, and in turn maximize value. Standard features include surge protection, transient protection Zeners, ringing detection, hook switch circuitry, gyrator circuitry (impedance balancing), and a transformer. Caller-ID (CID) and loop current detection are also available as options.

### Features:

- 28.8kbps (Except for CYG2911 at 9.6kbps)
- Optional Caller ID and Loop Current Sense
- Ringing Detection
- Low Power Hook Switch
- Surge Protection
- Gyrator Circuitry
- Meets Most Regulatory Agency Requirements

### Applications:

- Modems
- Remote Data Acquisition
- Fax Machines
- Security / Metering
- Computer Telephony
- PBX
- Voice Mail Systems

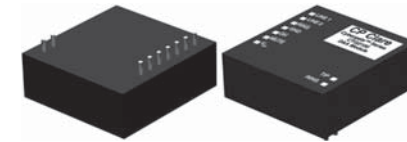

**Small Package Size!**


1.07" x 1.07" x 0.4"

27.18mm x 27.18mm x 10.16mm

Part Number	Region	Hook Switch Resistance (Ω)	DC Loop Current (mA)	Return Loss (Min) (dB)	Insertion Loss (Max) TX - Transmit (dB) RX - Receive (dB)	Ringing Voltage Detection Range (V <sub>rms</sub> )	Isolation Voltage (V <sub>rms</sub> )	FEATURES				
								Ringing Detection Full Wave	Ringing Detection Half Wave	Caller ID	Loop Current Detect	2-4 Wire Conversion
CYG2000	N. America Asia	15	20-120	18	TX 7 RX 7	20-150	1000		•			
CYG2011	N. America Asia	15	20-120	18	TX 7 RX 7	20-150	1000	•			•	
CYG2020	N. America Asia	15	20-120	18	TX 7 RX 7	20-150	1000		•	•		
CYG2100	Europe	35	5-120	14	TX 7 RX 7	29-150	1500		•			
CYG2110	France	35	5-120	14	TX 7 RX 7	29-150	1500		•			
CYG2111	CTR-21	35	5-60	14	TX 7.5 RX 7.5	29-150	1500		•			
CYG2217	N. America Asia	15	20-120	39	TX 7 RX 1	20-150	1000		•			•
CYG2218	N. America Asia	15	20-120	39	TX 1 RX 1	20-150	1000		•			•
CYG2320	Australia	-	5-120	14	TX 7 RX 7	29 MIN	1500		•			

## Low Power Transistor Array: CPC5608

The CPC5608 is a 5-channel, low-power transistor array IC with a simple 2-state logic control input. A logic-low input turns on switches OUT1, OUT2, and OUT3; a logic high turns on switches OUT4 and OUT5. Output transistors are capable of sinking 50mA in low output voltage (<7V) circuits. The IC features a low supply voltage range of 2.5V to 5.5V and no static supply bias current draw making it ideal for portable battery and on-hook telephone applications.

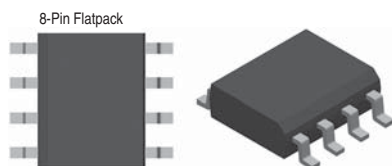


### Features:

- No Static Current Draw from Power Supply (CMOS Control)
- Low-Voltage Operation (V<sub>CC</sub> = 2.5V)
- Low Output Transistor Leakage

### Applications:

- Portable Battery Equipment
- Telephony
- Instrumentation

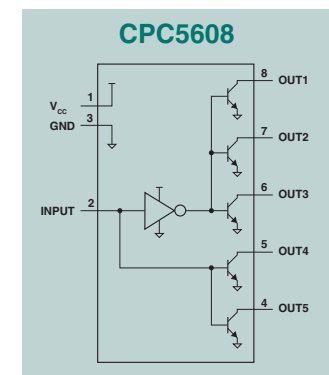

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

# Other Semiconductor Products

## Hall-Effect Switches



The MX887D and MX887P integrated Hall-Effect switches target the requirements of low-power portable devices with battery operating voltages from 2.5V to 5.5V. On-chip power management circuitry reduces the effective average current to just 5µA at 3V supply voltage.

Both devices turn on when either a north or south magnetic pole is applied, and turn off when the magnetic field is removed. The MX887D switches between GND and high-impedance state, while the output of the MX887P switches between the supply voltage and GND.

MX887D and MX887P are ideal reed relay replacements, especially in low-power portable device applications. Available in a TSOT-23 package.

### Applications:

- Handheld Portable Devices
- White Goods
- Automotive - Body Systems
- Security Systems
- High Reliability Reed Switch Replacement

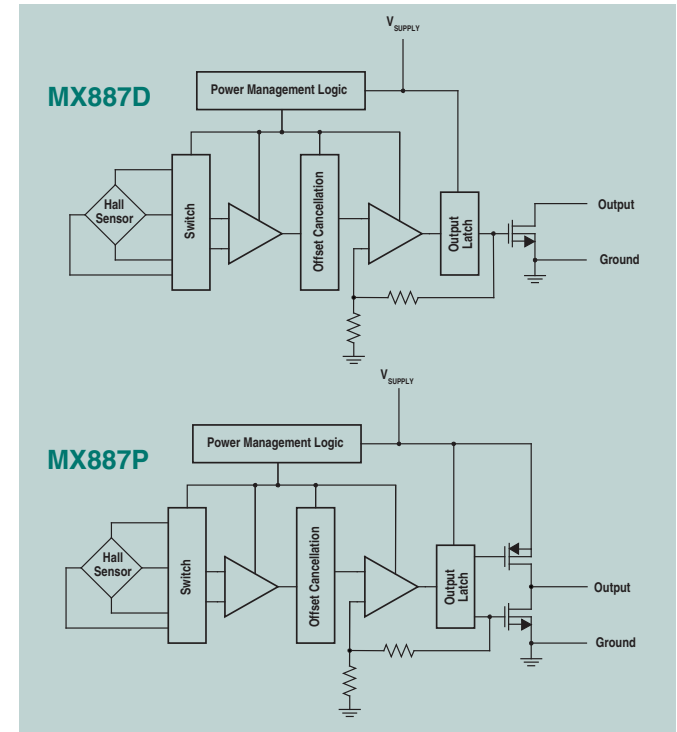


## Solar Cells

Our Solar Cells address the diverse needs of the growing number of micro-power solar applications. The SOI process, which also creates isolation trenches on the die, produces multiple solar cells on a single, monolithic piece of monocrystalline silicon. These isolated solar cells can then be interconnected to give a useful level of voltage from a small, SOIC package that can be easily installed in an automated process. Ideal for use in applications where high current is not needed, but voltages higher than those provided by single solar cells is required.

Part Number	Open-Circuit Voltage (V)	Short-Circuit Current (µA)	Package Type
CPC1822	4	50	8-Pin SOIC
CPC1824	4	100	16 Pin SOIC
CPC1831	8	25	8-Pin SOIC
CPC1832	8	50	16-Pin SOIC

### Features:

- Provides True Wireless Power
- Triggers with Natural Sunlight or Artificial Light
- Semiconductor Miniature Size and Reliability

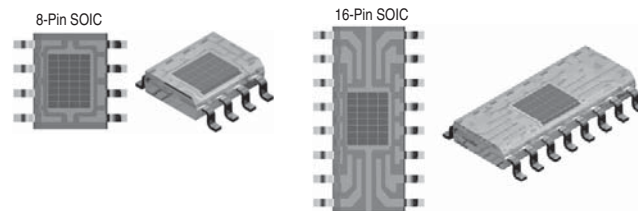

### Applications:

- µ-Power Wireless Sensors
- Solar Tracking
- Portable Electronics
- Solar Battery Chargers
- Battery Operated Equipment
- Consumer Electronics
- Sunlight / Light / Flame Detection

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

The following application notes can be downloaded from our web site at [www.ixysic.com](http://www.ixysic.com)

## General

- AN-131 Handling MOS Devices

## Solid State Relays

- AN-145 Advantages of Solid State Relays Over Electromechanical Relays (English, Espanol, Deutsch, Francais)

## High Voltage LED Drivers

- AN-301 CPC9909 Design Considerations
- AN-300 MXHV9910 Design Considerations

## Gate Drivers

- AN-401 MOSFET / IGBT Drivers Theory and Applications
- AN-400 IX2127 Design Considerations
- AN-202 CPC1590 Application Technical Information
- AN-201 Using the CPC1580 Isolated Gate Driver IC

## Linear Optocouplers

- AN-118 Detecting Line Polarity Reversal
- AN-111 Isolated 0-10V to 4-20mA Converter Application
- AN-109 LOC110 - Variable Speed Motor Controller Design
- AN-107 LOCxx Series - Isolated Amplifier Design Principals

## Multifunction Products for Telecom

- AN-151 FXO/DAA Design Using Clare OptoMOS Components
- AN-114 ITC117P Integrated Telecom Circuit
- AN-112 Ground-Start Supervision Circuit Using Clare's IAA110

## High Speed Digital Opto Isolators

- TB-101 Optically Isolating an I<sup>2</sup>C Interface

## Line Interface Products

- AN-154 Line Card Access Switch (LCAS) Longitudinal Balance Calculator Excel Spreadsheet for Line Card Applications
- AN-144 Impulse Noise Benefits of Line Card Access Switches
- AN-100 Design Surge and Power Fault Protection for Subscriber Line Interfaces

## LITELINK Silicon DAA

- AN-158 LITELINKIII Application Circuit Calculations
- AN-157 Increased LITELINK Transmit Power
- AN-150 Ground-Start Supervision Circuit Using Clare's IAA110
- AN-146 Guidelines for Effective LITELINK Designs
- AN-102 Loop Current Detection for LITELINK

## Tone Signaling Products

- AN-142 M-949 - Loop Current Sensing and Ring Chatter
- AN-138 M-980 - Call Progress Tone Detector Applications
- AN-130 Call Progress Tone Standards
- AN-129 M-991 - Call Progress Tone Generator
- AN-128 M-980 - Algorithm for Call Progress Signal Detection
- AN-125 M-986 - Configuring the M-986 MF Trunk Signaling

# Worldwide Sales Offices

## Americas

**IXYS Integrated Circuits Division**  
**78 Cherry Hill Drive**  
**Beverly, MA USA 01915**

☎ +1 978 524 6700

📠 +1 978 524 4700

Toll-Free: 1-800-272-5273

email: [Customer\\_Service@clare.com](mailto:Customer_Service@clare.com)

## Asia

**IXYS Integrated Circuits Division**  
**Room N1016, Chia-Hsin**  
**Building II**  
**10F, No. 96, Sec. 2**  
**Chung Shan North Road**  
**Taipei, Taiwan**

☎ +886 2 2523 6368

📠 +886 2 2523 6369

email: [Sales@cpclare.com.tw](mailto:Sales@cpclare.com.tw)

## Europe

**European Customer Service**  
**Centre**  
**IXYS CH GmbH**  
**Mattenstr. 6a**  
**CH-2555 Brügg b. Biel**  
**Switzerland**

☎ +41 32 37440 20

📠 +41 32 37440 29


email: [customerservicech@ixys.ch](mailto:customerservicech@ixys.ch)

**IXYS Integrated Circuits Division**

Copyright © 2012, Clare, Inc. All rights reserved.



**IXYS**  
INTEGRATED CIRCUITS DIVISION

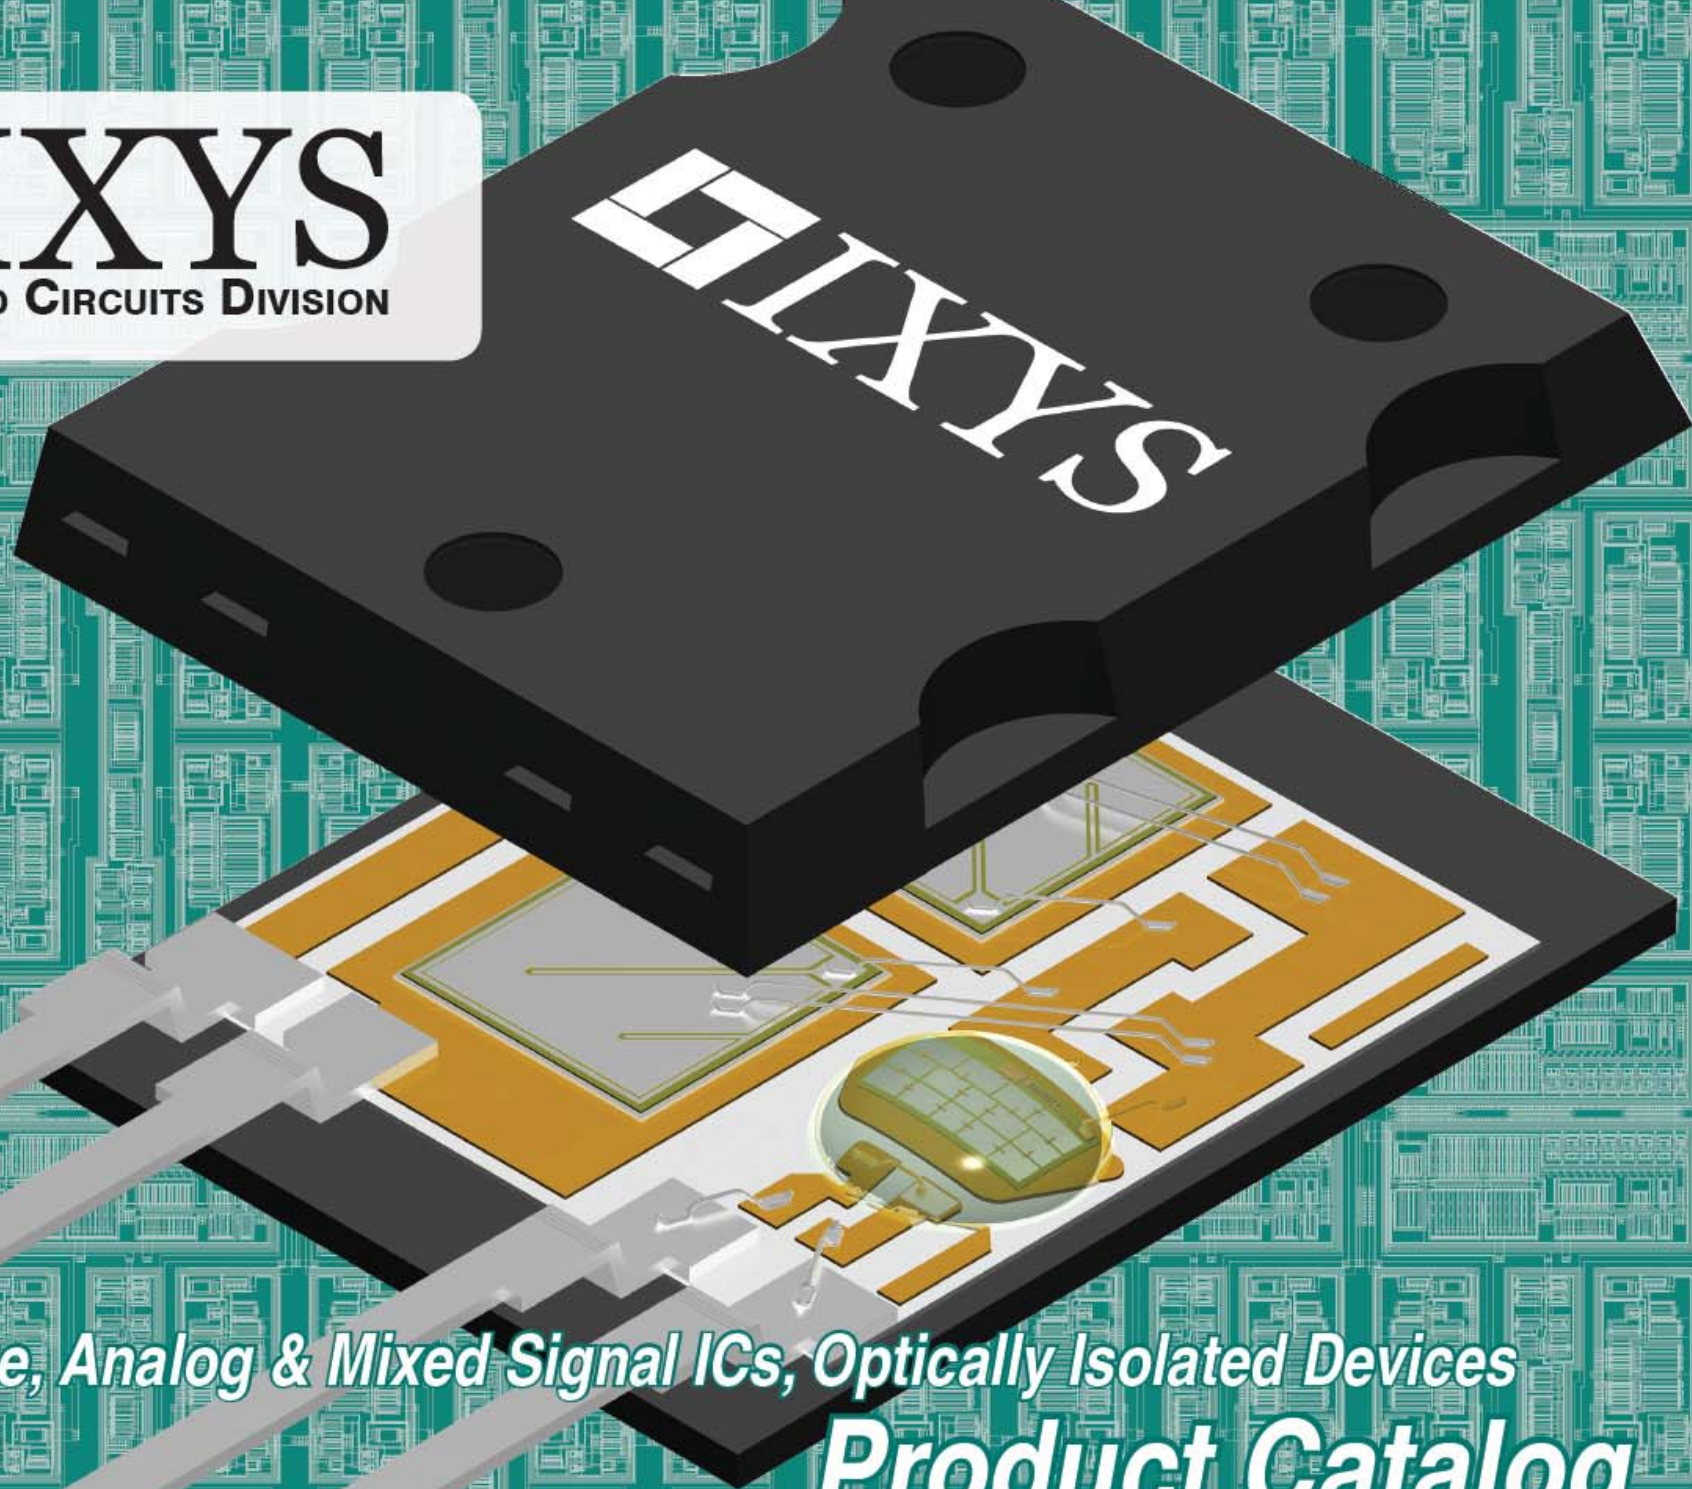

*High Voltage, Analog & Mixed Signal ICs, Optically Isolated Devices*

***Product Catalog***



# IXYS Integrated Circuits Division



Clare, Inc., founded by Carl P. Clare in 1937 as C. P. Clare & Company, was purchased by IXYS Corporation in 2002, and is now known as IXYS Integrated Circuits Division (as of April, 2012).

IXYS Integrated Circuits Division is a wholly owned subsidiary of IXYS Corporation. Located near Boston, Massachusetts, USA, IXYS Integrated Circuits Division designs, manufactures, and markets a wide variety of semiconductor devices, and is a major provider of optically isolated electronic components.

IXYS Integrated Circuits Division's unique mix of high voltage wafer fab, isolation barrier expertise, multi-chip packaging experience, and expertise in analog, power, and mixed signal design, points the way to more functionality in a smaller footprint at lower cost for your designs.

- **IGBT and MOSFET Drivers:** High voltage and low-side IGBT and MOSFET drivers, many of which are AEC-Q100 qualified.
- **High Voltage ICs:** High voltage 8-channel and 16-channel analog switches for the medical and imaging markets, high voltage LED drivers, and others.
- **Solid State Relays (SSR):** One of the industry's broadest lines of optically isolated SSRs, available in a wide selection of configurations, blocking voltages, and load currents.
- **Power Market:** Power solid state relays; SCR-based AC power switches (zero-cross & rapid turn-on); and N-channel, depletion-mode, field effect transistors (FET).
- **Lighting:** High voltage LED drivers.
- **High Speed Digital Optical Isolators:** New high speed isolators that pass DC signals, require no refresh clocking, and provide  $3750V_{rms}$  of galvanic isolation.
- **I<sup>2</sup>C Optically Isolated Bus Repeaters:** New high speed repeaters that buffer both I<sup>2</sup>C signals, require no refresh clocking, and provide  $3750V_{rms}$  of galvanic isolation.
- **Portable reader devices:** Drivers for ePaper readers and displays.
- **RFID Devices:** Read-Only and HDX devices for single transponder applications operating in the low frequency (134.2 kHz) range, and supporting ISO 11784/85 standards.
- **Non-volatile Digitally Programmable Capacitor:** Provides capacitive offset trimming for capacitance sensitive circuits.
- **Telecommunications:** a broad range of products:
  - LITELINK® silicon Data Access Arrangement (DAA)
  - Phone-line interface and monitoring devices
  - LCAS: Line Card Access Switch products
  - DC Termination devices for xDSL and ISDN applications
  - Cybergate™ DAA

# TABLE OF CONTENTS

## PART NUMBER INDEX

NUMERICAL INDEX TO ALL PRODUCT CATALOG DEVICES .....	4
--	---

## SOLID STATE RELAYS

1-FORM-A RELAYS (NORMALLY OPEN).....	7
1-FORM-B RELAYS (NORMALLY CLOSED) .....	10
MISCELLANEOUS RELAYS.....	11

## FAULT PROTECTED RELAYS

CURRENT LIMITING SSRs WITH VTS AND THM.....	13
---	----

## OPTICALLY ISOLATED POWER RELAYS

1-FORM-A POWER RELAYS: SINGLE-POLE BIDIRECTIONAL.....	15
1-FORM-A POWER RELAYS: SINGLE-POLE UNIDIRECTIONAL.....	15

## OPTICALLY ISOLATED AC POWER SWITCHES

OPTICALLY ISOLATED AC POWER SWITCHES: LOAD CURRENT $\leq 1A$ .....	16
OPTICALLY ISOLATED AC POWER SWITCHES: LOAD CURRENT $>1A$ .....	17

## MULTIFUNCTION PRODUCTS: SSR/OPTOCOUPLER

GENERAL PURPOSE MULTIFUNCTION PRODUCTS.....	18
TELECOM MULTIFUNCTION PRODUCTS.....	43

## FIELD EFFECT TRANSISTORS

N-CHANNEL DEPLETION MODE FETs.....	19
------------------------------------	----

## IGBT & MOSFET GATE DRIVERS

LOW-SIDE GATE DRIVERS .....	20
600V HIGH SIDE & LOW SIDE GATE DRIVER.....	21
HIGH VOLTAGE HALF-BRIDGE GATE DRIVER .....	21
600V HIGH SIDE IGBT & MOSFET GATE DRIVER .....	22
DUAL LOW SIDE IGBT GATE DRIVER .....	22
1200V HIGH AND LOW SIDE GATE DRIVER .....	23
2.5A OUTPUT OPTICALLY COUPLED GATE DRIVER .....	23
2.5A OUTPUT HI SPEED GATE DRIVER OPTOCOUPLER.....	23
OPTICALLY ISOLATED LOAD-BIASED GATE DRIVERS.....	24
OPTICALLY ISOLATED PHOTOVOLTAIC GATE DRIVERS.....	24

## HIGH VOLTAGE PRODUCTS

HIGH VOLTAGE ANALOG SWITCH ARRAYS .....	25
HIGH VOLTAGE ISOLATED ANALOG SWITCHES .....	26

## HIGH SPEED DIGITAL OPTICAL ISOLATORS

OPTICALLY ISOLATED I <sup>2</sup> C BUS REPEATERS .....	28
SINGLE-CHANNEL EACH DIRECTION DIGITAL OPTICAL ISOLATOR.....	29
DUAL HIGH SPEED DIGITAL OPTICAL ISOLATOR .....	29

## OPTOCOUPLERS

SINGLE & DUAL OPTOCOUPLERS .....	30
LINEAR OPTOCOUPLERS .....	31
OPTICALLY ISOLATED ERROR AMPLIFIERS .....	32

## LIGHTING & DISPLAY PRODUCTS

HIGH VOLTAGE LED DRIVERS.....	33
ePAPER GATE & SOURCE DRIVERS .....	34

## TELECOMMUNICATIONS PRODUCTS

LITELINK™ SILICON DAA PHONE LINE INTERFACE .....	36
VOLTAGE MONITOR DEVICES .....	37
SINGLE-CHANNEL VOICE-BAND CODEC .....	38
CALL PROGRESS TONE DETECTOR.....	38
DC TERMINATION ICs (xDSL, ISDN).....	39
LINE CARD ACCESS SWITCHES (LCAS).....	40
LCAS FOR RINGING SLIC .....	41
CYBERGATE™ DATA ACCESS ARRANGEMENT (DAA) MODULES.....	41
EMBEDDED MODEM MODULE .....	42
LINE SENSE RELAY .....	42
TELECOM MULTIFUNCTION PRODUCTS.....	43

## RFID PRODUCTS

RFID TAGS.....	44
----------------	----

## OTHER SEMICONDUCTOR PRODUCTS

NON-VOLATILE DIGITAL PROGRAMMABLE CAPACITOR .....	45
HALL-EFFECT SWITCHES.....	46
LOAD DRIVER.....	46

**Note:** Drawings and photographs of IXYS Integrated Circuits Division products shown in this catalog are for illustrative purposes only and do not necessarily portray accurate physical details, marking, or branding. They exist solely to provide additional useful information.

# PART NUMBER INDEX

CPC1001N	30	CPC1301	30	CPC1907B	15	CPC1978J	15	CPC40055ST	17	CYG2020	41
CPC1002N	11	CPC1302	30	CPC1908J	15	CPC1979J	15	CPC44055ST	17	CYG2100	41
CPC1004N	11	CPC1303	30	CPC1909J	15	CPC1981Y	15	CPC5001	29	CYG2110	41
CPC1006N	7	CPC1317	7	CPC1916Y	15	CPC1983B	15	CPC5002	29	CYG2111	41
CPC1008N	7	CPC1330	7	CPC1918J	15	CPC1983Y	15	CPC5602	19	CYG2217	41
CPC1009N	7	CPC1333	10	CPC1926Y	15	CPC1983YE	15	CPC5603	19	CYG2218	41
CPC1010N	7	CPC1335	7	CPC1927J	15	CPC1986J	15	CPC5620	36	CYG2320	41
CPC1014N	7	CPC1390	8	CPC1943	16	CPC1988J	15	CPC5621	36	FDA215	24
CPC1016N	7	CPC1393	8	CPC1945G	16	CPC1998J	17	CPC5622	36	FDA217	24
CPC1017N	7	CPC1394	8	CPC1945Y	16	CPC2014N	9	CPC5710	37	IAA110	18
CPC1018N	7	CPC1465	39	CPC1961	16	CPC2017N	9	CPC5712	37	IAB110	18
CPC1019N	7	CPC1466	39	CPC1963	16	CPC2025N	9	CPC5750	38	IAD110	18
CPC1020N	7	CPC1510	7, 13	CPC1964B	17	CPC2030N	9	CPC5902	28	IBB110	18
CPC1025N	8	CPC1540	8, 13	CPC1964BX6	17	CPC2125N	10	CPC5903	28	ITC117	43
CPC1030N	7	CPC1560	7, 13	CPC1964G	16	CPC2317N	11	CPC7220	25	ITC117L	43
CPC1035N	7	CPC1563	8, 13	CPC1964Y	16	CPC2330N	11	CPC7232	25	ITC135	43
CPC1106N	10	CPC1580	24	CPC1965G	16	CPC2400E	42	CPC7512	27	ITC137	43
CPC1114N	10	CPC1590	24	CPC1965Y	16	CPC2907B	15	CPC7514	26	IX2113	21
CPC1117N	10	CPC1593	8, 13	CPC1966	17	CPC3701	19	CPC7524	26	IX2120	23
CPC1125N	10	CPC1706Y	15	CPC1966B	17	CPC3703	19	CPC75282	40	IX2127	22
CPC1130N	10	CPC1708J	15	CPC1966BX8	17	CPC3708	19	CPC7591	40	IX21844	21
CPC1135N	10	CPC1709J	15	CPC1966YX6	17	CPC3710	19	CPC7592	40	IX2204	22
CPC1150N	10	CPC1718J	15	CPC1966YX8	17	CPC3714	19	CPC7601	25	IX3120	23
CPC1215	11	CPC1726Y	15	CPC1967J	15	CPC3720	19	CPC7691	40	IX3180	23
CPC1217	11	CPC1727J	15	CPC1968J	15	CPC3730	19	CPC7692	40	IX4423	20
CPC1218	11	CPC1777J	15	CPC1972	16	CPC3902	19	CPC7695	40	IX4424	20
CPC1219	12	CPC1779J	15	CPC1973Y	15	CPC3909	19	CPC7701	25	IX4424G	20
CPC1225N	8	CPC1786J	15	CPC1976	17	CPC3960	19	CPC9909	33	IX4425	20
CPC1230N	7	CPC1788J	15	CPC1976YX6	17	CPC3980	19	CYG2000	41	IX4426	20
CPC1231N	10	CPC1906Y	15	CPC1977J	15	CPC3982	19	CYG2011	41	IX4427	20

IX4428	20	LBA127	11	LCB120	10	LOC211	31	PD2601	16	TS190	18
IX9908	33	LBA127L	11	LCB126	10	M-949-11	42	PLA110	8	TS190L	18
IXD_602	20	LBA710	11	LCB127	10	M-980-02	38	PLA110L	8	XAA117	9
IXD_604	20	LBA716	11	LCB710	10	MX860	35	PLA132	7	XAA170	9
IXD_604SI	20	LBB110	10	LCB716	10	MX877	46	PLA134	7	XBA170	11
IXD_604SIA	20	LBB120	10	LCB717	10	MX887D	46	PLA140	8	XBB170	10
IXD_609	20	LBB126	10	LCC110	12	MX887P	46	PLA140L	8	XCA170	7
IXD_609SI	20	LBB127	10	LCC120	12	MXEI1480	35	PLA143	8	XCB170	10
IXD_614	20	LCA100	8	LDA100	30	MXEI2240	34	PLA150	7	XS170	18
IXD_614SI	20	LCA100L	8	LDA101	30	MXHV9910	33	PLA160	7		
IXD_630	20	LCA110	8	LDA102	30	NCD1015ZP	44	PLA170	8		
IXD_630M	20	LCA110L	8	LDA110	30	NCD1015M	44	PLA171	8		
IXEP1400	34	LCA120	7	LDA111	30	NCD2100	45	PLA190	8		
IXEP2300	34	LCA120L	7	LDA200	30	OAA160	9	PLA191	8		
LAA100	9	LCA125	7	LDA201	30	OMA160	7	PLA192	8		
LAA100L	9	LCA125L	7	LDA202	30	PAA110	9	PLA193	8		
LAA108	9	LCA127	7	LDA203	30	PAA110L	9	PLA194	8		
LAA110	9	LCA127L	7	LDA210	30	PAA127	9	PLB150	10		
LAA110L	9	LCA129	7	LDA211	30	PAA132	9	PLB171	10		
LAA120	9	LCA182	8	LDA212	30	PAA140	9	PLB190	10		
LAA120L	9	LCA210	12	LDA213	30	PAA140L	9	PM1204	16		
LAA125	9	LCA210L	12	LIA120	32	PAA150	9	PM1205	16		
LAA125L	9	LCA220	12	LIA130	32	PAA190	9	PM1206	16		
LAA127	9	LCA701	7	LIA135	32	PAA191	9	PS1201	16		
LAA127L	9	LCA710	7	LIA136	32	PAA193	9	PS2401	16		
LAA710	9	LCA712	7	LOC110	31	PBA150	11	PS2601	16		
LBA110	11	LCA715	7	LOC111	31	PBB150	10	TS117	18		
LBA110L	11	LCA717	7	LOC112	31	PBB190	10	TS117L	18		
LBA120	11	LCB110	10	LOC117	31	PD1201	16	TS118	18		
LBA120L	11	LCB111	10	LOC210	31	PD2401	16	TS120	18		

# SOLID STATE RELAYS



- **Replace electromechanical relays**
- **Replace mechanical switches**
- **Implement computer control of electromechanical circuits**

## Features:

- Low drive current
- High reliability
- No EMI/RFI generation
- Arc-free with no snubbing circuits
- AC or DC switching
- Current limiting devices available
- FCC compatible
- Low off-state leakage

## Applications:

- Telecommunications/data communications
- Instrumentation
- Multiplexers
- Data acquisition/electronic switching
- Meters (Watt-hour, water, gas)
- Medical equipment (patient/equipment isolation)
- Security
- Aerospace
- Industrial controls

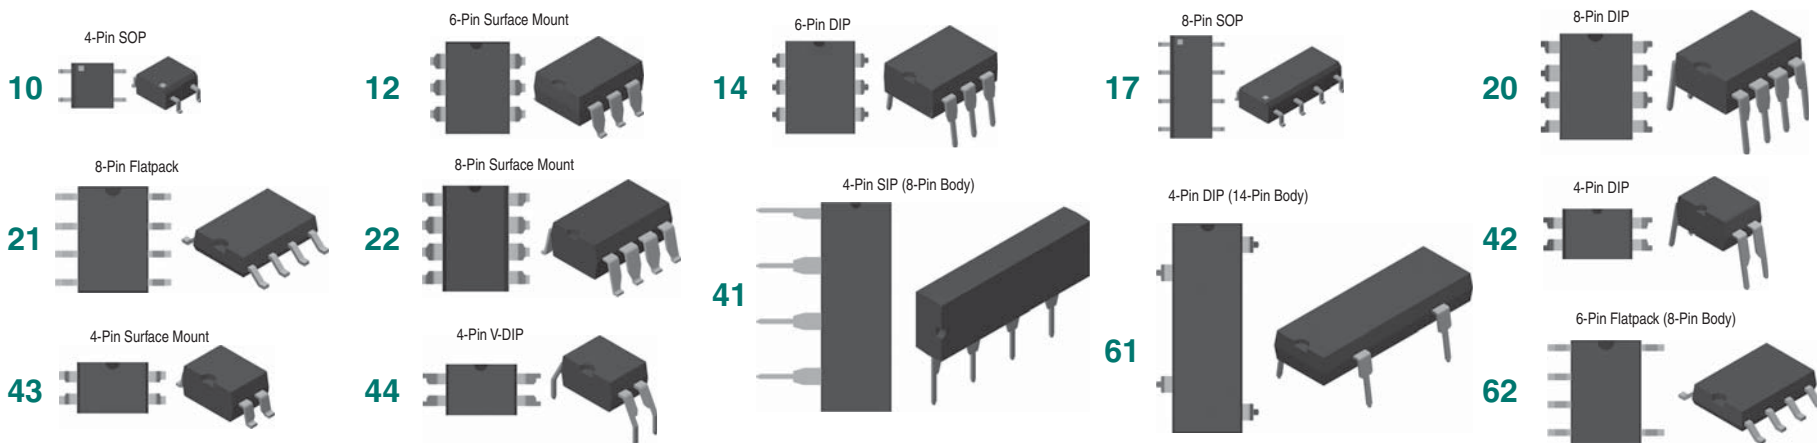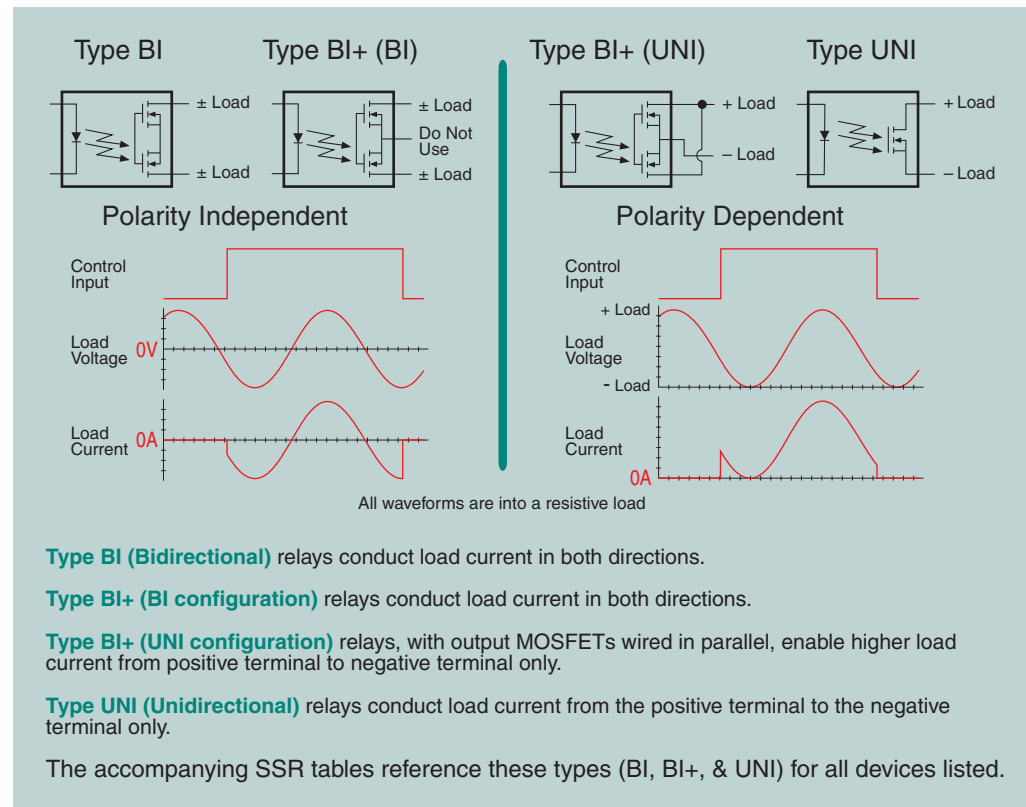


Packages are referenced by number in the accompanying solid state relay selection tables.

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

# • 1-FORM-A RELAYS (NORMALLY OPEN)


## 1-Form-A Relays: Single-Pole

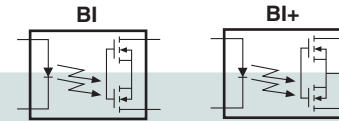

Part Number	Relay Type	Blocking Voltage	Load Current	On Resistance	Input Control Current	Switching Speeds	Isolation Voltage	Off-State Leakage	Package Type (Page 6)	Features and Comments
		(V <sub>p</sub> )	(mA)	(Ω)	(mA)	t <sub>on</sub> / t <sub>off</sub> (ms)	(V <sub>rms</sub> )	(μA)		
CPC1020N	BI	30	1200	0.25	2	3 / 3	1500	1	10	High load current, very low on-resistance
LCA717	BI+	30	2000	0.15	2	3 / 3	3750	1	12, 14	High Load Current
CPC1006N	BI	60	75	10	0.5	10 / 10	1500	1	10	Low I <sub>F</sub> , EN 50130-4
CPC1017N	BI	60	100	16	1	10 / 10	1500	1	10	Low I <sub>F</sub> , EN 50130-4
CPC1560	BI+	60	300	5.6	1.1	0.1 / 0.4	3750	1	20, 22	Current limiting with thermal management - see page 13
CPC1014N	BI	60	400	2	2	2 / 1	1500	1	10	EN 50130-4
CPC1018N	BI	60	600	0.8	1	3 / 2	1500	1	10	Low I <sub>F</sub> , EN 50130-4
PLA132	BI+	60	600	1	2	5 / 2	3750	1	12, 14	
CPC1019N	BI	60	750	0.6	2	3 / 3	1500	1	10	
LCA710	BI+	60	1000	0.5	10	2.5 / 0.25	3750	1	12, 14	High Load Current
LCA712	BI+	60	1000	0.5	10	2.5 / 0.35	3750	0.01	12, 14	High Load Current, Low I <sub>LEAK</sub>
LCA715	BI+	60	2200	0.15	5	2.5 / 0.25	3750	1	12, 14	High Load Current
CPC1317	BI	70	150	16	1	2.5 / 2.5	3750	1	21	EN 50130-4 (installation class 3), transient voltage suppression (TVS)
CPC1016N	BI	100	100	16	2	2 / 1	1500	1	10	
CPC1008N	BI	100	150	8	2	2 / 1	1500	1	10	
CPC1009N	BI	100	150	8	2	2 / 0.5	1500	0.02	10	Very low off-state I <sub>LEAK</sub> ≤ 20nA
PLA134	BI+	100	350	3	5	5 / 5	3750	1	12, 14	
LCA701	BI+	100	1500	0.3	2	4 / 1	3750	1	12, 14	High Load Current
OMA160	BI+	250	50	100	10	0.125 / 0.125	3750	0.025	12, 14	Low I <sub>LEAK</sub> , Fast Switching Times
LCA120L	BI+	250	150	20	5	3 / 3	3750	1	12, 14	Current limiting
LCA120	BI+	250	170	20	5	3 / 3	3750	1	12, 14	
LCA127L	BI+	250	170	15	5	5 / 5	3750	1	12, 14	Current limiting
LCA129	BI+	250	170	20	2	8 / 8	3750	1	12, 14	
CPC1010N	BI	250	170	11.5	2	3 / 3	1500	1	10	
CPC1510	BI+	250	200	15	2	2 / 2	3750	1	12, 14	Current limiting with thermal management - see page 13
LCA127	BI+	250	200	10	5	5 / 5	3750	1	12, 14	
PLA150	BI+	250	250	7	5	2.5 / 0.5	3750	1	12, 14	
PLA160	BI+	300	50	100	10	0.05 / 0.05	3750	0.025	12, 14	Low I <sub>LEAK</sub> , Fast Switching Times
LCA125	BI+	300	170	16	5	5 / 5	3750	1	12, 14	
LCA125L	BI+	300	170	20	5	5 / 5	3750	1	12, 14	Current limiting
CPC1035N	BI	350	100	35	2	2 / 1	1500	1	10	
CPC1335	BI	350	100	35	1	10 / 10	3750	1	21	Low I <sub>F</sub> , EN 50130-4 (installation class 3), transient voltage suppression (TVS)
XCA170	BI+	350	100	50	5	5 / 5	3750	1	12, 14	
CPC1030N	BI	350	120	30	2	2 / 1	1500	1	10	
CPC1230N	BI	350	120	30	2	2 / 1	1500	1	10	EN/IEC 60950-1 Supplementary Insulation (0.4mm distance through insulation)
CPC1330	BI	350	120	30	2	2 / 1	5000	1	42, 43	Enhanced isolation voltage


For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

## 1-Form-A Relays: Single-Pole (continued)

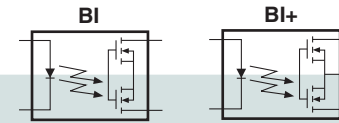

Part Number	Relay Type	Blocking Voltage	Load Current	On Resistance	Input Control Current	Switching Speeds	Isolation Voltage	Off-State Leakage	Package Type (Page 6)	Features and Comments
		(V <sub>p</sub> )	(mA)	(Ω)	(mA)	t <sub>on</sub> / t <sub>off</sub> (ms)	(V <sub>rms</sub> )	(μA)		
CPC1540	BI+	350	120	25	2	2 / 2	3750	1	12, 14	Current limiting with thermal management - see page 13
LCA100	BI+	350	120	25	5	5 / 5	3750	1	12, 14	
LCA100L	BI+	350	120	25	5	5 / 5	3750	1	12, 14	Current limiting
LCA110	BI+	350	120	35	2	3 / 3	3750	1	12, 14	
LCA110L	BI+	350	120	35	2	3 / 3	3750	1	12, 14	Current limiting
LCA182	BI+	350	120	35	0.25	3 / 3	3750	1	12, 14	Very Low I <sub>F</sub>
CPC1025N	BI	400	120	30	2	2 / 1	1500	1	10	
CPC1225N	BI	400	120	30	2	2 / 1	1500	1	10	EN/IEC 60950-1 Supplementary Insulation (0.4mm distance through insulation)
CPC1390	BI	400	140	22	2	1 / 1	5000	1	42, 43, 44	Enhanced isolation voltage
PLA110	BI+	400	150	22	5	1 / 0.5	3750	1	12, 14	
PLA110L	BI+	400	150	25	5	1 / 0.25	3750	-	12, 14	Current Limiting
PLA190	BI+	400	150	22	5	1 / 0.5	5000	1	12, 14	Enhanced Isolation Voltage
PLA140L	BI+	400	200	13	5	5 / 3	3750	1	12, 14	Current Limiting
PLA140	BI+	400	250	8	5	3 / 1	3750	1	12, 14	
PLA191	BI+	400	250	8	5	3 / 1	5000	1	12, 14	Enhanced Isolation Voltage
CPC1393	BI	600	90	50	2	5 / 5	5000	1	42, 43, 44	Enhanced isolation voltage
PLA143	BI+	600	100	50	2	5 / 5	4000	1	12, 14	Enhanced Isolation Voltage
PLA193	BI+	600	100	50	5	5 / 5	5000	1	12, 14	Enhanced Isolation Voltage, PLA193E is DIN EN 60747-5-5 Certified
CPC1394	BI	600	120	35	2	5 / 3	5000	1	42, 43, 44	Enhanced isolation voltage
CPC1563	BI+	600	120	35	2	2 / 2	3750	1	12, 14	Current limiting with thermal management - see page 13
CPC1593	BI+	600	120	35	2	2 / 2	3750	1	12, 14	Current limiting, thermal management, voltage triggered shutdown - see page 13
PLA194	BI+	600	130	35	2	3 / 2	5000	1	12, 14	Enhanced Isolation Voltage
PLA192	BI+	600	150	22	5	5 / 5	5000	1	12, 14	Enhanced Isolation Voltage, PLA192E is DIN EN 60747-5-5 Certified
PLA170	BI+	800	100	50	5	5 / 5	3750	1	12, 14	
PLA171	BI	800	100	50	2	5 / 5	5000	1	62	Enhanced Isolation Voltage, High Blocking Voltage (Output Pins 7mm Separation)

## 1-Form-A Relays: Dual Single-Pole




Part Number	Relay Type	Blocking Voltage	Load Current	On Resistance	Input Control Current	Switching Speeds	Isolation Voltage	Off-State Leakage	Package Type	Features and Comments
		(V <sub>p</sub> )	(mA)	(Ω)	(mA)	t <sub>on</sub> / t <sub>off</sub> (ms)	(V <sub>rms</sub> )	(μA)	(Page 6)	
CPC2017N	BI	60	120	16	1	3 / 3	1500	1	17	Low I <sub>F</sub> , EN 50130-4
XAA117	BI	60	150	16	1	5 / 5	3750	1	20, 21, 22	Low I <sub>F</sub>
CPC2014N	BI	60	400	2	2	2 / 1	1500	1	17	EN 50130-4
PAA132	BI	60	600	1	2	5 / 2	3750	1	20, 22	
LAA710	BI	60	1000	0.5	10	2.5 / 0.25	3750	1	20, 22	
LAA108	BI	100	300	8	2	3 / 3	3750	1	20, 21, 22	
OAA160	BI	250	50	100	3	0.125 / 0.125	3750	0.025	20, 21, 22	Very Low I <sub>LEAK</sub> , Fast Switching Times
LAA120L	BI	250	150	25	5	5 / 5	3750	1	20, 21, 22	Current Limiting
LAA120	BI	250	170	20	5	5 / 5	3750	1	20, 21, 22	
LAA127L	BI	250	170	15	5	5 / 5	3750	1	20, 21, 22	Current Limiting
LAA127	BI	250	200	10	5	5 / 5	3750	1	20, 21, 22	
PAA150	BI	250	250	7	5	2.5 / 0.5	3750	1	20, 21, 22	
PAA127	BI	280	200	10	3	0.5 / 0.5	3750	0.025	20, 21, 22	Very Low I <sub>LEAK</sub> , Fast Switching Times
XAA170	BI	350	100	50	5	5 / 5	3750	1	20, 21, 22	
CPC2030N	BI	350	120	30	2	2 / 1	1500	1	17	
LAA100	BI	350	120	25	5	5 / 5	3750	1	20, 21, 22	
LAA100L	BI	350	120	25	5	5 / 5	3750	1	20, 21, 22	Current Limiting
LAA110	BI	350	120	35	5	3 / 3	3750	1	20, 21, 22	
LAA110L	BI	350	120	35	5	3 / 3	3750	1	20, 21, 22	Current Limiting
LAA125L	BI	350	150	18	5	5 / 5	3750	1	20, 21, 22	Current Limiting
LAA125	BI	350	170	16	5	5 / 5	3750	1	20, 21, 22	
CPC2025N	BI	400	120	30	2	2 / 1	1500	1	17	
PAA110	BI	400	150	22	5	1 / 0.25	3750	1	20, 21, 22	
PAA110L	BI	400	150	25	5	1 / 0.5	3750	1	20, 21, 22	Current Limiting
PAA190	BI	400	150	22	5	1 / 0.5	5000	1	20, 22	Enhanced Isolation Voltage
PAA140L	BI	400	200	13	5	5 / 3	3750	1	20, 22	Current Limiting
PAA140	BI	400	250	8	5	3 / 1	3750	1	20, 21, 22	
PAA191	BI	400	250	8	5	3 / 1	5000	1	20, 22	Enhanced Isolation Voltage
PAA193	BI	600	100	50	5	5 / 5	5000	10	20, 22	Enhanced Isolation Voltage

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)




# • 1-FORM-B RELAYS (NORMALLY CLOSED)

## 1-Form-B Relays: Single-Pole

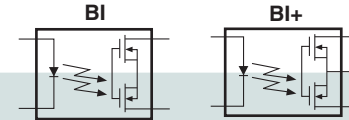

Part Number	Relay Type	Blocking Voltage	Load Current	On Resistance	Input Control Current	Switching Speeds	Isolation Voltage	Off-State Leakage	Package Type (Page 6)	Features and Comments
		(V <sub>p</sub> )	(mA)	(Ω)	(mA)	t <sub>on</sub> / t <sub>off</sub> (ms)	(V <sub>rms</sub> )	(μA)		
LCB717	BI+	30	1500	0.3	2	2 / 5	3750	1	12, 14	High Load Current
CPC1106N	BI	60	75	10	0.5	10 / 10	1500	1	10	Low I <sub>F</sub> , EN 50130-4
CPC1117N	BI	60	150	16	1	10 / 10	1500	1	10	Low I <sub>F</sub> , EN 50130-4
CPC1114N	BI	60	400	2	2	2 / 5	1500	1	10	
LCB716	BI+	60	500	2	2	3 / 3	3750	1	12, 14	
LCB710	BI+	60	1000	0.6	2	3 / 3	3750	1	12, 14	High Load Current
LCB120	BI+	250	170	20	5	5 / 5	3750	1	12, 14	
LCB126	BI+	250	170	15	5	5 / 5	3750	1	12, 14	
LCB127	BI+	250	200	10	5	5 / 5	3750	1	12, 14	
PLB150	BI+	250	250	7	5	1 / 2.5	3750	1	12, 14	
XCB170	BI+	350	100	50	5	5 / 5	3750	1	12, 14	
CPC1130N	BI	350	120	30	2	2 / 2	1500	5	10	
CPC1135N	BI	350	120	35	2	2 / 2	1500	5	10	
CPC1150N	BI	350	120	50	2	1 / 2	1500	5	10	
CPC1231N	BI	350	120	30	2	2 / 2	1500	5	10	EN/IEC 60950-1 Supplementary Insulation (0.4mm distance through insulation)
LCB110	BI+	350	120	35	5	3 / 3	3750	1	12, 14	
LCB111	BI+	350	120	35	2	5 / 5	3750	1	12, 14	
CPC1333	BI	350	130	30	2	2 / 3	5000	1	42, 43	Enhanced Isolation Voltage
CPC1125N	BI	400	100	35	2	2 / 2	1500	5	10	
PLB190	BI+	400	130	25	2	1 / 2.5	5000	1	12, 14	Enhanced Isolation Voltage
PLB171	BI	800	80	55	2	5 / 5	5000	1	62	Enhanced Isolation Voltage, High Blocking Voltage (Output Pins 7mm Separation)

## 1-Form-B Relays: Dual Single-Pole




Part Number	Relay Type	Blocking Voltage	Load Current	On Resistance	Input Control Current	Switching Speeds	Isolation Voltage	Off-State Leakage	Package Type (Page 6)	Features and Comments
		(V <sub>p</sub> )	(mA)	(Ω)	(mA)	t <sub>on</sub> / t <sub>off</sub> (ms)	(V <sub>rms</sub> )	(μA)		
LBB120	BI	250	170	20	5	5 / 5	3750	1	20, 22	
LBB126	BI	250	170	15	5	5 / 5	3750	1	20, 21, 22	
LBB127	BI	250	200	10	5	5 / 5	3750	1	20, 21, 22	
PBB150	BI	250	250	7	5	2.5 / 2.5	3750	1	20, 21, 22	
XBB170	BI	350	100	50	5	5 / 5	3750	1	20, 21, 22	
LBB110	BI	350	120	35	5	3 / 3	3750	1	20, 21, 22	
CPC2125N	BI	400	100	35	2	2 / 2	1500	5	17	
PBB190	BI	400	130	25	2	1 / 2.5	5000	1	20, 22	

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

## MISCELLANEOUS RELAYS


### 1-Form-A & 1-Form-B Combination Relays

Part Number	Relay Type	Blocking Voltage	Load Current	On Resistance	Input Control Current	Switching Speeds	Isolation Voltage	Off-State Leakage	Package Type (Page 6)	Features and Comments
		(V <sub>p</sub> )	(mA)	(Ω)	(mA)	t <sub>on</sub> / t <sub>off</sub> (ms)	(V <sub>rms</sub> )	(μA)		
CPC2317N	BI	60	120	16	1	3 / 3	1500	1 / 1	17	Low I <sub>F</sub>
LBA710	BI	60	1000	0.6	2	5 / 5	3750	1 / 1	20, 22	High Load Current
LBA716	BI	60	1000	0.4	2	5 / 5	3750	1 / 1	20, 22	High Load Current
LBA120L	BI	250	150	25	5	5 / 5	3750	1 / 1	20, 22	Current Limiting
LBA127L	BI	250	150	15	5	5 / 5	3750	1 / 1	20, 22	Current Limiting
LBA120	BI	250	170	20	5	5 / 5	3750	1 / 1	20, 21, 22	
LBA127	BI	250	200	10	5	5 / 5	3750	1 / 1	20, 21, 22	
PBA150	BI	250	250	7	5	2.5 / 2.5	3750	1 / 1	20, 22	
XBA170	BI	350	100	50	2	5 / 5	3750	1 / 1	20, 21, 22	
CPC2330N	BI	350	120	30	2	3 / 3	1500	1 / 5	17	
LBA110	BI	350	120	35	2	3 / 3	3750	1 / 1	20, 21, 22	
LBA110L	BI	350	120	35	5	3 / 3	3750	1 / 1	20, 21, 22	Current Limiting




### 1-Form-A Relays: Single-Pole, Unidirectional (DC-only)

Part Number	Relay Type	Blocking Voltage	Load Current	On Resistance	Input Control Current	Switching Speeds	Isolation Voltage	Off-State Leakage	Package Type (Page 6)	Features and Comments
		(V <sub>p</sub> )	(mA)	(Ω)	(mA)	t <sub>on</sub> / t <sub>off</sub> (ms)	(V <sub>rms</sub> )	(μA)		
CPC1002N	UNI	60	700	0.55	2	5 / 2	1500	1	10	EN 50130-4
CPC1004N	UNI	100	300	4	2	3 / 1	1500	1	10	Extended Operating Temperature Range: -40°C to +110°C




### 1-Form-A Relays: Single-Pole, Voltage-Controlled

Part Number	Relay Type	Blocking Voltage	Load Current	On Resistance	Input Control Voltage	Switching Speeds	Isolation Voltage	Off-State Leakage	Package Type (Page 6)	Features and Comments
		(V <sub>p</sub> )	(mA)	(Ω)	(V)	t <sub>on</sub> / t <sub>off</sub> (ms)	(V <sub>rms</sub> )	(μA)		
CPC1217	BI	60	200	16	5 - 12	5 / 5	2500	1	41	EN 50130-4, direct drop-in reed relay replacement
CPC1218	BI	60	600	1.1	5 - 12	5 / 5	2500	1	41	EN 50130-4, direct drop-in reed relay replacement
CPC1215	BI	400	500	6	5 - 12	5 / 3	3750	1	61	Direct drop-in reed relay replacement




## 1-Form-B Relays: Single-Pole, Voltage-Controlled

Part Number	Relay Type	Blocking Voltage	Load Current	On Resistance	Input Control Voltage	Switching Speeds	Isolation Voltage	Off-State Leakage	Package Type (Page 6)	Features and Comments
		(V <sub>p</sub> )	(mA)	(Ω)	(V)	t <sub>on</sub> / t <sub>off</sub> (ms)	(V <sub>rms</sub> )	(μA)		
CPC1219	BI	60	200	16	5 - 12	5 / 5	2500	1	41	EN 50130-4, direct drop-in reed relay replacement




## 2-Form-A Relays: Double-Pole, Single-Throw

Part Number	Relay Type	Blocking Voltage	Load Current	On Resistance	Input Control Current	Switching Speeds	Isolation Voltage	Off-State Leakage	Package Type (Page 6)	Features and Comments
		(V <sub>p</sub> )	(mA)	(Ω)	(mA)	t <sub>on</sub> / t <sub>off</sub> (ms)	(V <sub>rms</sub> )	(μA)		
LCA220	BI	250	120	20	10	5 / 5	3750	1	20, 22	
LCA210	BI	350	85	35	8	3 / 3	3750	1	20, 22	
LCA210L	BI	350	85	35	8	4 / 4	3750	1	20, 22	Current limiting



## 1-Form-C Relays: Common Input, Single-Pole, Double-Throw


Part Number	Relay Type	Blocking Voltage	Load Current	On Resistance	Input Control Current	Switching Speeds	Isolation Voltage	Off-State Leakage	Package Type (Page 6)	Features and Comments
		(V <sub>p</sub> )	(mA)	(Ω)	(mA)	t <sub>on</sub> / t <sub>off</sub> (ms)	(V <sub>rms</sub> )	(μA)		
LCC120	BI	250	170	20	10	5 / 5	3750	1	20, 22	
LCC110	BI	350	120	35	8	4 / 4	3750	1	20, 21, 22	



# FAULT PROTECTED RELAYS

## CURRENT LIMITING SSRs WITH VOLTAGE TRIGGERED SHUTDOWN & THERMAL MANAGEMENT


- Active current-limiting circuitry
- Integrated thermal management (ThM)
- Voltage triggered shutdown (VTS)
  - Provide excellent power-cross immunity
  - Ideal for use in electromagnetically noisy environments
  - Resumes normal operation when faults have been removed

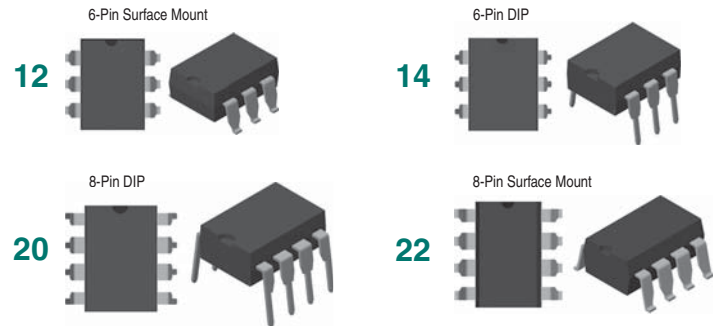

Part Number	Blocking Voltage ( $V_p$ )	Input Control Current (mA)	On-Resistance (Maximum)		Load Current (Maximum)		Current Limit (Maximum)		* VTS Threshold ( $V_{TH}$ ) (V)	Switching Speed ( $t_{on} / t_{off}$ ) (ms)	Isolation Voltage ( $V_{rms}$ )	Package Type	Features & Comments
			DC-Only ( $\Omega$ )	AC ( $\Omega$ )	DC-Only (mA)	AC (mA)	DC-Only ( $mA_p$ )	AC ( $mA_p$ )					
CPC1560	60	1.1	1.4	5.6	600	300	1500	900	-	0.1 / 0.4	3750	20, 22	Fast switching speeds
CPC1510	250	2	3.75	15	350	200	920	450	-	2 / 2	3750	12, 14	Industrial applications
CPC1540	350	2	6.75	25	250	120	570	285	100	2 / 2	3750	12, 14	PSTN hook switch applications
CPC1563	600	2	11.75	35	250	120	570	285	100	2 / 2	3750	12, 14	High blocking voltage
CPC1593	600	2	11.75	35	250	120	570	285	21	2 / 2	3750	12, 14	Power supply start-up


\* Deactivates the switch when the load voltage exceeds the  $V_{TH}$  threshold while the switch is in current limit.

CPC1540, CPC1563, CPC1593

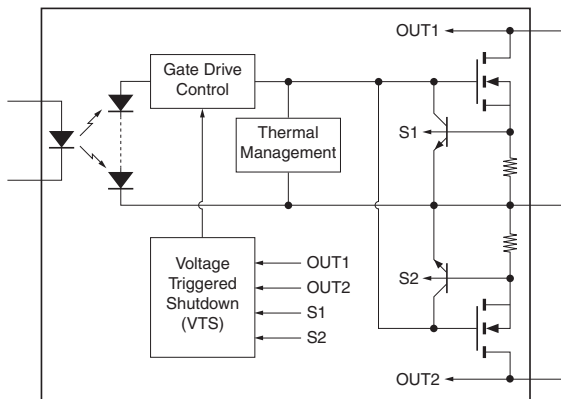

### Applications:

- Telephony hook switch
- VoIP gateways
- I/O subsystems
- Electronic switching
- Medical equipment (Patient/equipment isolation)
- Security
- Aerospace
- Industrial controls

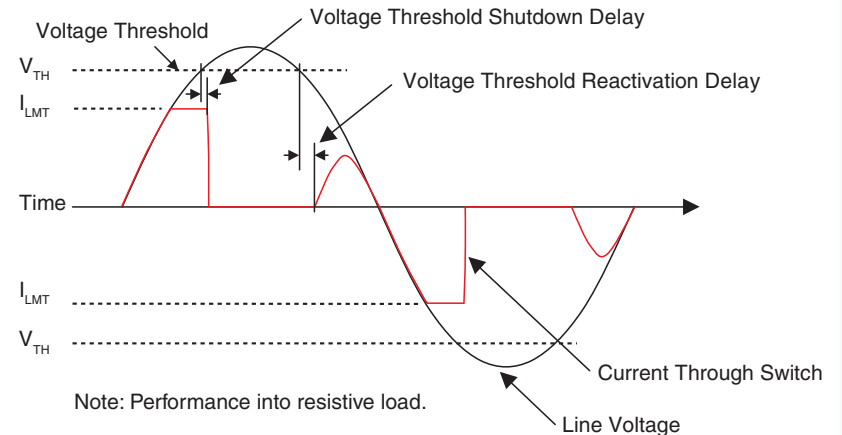

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

# OPTICALLY ISOLATED POWER RELAYS


- Blocking voltage up to  $1000V_p$
- On-resistance as low as 0.05 Ohms
- On/off times from 1ms to 25ms
- MOSFET-based AC/DC and DC-only power relays
- Load current up to  $22.8A_{DC}$  (with  $5^{\circ}C/W$  heat sink)
- $2500V_{rms}$  isolation from input to output and to DCB substrate

## Features:

- Isolated, low thermal impedance pad for heat sink applications
- Low input control current
- Low thermal impedances, junction to case ( $\theta_{JC}$ ):
  - 0.30 $^{\circ}C/W$  - ISOPLUS-264
  - 0.35 $^{\circ}C/W$  - i4-PAC
  - 1.50 $^{\circ}C/W$  - Power SIP


## Applications:

- Robotics
- Medical equipment
- Railroad/traffic controls
- Consumer appliances
- Industrial control
- Test and measurement equipment

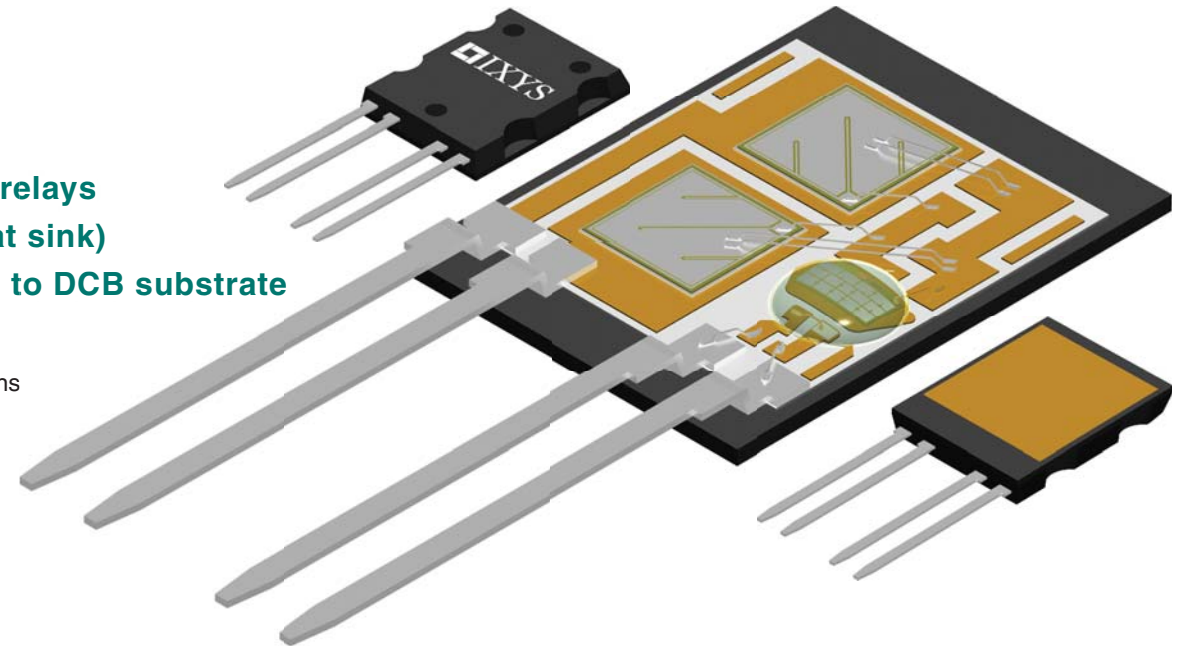


***Metallized, external, Direct Copper Bond (DCB) surface for heat sink applications***


66 - Power SOIC

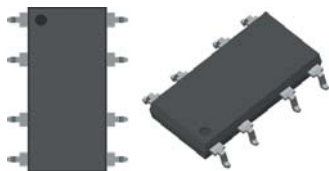


36 - Power SIP

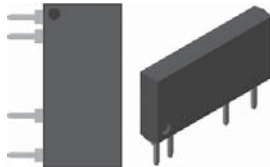

29 - i4-PAC

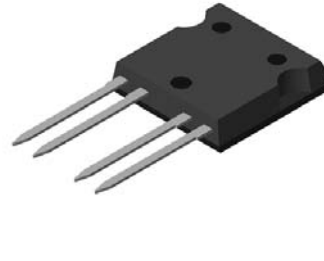

37 - ISOPLUS-264

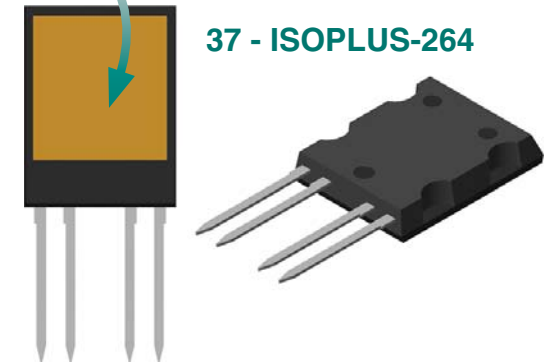

## • 1-FORM-A POWER RELAYS: SINGLE-POLE - BIDIRECTIONAL

Part Number	Relay Type	Blocking Voltage (V <sub>p</sub> )	Load Current (A <sub>rms</sub> )			On Resistance (Ω)	Input Control Current (mA)	Switching Speeds t <sub>on</sub> / t <sub>off</sub> (ms)	Isolation Voltage (V <sub>rms</sub> )	Off-State Leakage (μA)	Package Type (Page 16)	Features & Comments
			Without Heat Sink	5°C/W Heat Sink	T <sub>c</sub> =25°C							
CPC1906Y	BI	60	2	-	-	0.3	10	10 / 5	2500	1	36	
CPC1908J	BI	60	3.5	8.5	15	0.3	10	20 / 5	2500	1	29	
CPC1907B	BI	60	6	-	-	0.06	5	5 / 1	5000	1	66	Enhanced isolation voltage
CPC1909J	BI	60	6.5	15	15	0.1	10	25 / 10	2500	1	37	
CPC1916Y	BI	100	2.5	-	-	0.34	10	5 / 3	2500	1	36	
CPC1918J	BI	100	5.25	13	15	0.1	10	25 / 10	2500	1	37	
CPC1926Y	BI	250	0.7	-	-	1.4	10	10 / 10	2500	1	36	
CPC1927J	BI	250	2.7	6.7	15	0.2	10	25 / 10	2500	1	37	
CPC1973Y	BI	400	0.35	-	-	5	10	5 / 3	2500	1	36	
CPC1967J	BI	400	1.35	3.35	13.15	0.85	10	20 / 5	2500	1	29	
CPC1968J	BI	500	2	5	15	0.35	10	20 / 5	2500	1	37	
CPC1983B	BI	600	0.5	-	-	6	5	5 / 2	5000	1	66	Enhanced isolation voltage
CPC1983Y	BI	600	0.5	-	-	6	5	5 / 2	2500	1	36	
CPC1983YE	BI	600	0.5	-	-	6	5	5 / 2	4000	1	36	Enhanced isolation voltage
CPC1977J	BI	600	1.25	3.1	12.25	1	10	20 / 5	2500	1	29	
CPC1979J	BI	600	1.4	3.5	14.5	0.75	10	25 / 5	2500	1	37	
CPC1978J	BI	800	0.75	1.85	7.25	2.3	10	20 / 5	2500	1	29	
CPC1981Y	BI	1000	0.18	-	-	18	10	10 / 5	2500	1	36	
CPC1986J	BI	1000	0.65	1.6	6.5	3	10	20 / 5	2500	1	29	
CPC1988J	BI	1000	0.9	2.25	9.4	2.5	10	20 / 5	2500	1	37	

## • DUAL 1-FORM-A POWER RELAYS: BIDIRECTIONAL

CPC2907B	BI	60	2	-	-	0.15	5	2.5 / 0.25	4000	1	66	DUAL Power Relay
----------	----	----	---	---	---	------	---	------------	------	---	----	------------------

## • 1-FORM-A POWER RELAYS: SINGLE-POLE - UNIDIRECTIONAL

Part Number	Relay Type	Blocking Voltage (V <sub>p</sub> )	Load Current (A)			On Resistance (Ω)	Input Control Current (mA)	Switching Speeds t <sub>on</sub> / t <sub>off</sub> (ms)	Isolation Voltage (V <sub>rms</sub> )	Off-State Leakage (μA)	Package Type (Page 16)	Features & Comments
			Without Heat Sink	5°C/W Heat Sink	T <sub>c</sub> =25°C							
CPC1706Y	UNI	60	4	-	-	0.09	5	5 / 2	2500	1	36	
CPC1708J	UNI	60	4	11.85	24	0.08	10	20 / 5	2500	1	29	
CPC1709J	UNI	60	9	22.8	32	0.05	10	20 / 5	2500	1	37	
CPC1718J	UNI	100	6.75	17.5	32	0.075	10	20 / 5	2500	1	37	
CPC1726Y	UNI	250	1	-	-	0.75	10	5 / 2	2500	1	36	
CPC1727J	UNI	250	3.4	8.6	20	0.09	10	20 / 5	2500	1	37	
CPC1777J	UNI	600	1.5	4.6	15	0.5	10	20 / 5	2500	1	29	
CPC1779J	UNI	600	1.65	4.12	15	0.4	10	20 / 5	2500	1	37	
CPC1786J	UNI	1000	0.65	1.75	6.9	2	10	20 / 5	2500	1	29	
CPC1788J	UNI	1000	1	2.45	10.3	1.25	10	20 / 5	2500	1	37	

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

# OPTICALLY ISOLATED AC POWER SWITCHES



## • OPTICALLY ISOLATED AC POWER SWITCHES: LOAD CURRENT $\leq 1A$


- Blocking voltage from 400V<sub>p</sub> to 800V<sub>p</sub>
- SCR-based AC power switches
- Maximum load current up to 1A<sub>rms</sub>

### Features:

- Load current up to 1A<sub>rms</sub>
- Blocking voltage up to 800V<sub>p</sub>
- 5mA input sensitivity
- Zero-cross turn on  $\leq \frac{1}{2}$  Cycle
- Low EMI and RFI generation
- DC control, AC switching
- Optically isolated
- TTL and CMOS compatible
- High noise immunity
- Machine insertable, wave solderable


### Applications:

- Programmable controls
- Process control
- Power control panels
- Remote switching
- Gas pump electronics
- Large relay control circuits
- Contactors
- Solenoids
- Motor controls
- Heater controls

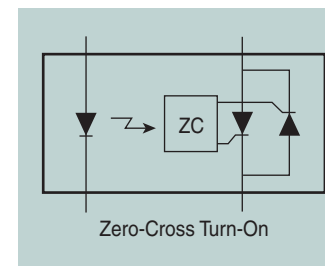

Part Number	Blocking Voltage (V <sub>p</sub> )	Load Current (A <sub>rms</sub> )	Input Control Current (mA)	Operating Frequency Min / Max (Hz)	Isolation Voltage (V <sub>rms</sub> )	Package Type
CPC1943	400	0.5	5	20 - 500	3750	15, 16
PM1204	400	0.5	5	20 - 500	3750	15, 16
CPC1945G	400	1	5	20 - 400	3750	2
CPC1945Y	400	1	5	20 - 400	3750	23
PD1201	400	1	5	20 - 500	3750	2
PS1201	400	1	5	20 - 500	3750	23
PM1205	500	0.5	5	20 - 500	3750	15, 16
PD2401	500	1	5	20 - 500	3750	2
PS2401	500	1	5	20 - 500	3750	23
CPC1961 Dual	600	0.25 <sup>1</sup>	5	20 - 500	3750	20, 22
CPC1963	600	0.5	5	20 - 500	3750	15, 16
PM1206	600	0.5	5	20 - 500	3750	15, 16
CPC1965G	600	1	5	20 - 400	3750	2
CPC1965Y	600	1	5	20 - 400	3750	23
PD2601	600	1	5	20 - 500	3750	2
PS2601	600	1	5	20 - 500	3750	23
CPC1972	800	0.25	5	20 - 500	3750	12, 14
CPC1964G	800	1	5	20 - 500	2500	2
CPC1964Y	800	1	5	20 - 500	2500	23

<sup>1</sup> Maximum continuous load current of a single pole or the sum of the load currents with both poles operating simultaneously.


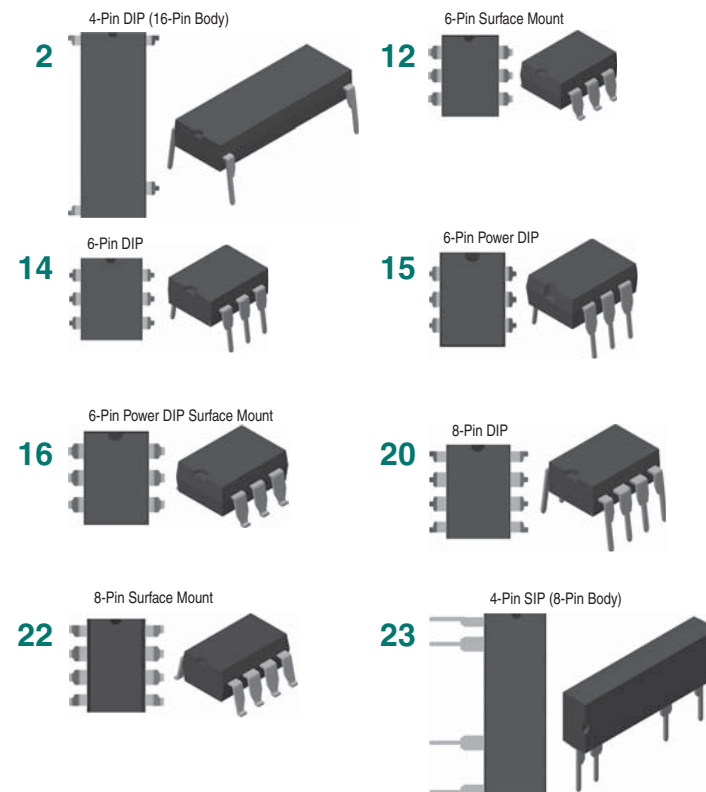


NEW!  
NEW!


## • OPTICALLY ISOLATED AC POWER SWITCHES: LOAD CURRENT >1A

- Blocking voltages of 600V<sub>p</sub> and 800V<sub>p</sub>
- SCR-based AC power switches
- Zero-cross and Rapid turn-on (non-zero-cross) versions


*Metallized, external, Direct Copper Bond (DCB) surface for heat sink applications*

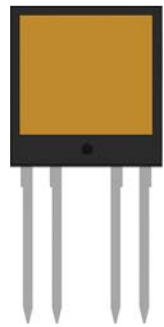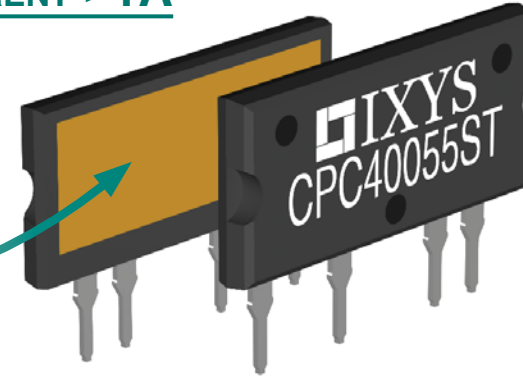


29 - i4-PAC

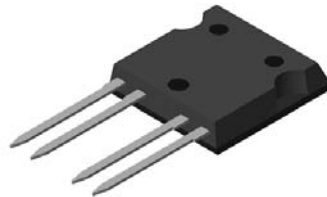


36 - Power SIP

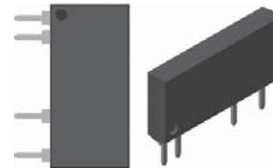

64 - SuperSIP

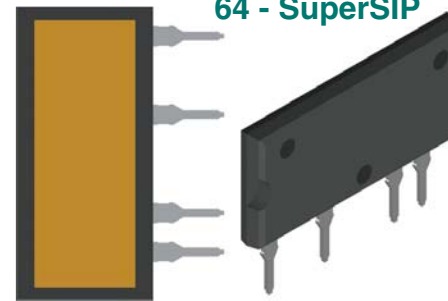

66 - Power SOIC

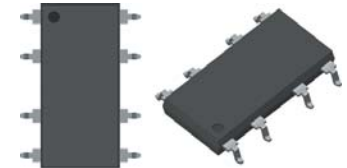

### \* Rapid turn-on (non-zero-cross)

Rapid turn-on devices turn on when the control input goes true regardless of the phase of the load voltage, and turn off when the load voltage crosses zero.

Part Number	Blocking Voltage (V <sub>p</sub> )	Load Current			Input Control Current (mA)	Input Control Voltage (V)	Operating Frequency Min / Max (Hz)	Turn-On: Zero-Cross or Rapid	Switching Speed t <sub>on</sub> / t <sub>off</sub> (max)	Isolation Voltage (V <sub>rms</sub> )	Package Type	Features
		No Heat Sink (A <sub>rms</sub> )	5°C/W Heat Sink (A <sub>rms</sub> )	T <sub>c</sub> =25°C (A <sub>rms</sub> )								
* CPC1964BX6	600	1.5	-	-	5	-	20 - 500	Rapid	500µs / ½ Cycle	5000	66	Rapid turn-on, enhanced isolation voltage
CPC1976	600	2	-	-	5	-	20 - 500	Zero-Cross	½ Cycle	3750	36	
* CPC1976YX6	600	2	-	-	5	-	20 - 500	Rapid	500µs / ½ Cycle	3750	36	Rapid turn-on
CPC1966	600	3	-	-	5	-	20 - 500	Zero-Cross	½ Cycle	3750	36	
* CPC1966YX6	600	3	-	-	5	-	20 - 500	Rapid	500µs / ½ Cycle	3750	36	Rapid turn-on
CPC1964B	800	1.5	-	-	5	-	20 - 500	Zero-Cross	½ Cycle	5000	66	Enhanced isolation voltage, 12.5mm creepage
CPC1966B	800	3	-	-	5	-	20 - 500	Zero-Cross	½ Cycle	5000	66	Enhanced isolation voltage, 12.5mm creepage
* CPC1966BX8	800	3	-	-	5	-	20 - 500	Rapid	**45µs / ½ Cycle	3750	66	Rapid turn-on, 12.5mm creepage
* CPC1966YX8	800	3	-	-	5	-	20 - 500	Rapid	**45µs / ½ Cycle	3750	36	Rapid turn-on
CPC1998J	800	5	20	50	5	-	20 - 500	Zero-Cross	½ Cycle	2500	29	High load current
CPC40055ST	800	5	20	40	5	-	20 - 500	Zero-Cross	½ Cycle	2500	64	High load current, 9.5mm creepage
CPC44055ST	800	5	20	40	-	9 - 16	20 - 500	Zero-Cross	½ Cycle	2500	64	High load current, 9.5mm creepage

\*\* Typical turn-on values.

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)



# MULTIFUNCTION PRODUCTS: SSR/OPTOCOUPLEDERS

## GENERAL PURPOSE MULTIFUNCTION PRODUCTS (TELECOM MULTIFUNCTION PRODUCTS - PAGE 43)



The OptoMOS line of Multifunction Products combines a number of discrete, optically isolated functions into a single package. These products mix and match solid state relays, optocouplers, and Darlington transistors to create highly functional circuits in a single, small package. Multifunction devices allow designers to consolidate circuit functions into a single device, thus freeing up valuable board space and reducing component count.

### Features:

- 3750V<sub>rms</sub> input-to-output isolation
- Multiple functionality in a single package
- Current limiting (part numbers with "L" suffix)
- Machine insertable, wave solderable
- TTL and CMOS compatible

### Applications:

- Telecommunication/datacommunication
- Instrumentation
- I/O subsystems/electronic switching
- Medical equipment (patient/equipment isolation)
- Security
- Aerospace
- Industrial controls

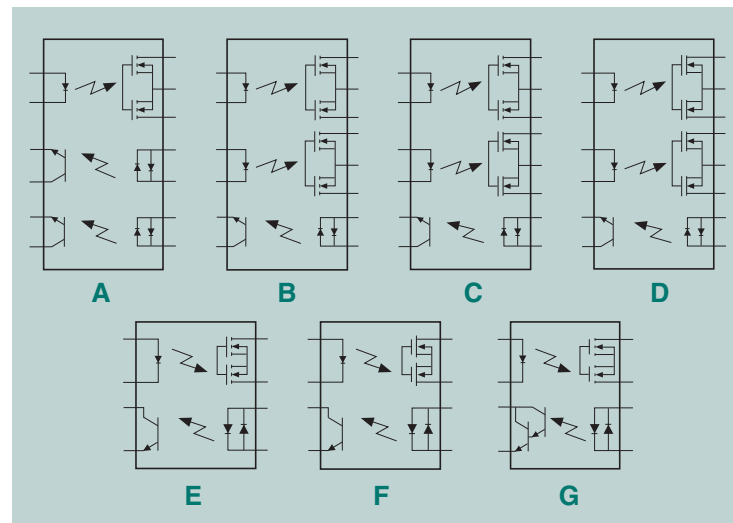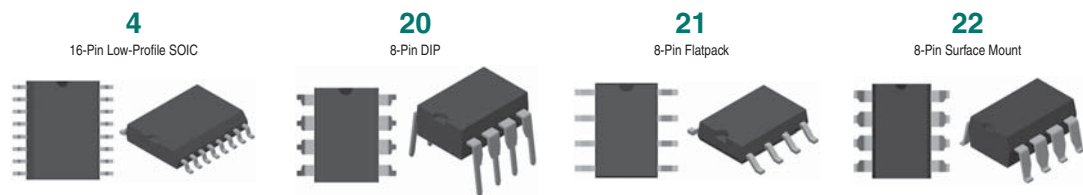

Part Number	Style	SSR Characteristics				Optocoupler Characteristics				Isolation Voltage (V <sub>rms</sub> )	Package Type	Features and Comments
		Blocking Voltage (V <sub>p</sub> )	Current Handling (mA)	On Resistance (Ω)	Input Control Current (mA)	Breakdown Voltage (V)	Current Transfer Ratio (%)	Saturation Voltage (V)	Input Control Current (mA)			
IAA110	B	350	100	35	5	20	33	0.5	6	3750	4	Two 1-Form-A relays, one optocoupler
IAB110	C	350	100	35	5	20	33	0.5	6	3750	4	One 1-Form-A relay, one 1-Form-B relay, one optocoupler
IAD110	A	350	100	35	5	20	33	0.5	6	3750	4	One 1-Form-A relay, two optocouplers
IBB110	D	350	100	35	5	20	33	0.5	6	3750	4	Two 1-Form-B relays, one optocoupler
XS170	E	350	100	50	2	20	33	0.5	6	3750	20, 22	One 1-Form-A relay, one optocoupler
TS117	E	350	120	35	2	20	33	0.5	6	3750	20, 21, 22	One 1-Form-A relay, one optocoupler
TS117L	E	350	120	35	2	20	33	0.5	6	3750	20, 21, 22	One current-limiting 1-Form-A relay, one optocoupler
TS118	F	350	120	35	5	20	33	0.5	6	3750	20, 21, 22	One 1-Form-B relay, one optocoupler
TS120	G	350	120	35	5	20	300	0.8	2	3750	20, 21, 22	One 1-Form-A relay, one darlington optocoupler
TS190	E	400	150	22	5	20	33	0.5	6	3750	20, 21, 22	One 1-Form-A relay, one optocoupler
TS190L	E	400	150	25	5	20	33	0.5	6	3750	21	One current-limiting 1-Form-A relay, one optocoupler


For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

IXYS Integrated Circuits Division – 78 Cherry Hill Drive – Beverly, MA USA 01915 – [www.ixysic.com](http://www.ixysic.com)

# FIELD EFFECT TRANSISTORS

## • N-CHANNEL DEPLETION MODE FETs

- Normally on MOSFETs present low resistance with no power applied
- Ideal for security applications
- IGBT speed enhancement
- LED drivers

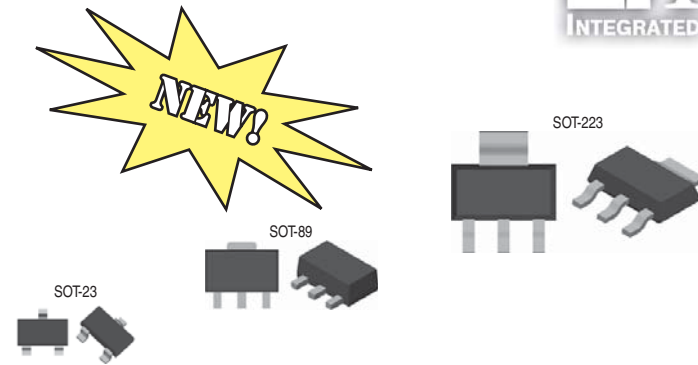

Part Number	$V_{(BR)DSX}$	$I_D$	$R_{DS(on)}$	$V_{GS(off)}$	$V_{GS(off)}$	Package Type	Features & Comments
	(V)	Min (mA)	Max ( $\Omega$ )	Min (V)	Max (V)		
CPC3701	60	600	1	-1.4	-3.1	SOT-89	
CPC3710	250	220	10	-1.6	-3.9	SOT-89	
CPC3703	250	360	4	-1.6	-3.9	SOT-89	
<b>NEW!</b> CPC3902	250	400	2.5	-1.4	-3.1	SOT-89, SOT-223	
CPC3708	350	130	14	-2	-3.6	SOT-89, SOT-223	
CPC3720	350	130	22	-1.6	-3.9	SOT-89	
CPC5602	350	130	14	-2	-3.6	SOT-223	Designed for use with LITELINK designs
CPC3730	350	140	35	-1.6	-3.9	SOT-89	
CPC3714	350	240	14	-1.6	-3.9	SOT-89	
<b>NEW!</b> CPC3909	400	300	6	-1.4	-3.1	SOT-89, SOT-223	
CPC5603	415	130	14	-2	-3.6	SOT-223	Designed for use with LITELINK designs
<b>NEW!</b> CPC3960	600	100	44	-1.4	-3.1	SOT-223	
<b>NEW!</b> CPC3982	800	20	380	-1.4	-3.1	SOT-23	Very small package
<b>NEW!</b> CPC3980	800	100	45	-1.4	-3.1	SOT-223	


### Features:

- Normally on depletion mode devices offer low  $R_{DS(on)}$  at cold temperatures
- Low on-resistance
- High input impedance
- Low  $V_{GS(off)}$  voltage

### Applications:

- Power fail switches
- Discrete normally closed relays
- Constant current, high brightness LED drivers
- High voltage pre-regulators
- Power inverters
- Power supplies

### N-Channel Depletion Mode MOSFET as Pre-Regulator

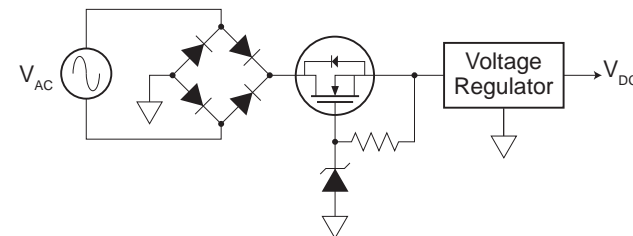

See Application Note AN-500  
 “Depletion-Mode Power MOSFETs and Applications”

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

# IGBT & MOSFET GATE DRIVERS

**NEW!**  
IXD\_604SI & SIA, IXD\_609SI, and IXD\_614SI  
are AEC-Q100 qualified!

## • Low-SIDE GATE DRIVERS

Part Number	Output Type	$I_{PEAK}$ $T_C=25^\circ C$ (A <sub>p</sub> )	Output Resistance (Ω)	Available Logic Configurations	Enable Function	Under-voltage Lockout (V)	Package Type
IXD_630	SINGLE	30	0.4	I, N, D	•	$V_{CC} \leq 12.5$	57, 58
IXD_630M	SINGLE	30	0.4	I, N, D	•	$V_{CC} \leq 9$	57, 58
IXD_614	SINGLE	14	0.8	I, N, D	•	-	20, 53, 57, 58
IXD_609	SINGLE	9	1	I, N, D	•	-	20, 53, 54, 56, 57, 58
IXD_604	DUAL	4	2.5	F, I, N, D	•	-	20, 53, 54, 56
IX4423	DUAL	3	4	I	-	-	54
IX4424	DUAL	3	4	N	-	-	54
IX4424G	DUAL	3	4	N	-	-	20
IX4425	DUAL	3	4	F	-	-	54
IXD_602	DUAL	2	4	F, I, N	-	-	20, 53, 54, 56
IX4426	DUAL	1.5	8	I	-	-	54, 56
IX4427	DUAL	1.5	8	N	-	-	54, 56
IX4428	DUAL	1.5	8	F	-	-	54, 56

### Features:


- 1.5A to 30A peak source/sink drive current
- Wide operating voltage range: 4.5V to 35V
- -40°C to +125°C extended operating temperature range
- Logic input withstands negative swing of up to -5V
- Matched rise and fall times
- Low propagation delay time
- Low 10μA supply current
- Low output impedance

### Applications:


- Efficient power MOSFET and IGBT switching
- Switch mode power supplies
- Motor controls
- DC to DC converters
- Class-D switching amplifiers
- Pulse transformer driver

## AEC-Q100 Qualified Low-Side Gate Drivers


Part Number	Output Type	$I_{PEAK}$ $T_C=25^\circ C$ (A <sub>p</sub> )	Output Resistance (Ω)	Available Logic Configurations	Enable Function	Package Type
IXD_614SI	SINGLE	14	0.8	I, N, D	•	53
IXD_609SI	SINGLE	9	1	I, N, D	•	53
IXD_604SI	DUAL	4	2.5	F, I, N, D	•	53
IXD_604SIA	DUAL	4	2.5	F, I, N, D	•	54




**F**







**I**




**N**




**D**

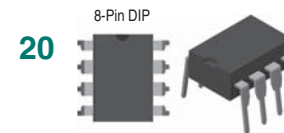

20

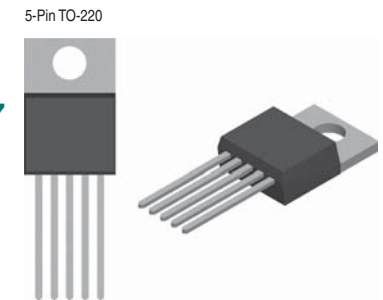

57




53



54



56

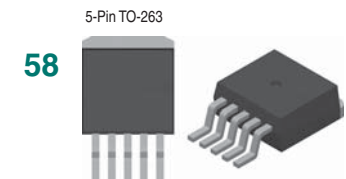


58

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

## • 600V HIGH-SIDE & LOW-SIDE GATE DRIVER: IX2113

- High-side channel can drive an N-channel power MOSFET or IGBT 600V from the common reference
- Configured with independent high-side and low-side referenced output channels

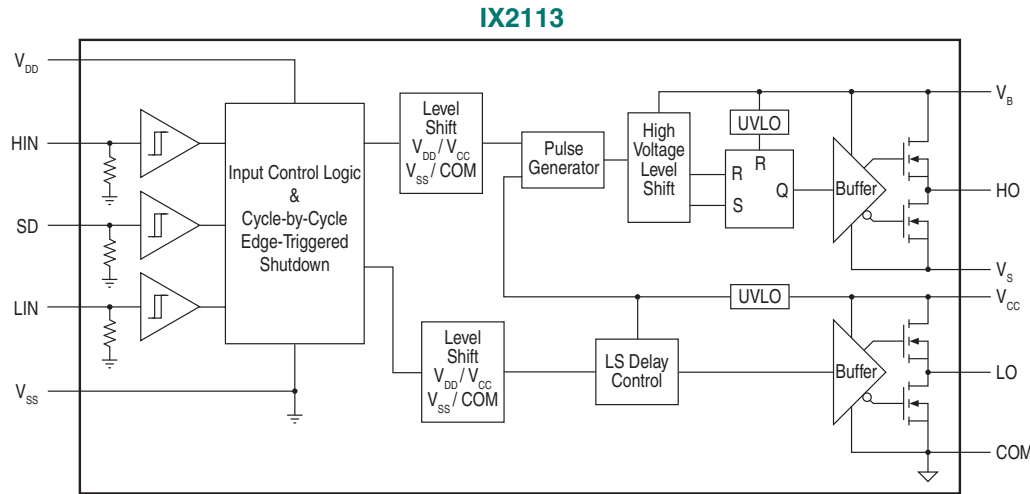

### Features:

- Floating channel for bootstrap operation up to 600V with an absolute maximum rating of 700V
- Outputs capable of sourcing and sinking 2A
- Gate drive supply range from 10V to 20V
- Tolerant to negative voltage transients: dV/dt immune
- 3.3V logic compatible
- Under-voltage lockout for both high-side and low-side outputs
- Matched propagation delays



## • HIGH VOLTAGE HALF-BRIDGE GATE DRIVER: IX21844

- Programmable dead-time can be set between 400ns and 5ms
- Floating high-side channel can drive an N-channel power MOSFET or IGBT 600V from the common reference

### Features:


- Floating channel for bootstrap operation to 600V with an absolute maximum rating of 700V
- Outputs can source 1.4A and sink 1.8A
- Gate drive supply range from 10V to 20V
- Tolerant to negative voltage transients: dV/dt immune
- 3.3V and 5V logic compatible
- Under-voltage lockout for both high-side and low-side outputs
- Matched propagation delays

### Applications:

- Switch mode power supplies
- Motor driver inverters
- DC/DC converters
- Uninterruptable power supplies (UPS)



### IX21844 Typical Application

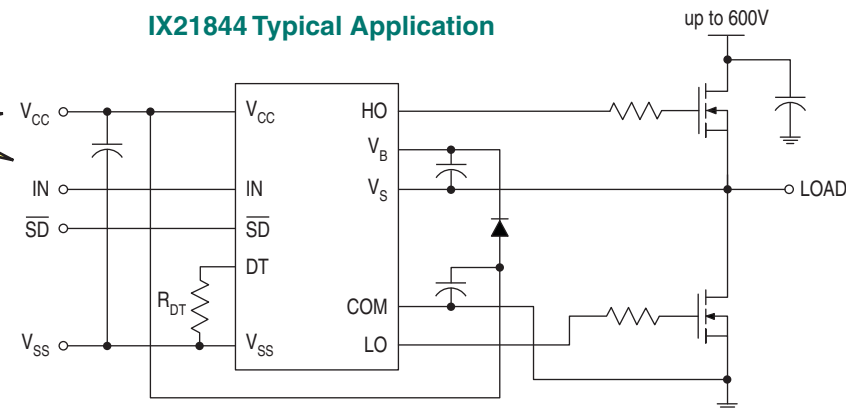



## • 1200V HIGH AND LOW SIDE GATE DRIVER: IX2120


- Floating Channel for Bootstrap Operation to +1200V
- Outputs Capable of Sourcing and Sinking 2A

### Features:

- Gate Drive Supply Range From 15V to 20V
- Enhanced Robustness due to SOI Process
- Tolerant to Negative Voltage Transients: dV/dt Immune
- 3.3V Logic Compatible
- Undervoltage Lockout for Both High-Side and Low-Side Outputs



IX2120 Functional Block Diagram

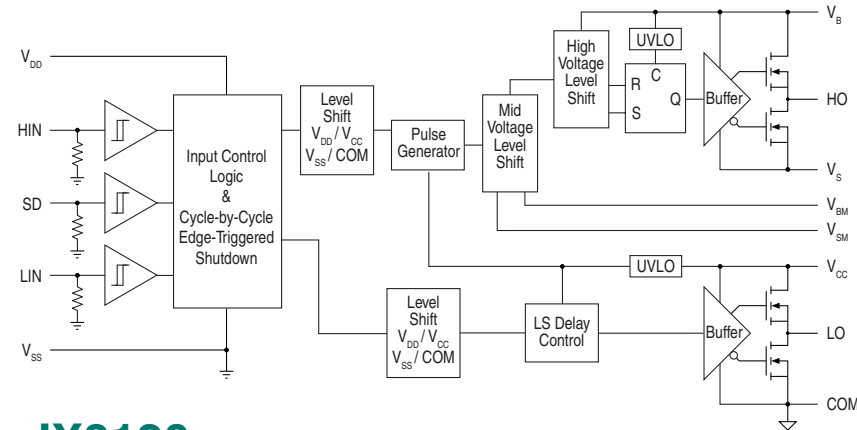

## • 2.5A OUTPUT OPTICALLY COUPLED GATE DRIVER: IX3120

- 2.5A maximum peak output current
- Wide operating voltage range: 15V to 30V

### Features:

- 25kV/μs minimum common-mode rejection (CMR) at 1500V<sub>CM</sub>
- Under-voltage lockout with hysteresis
- 3750V<sub>rms</sub> input-to-output isolation
- Wide temperature range: -40°C to +100°C


### Applications:

- Isolated IGBT/MOSFET gate drive
- Switch mode power supplies
- Industrial inverters
- Motor drivers

Ideally suited for use in motor control and inverter applications due to its low input LED current, high output peak current, and high noise immunity (25kV/μs).



IX3120

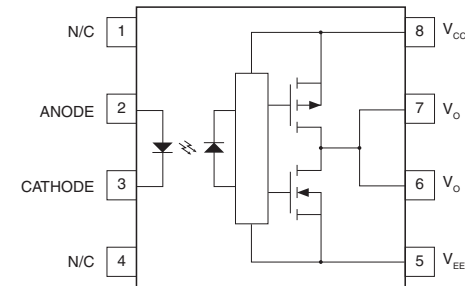

## • 2.5A OUTPUT HI SPEED GATE DRIVER OPTOCOPLER: IX3180

- 2.5A maximum peak output current
- Wide operating voltage range: 10V to 20V

### Features:


- 200ns maximum propagation delay over temperature range
- 20ns typical pulse width distortion
- 10kV/μs minimum common-mode rejection (CMR) at 1500V<sub>CM</sub>
- Wide operating voltage range: 10V to 20V
- Under-voltage lockout with hysteresis
- 3750V<sub>rms</sub> input-to-output isolation
- Wide temperature range: -40°C to +100°C

### Applications:

- High performance DC/DC converters
- High performance switching power supplies
- Motor control inverter applications
- Motor drivers



IX3180

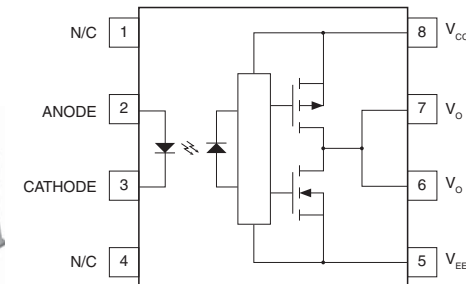


For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

## • OPTICALLY ISOLATED LOAD-BIASED GATE DRIVERS

- High speed, optically isolated gate driver ICs
- Output driver powered from load voltage; no external power supply required
- On-chip circuitry charges an external capacitor whose charge enables fast turn-on

CPC1590 Application Diagram

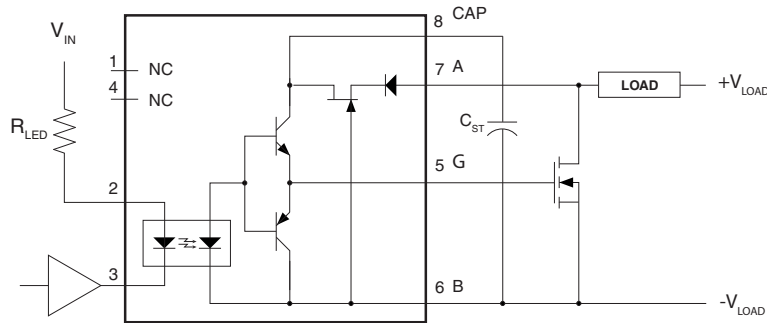


### Features:

- No external IC power supply
- Low drive power requirements (TTL/CMOS compatible)
- Load voltages up to 200V
- Fast switching times - 40μsec on, 400μsec off

### Applications:


- Instrumentation
- Multiplexers
- I/O subsystems
- Meters (Watt-Hour, water, gas)
- Medical equipment (patient/equipment isolation)
- Security
- Aerospace
- Industrial controls

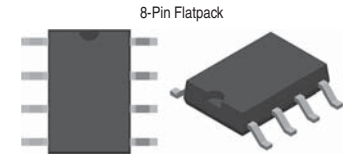

Part Number	Input Control Current (mA)	Gate Voltage @ I <sub>F</sub> =5mA (V <sub>G</sub> )	Blocking Voltage (V <sub>P</sub> )	Regulated Capacitor Voltage (V <sub>CAP-MAX</sub> )	Switching Speeds t <sub>on</sub> / t <sub>off</sub> (μs)	Isolation Voltage (V <sub>rms</sub> )
CPC1580	2.5	7.5 - 12	65	V <sub>DS</sub> - 0.2V	40 / 400	3750
CPC1590	2.5	7.5 - 12	200	16	40 / 400	3750

## • OPTICALLY ISOLATED PHOTOVOLTAIC GATE DRIVERS

- Dual optically isolated photovoltaic devices
- Well suited for use in discrete solid state relay designs


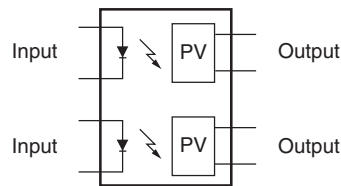


### Features:

- Isolated 5.5V to 12V photovoltaic output
- Floating outputs for parallel or series configuration

### Applications:

- MOSFET driver
- Isolated floating power source



Part Number	Input Control Current (mA)	Nominal Open-Circuit Voltage V <sub>OC</sub> (V)	Nominal Short-Circuit Current I <sub>SC</sub> (μA)	Switching Speeds t <sub>on</sub> / t <sub>off</sub> (ms)	Isolation Voltage (V <sub>rms</sub> )	Package Type
FDA215	5	5.5	2.5	5 / 5	3750	8-pin DIP, 8-pin surface mount
FDA217	5	11.75	4.5	2 / 0.5	3750	8-pin DIP, 8-pin surface mount

NEW!

# High Voltage Products

## High Voltage Analog Switch Arrays






### Features:

- Flexible high voltage supplies up to  $V_{pp} - V_{NN}=200V$
- Output switch on-resistance typically  $20\Omega$
- Low charge injection, low capacitance analog switches
- Very low quiescent current: 30nA typical
- -58dB off-isolation at 5MHz
- Internal bleed resistors: CPC7232 & CPC7701

### Applications:

- Piezoelectric transducer drivers
- Ultrasound imaging
- Printers
- Industrial controls and measurement

Part Number	Number of Channels	Channel On-Resistance ( $\Omega$ )	Bleed Resistors ( $k\Omega$ )	Clock Frequency (MHz)	Turn-On Time ( $\mu s$ )	Turn-Off Time ( $\mu s$ )	Package Type
CPC7220	8	20	-	5	5	5	50, 51
CPC7232	8	21	20 - 50	5	5	5	50, 51
CPC7601	16	25	-	8	5	5	50
CPC7701	16	25	20 - 50	8	5	5	50

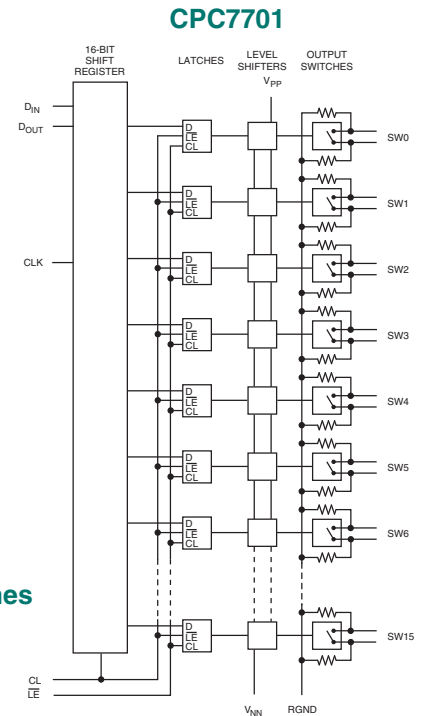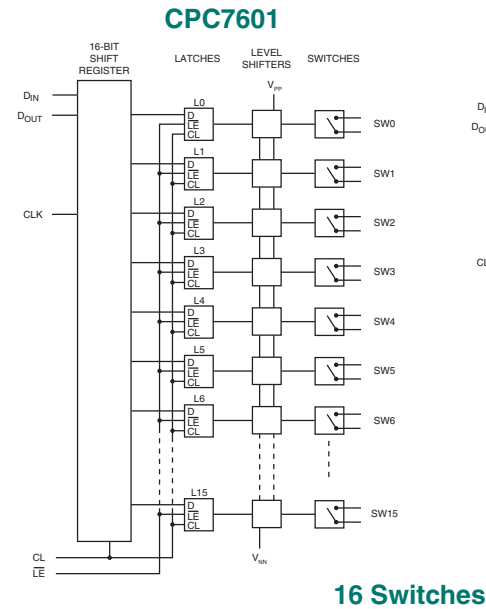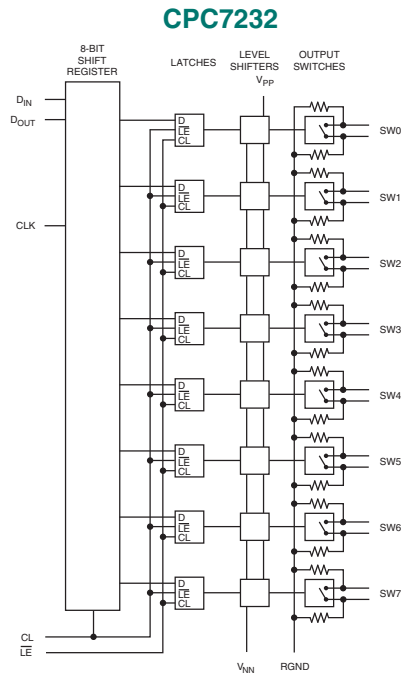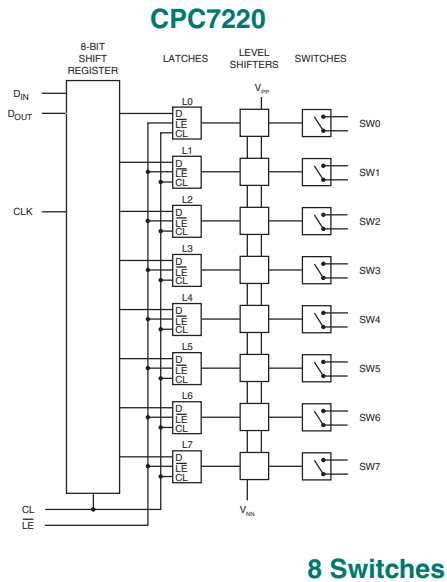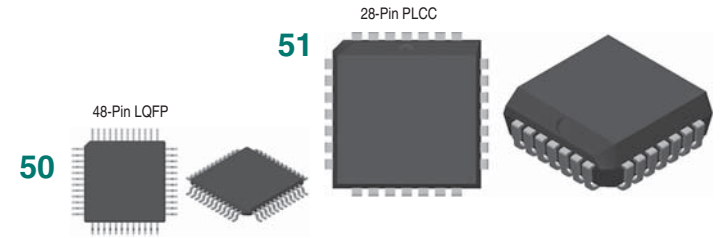

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)



# • HIGH VOLTAGE ISOLATED ANALOG SWITCHES



## CPC7524: 600V Quad High Voltage Isolated Analog Switch Array

- Provides flexible single-ended or differential access to high voltage networks
- Configured as two sets of matched, paired switches for improved differential performance


### Features:

- Switch voltage up to 600V
- 110dB switch-to-switch isolation at 5kHz
- Flexible switch configurations
- Smart logic for power-up/hot-plug state control
- 3.3V operation with very low power consumption
- Switch current limiting and thermal shutdown protect against fault conditions
- TTL logic-level Inputs
- Input latch
- Matched  $R_{ON}$
- Clean, bounce-free switching
- Monolithic IC reliability
- 28-pin SOIC package

### Applications:

- Instrumentation
- Industrial controls and monitoring
- Automatic test equipment (ATE)
- Battery monitoring and charging circuits
- Worldwide AC mains monitor

**3.3V Supply!**

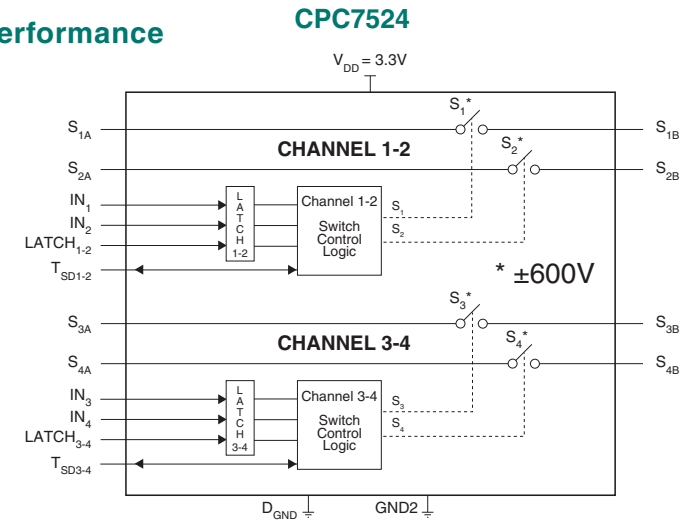

## CPC7514: 320V Quad High Voltage Isolated Analog Switch Array

- Provides single-ended or differential access to high voltage networks
- Self-biasing - no external high-voltage supplies required



### Features:

- Low, matched  $R_{ON}$
- Switch voltage up to  $\pm 320V$
- 320V logic-input-to-switch-output isolation
- 110dB switch-to-switch isolation at 5kHz
- Flexible switch configurations
- Smart logic for power-up/hot-plug state control
- 3.3V operation with very low power consumption
- Switch current limiting protects against fault conditions
- Thermal shutdown protects against fault conditions
- Latched TTL logic level inputs
- Clean, bounce-free switching
- Monolithic IC reliability

### Applications:

- Instrumentation
- Industrial controls and monitoring
- Automatic test equipment (ATE)
- Battery charging circuits
- Telephony
  - VoIP gateways
  - Central office (CO) and remote terminal (RT)
  - Concentrators
  - PBX systems
- Optical network terminals (ONT)
- Optical network units (ONU)
- Hybrid fiber coax (HFC)

**3.3V Supply!**

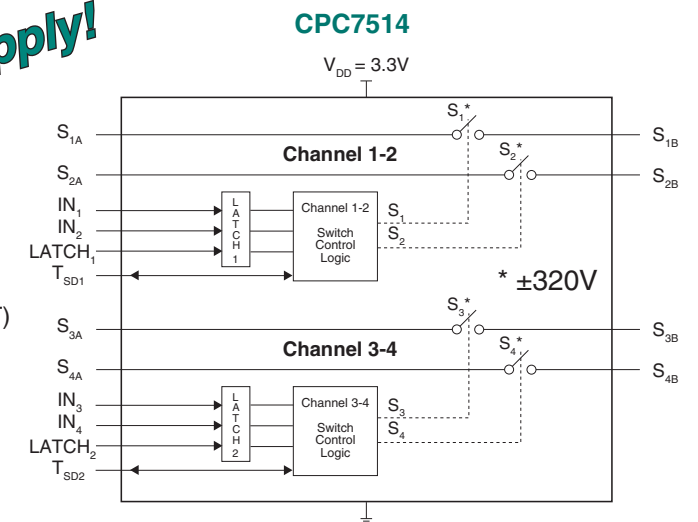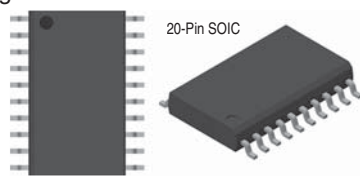

High Voltage Products

## CPC7512: 320V Dual Shunt-Isolated High Voltage High Frequency Analog Switch


- Provides single-ended or differential access to high voltage networks
- Self-biasing - no external high-voltage supplies required

### Features:


- Low, matched  $R_{ON}$
- Guaranteed break-before-make (BBM)
- Switch voltage up to  $\pm 320V$
- 60dB off-isolation at 1MHz
- Smart logic for power-up/hot-plug state control
- 5V operation with very low power consumption
- Thermal shutdown protects against fault conditions
- Latched TTL logic level inputs

### Applications:



- Instrumentation
- Industrial controls and monitoring
- Multiplexed ultrasonic transducer switching
- Automatic test equipment (ATE)
- Battery monitoring and charging

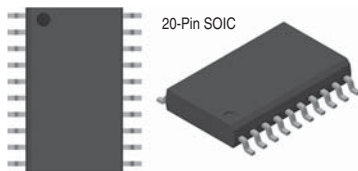


$$\text{Insertion Loss} = +20 \log \frac{V_s}{V_M}$$

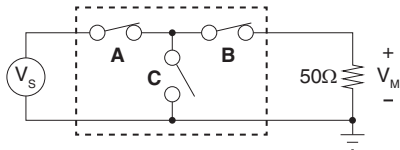


$$\text{Open Circuit} = +20 \log \frac{V_M}{V_s}$$

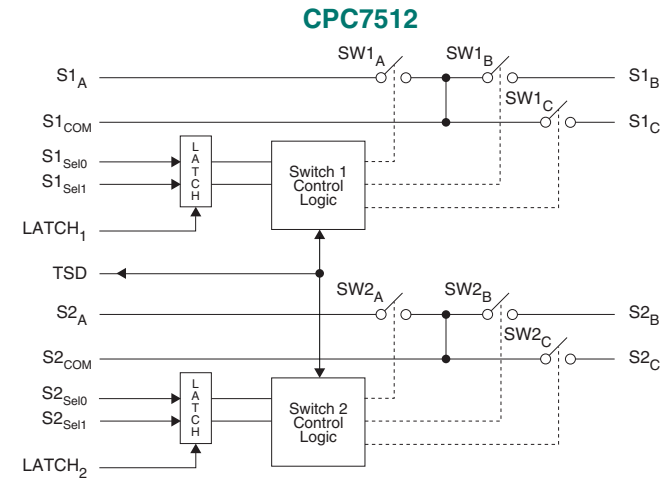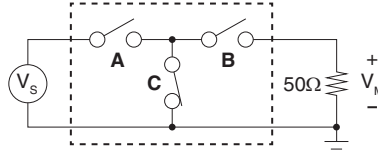


$$\text{Crosstalk} = +20 \log \frac{V_M}{V_s}$$

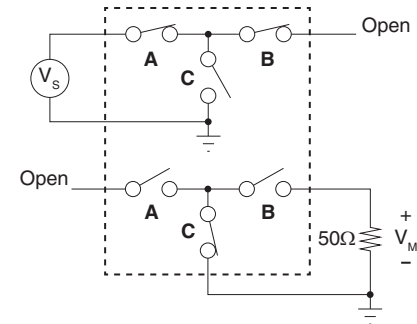


Insertion Loss Into 50Ω

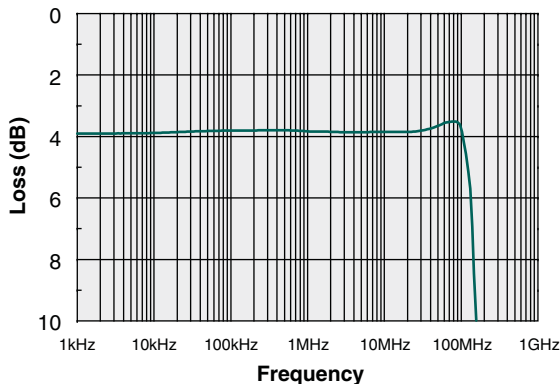

Open Circuit Transfer Gain into 50Ω

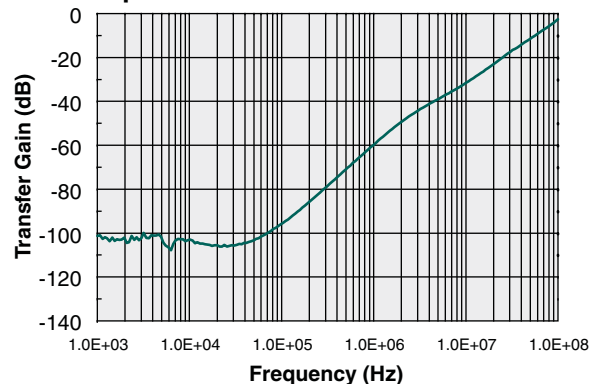

Cross Talk into 50Ω

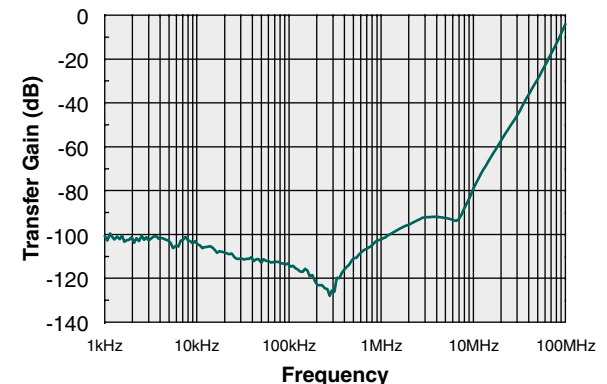

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

# High Speed Digital Optical Isolators

## OPTICALLY ISOLATED I<sup>2</sup>C BUS REPEATERS: CPC5902 & CPC5903

See Application Note TB-101  
"Optically Isolating an I<sup>2</sup>C Interface"

- CPC5902 bidirectionally buffers clock and data signals
- CPC5903 bidirectionally buffers data signal, unidirectionally buffers clock signal
- Logic level translation for levels as low as 2.7V or as high as 5.5V
- Passes DC signals - no refresh clock needed - no clock noise generated

### CPC5902 Features:

- Bidirectionally buffers both I<sup>2</sup>C signals
- Extends and isolates I<sup>2</sup>C interfaces
- Supports standard and fast mode I<sup>2</sup>C (400kbps)
- Side B fast-mode compliant:  $V_{DDB} > 4.5V$
- Supports I<sup>2</sup>C clock stretching
- Operates on 2.7V to 5.5V
- Supports DC logic level buffering without refresh
- Glitch-free operation
- Power down to Hi-Z does not load I<sup>2</sup>C bus
- Slew-limited drivers reduce EMI



### CPC5903 Features:

- Bidirectionally buffers SDA I<sup>2</sup>C signal
- Side A extends and isolates I<sup>2</sup>C interfaces
- Standard-mode and fast-mode I<sup>2</sup>C
- Side B fast-mode compliant:  $V_{DDB} > 4.5V$
- Operates on 2.7V to 5.5V
- No internal clock - low EM & RF generation
- Voltage level translation
- Slew-limited drivers reduce EMI
- Power down to Hi-Z does not load I<sup>2</sup>C bus
- 3750V<sub>rms</sub> galvanic isolation

### Applications:



- Power-over-Ethernet (POE)
- I<sup>2</sup>C bus length extender
- Isolated control and signal monitoring
- Power supply high-side interface
- I<sup>2</sup>C logic level translation

CPC5902

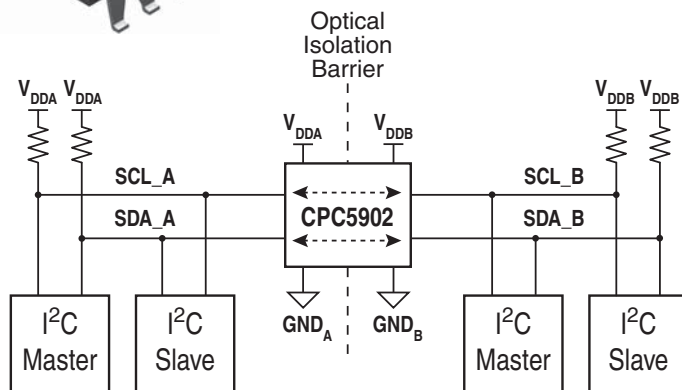


- No internal clock - minimal EM & RF emissions
- Immune to external EMI and RFI
- High voltage isolation

CPC5903

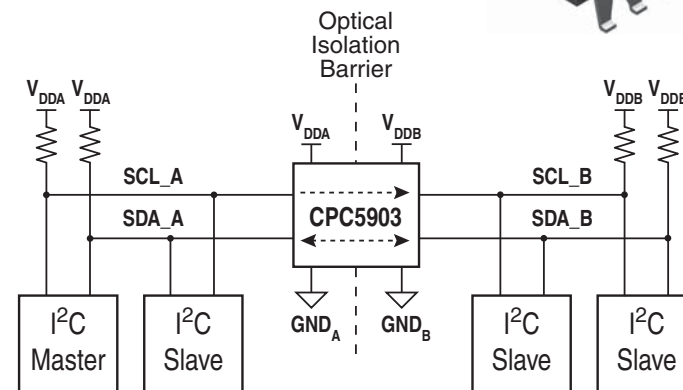

## • SINGLE-CHANNEL EACH DIRECTION DIGITAL OPTICAL ISOLATOR: CPC5001

- Logic level translation for levels as low as 2.7V or as high as 5.5V
- Passes DC signals - no refresh clock needed

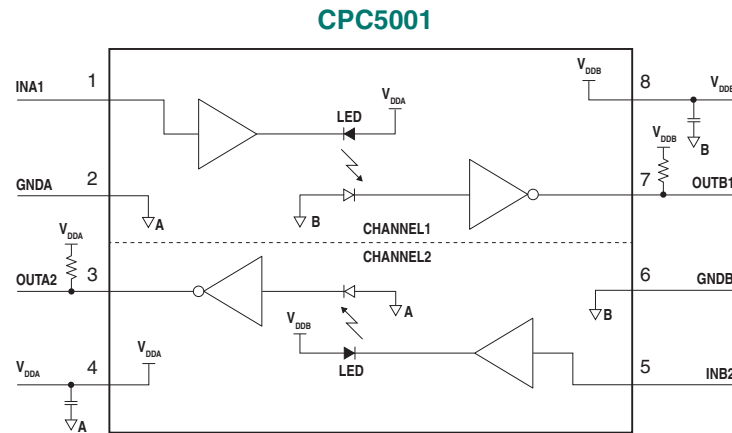


### Features:

- Isolates one signal in each direction
- Operates from 2.7V to 5.5V
- Buffered inputs - no external LED drive required
- Hysteresis at inputs for noise rejection
- Slew-limited drivers reduce EMI
- 3750V<sub>rms</sub> galvanic isolation from input to output
- Power down to Hi-Z Does Not Load Outputs
- 5Mbaud data rate

### Applications:

- Isolated signal monitoring and control
- Power-over-Ethernet, POE
- Power supply high-side interface
- Logic level translation
- Microprocessor system interface
- Inter integrated circuit (I<sup>2</sup>C) interface
- Serial peripheral interface
- Full duplex communication
- Isolated line receiver
- Isolated data acquisition systems



## • DUAL HIGH SPEED DIGITAL OPTICAL ISOLATOR: CPC5002

- 3750V<sub>rms</sub> galvanic isolation from input to output
- Passes DC signals - no refresh clock needed

### Features:


- Dual optics isolate two signals
- Operates over 2.7V < V<sub>DD</sub> < 5.5V
- Power down to Hi-Z does not load outputs
- Low-power CMOS reduces supply current
- LED drive current only 1.5mA
- High speed: 10Mbaud typical

### Applications:

- Isolated line receiver
- Ground loop elimination
- ADC/DAC digital noise isolation
- 4-wire I<sup>2</sup>C bus isolation



**10 Mbaud!**

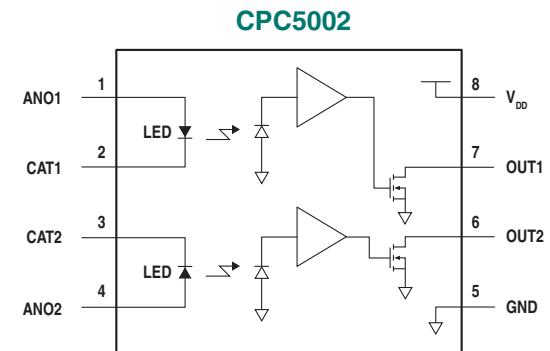

# OPTOCOUPLERS

## • SINGLE & DUAL OPTOCOUPLERS


- Single-transistor output or Darlington transistor output for higher current gain
- Single-LED for unidirectional input signal or dual-LED input for bidirectional input signal
- Input-to-output isolation:  $1500V_{rms}$ ,  $3750V_{rms}$ , or  $5000V_{rms}$

### Features:


- AC and DC compatible inputs
- Machine insertable, wave solderable

### Applications:

- Modem switching (laptops, notebooks, PDAs)
- Voltage detection
- TIP/RING circuits
- Ringing detection
- Loop detection
- Current sensing
- Telecom switching

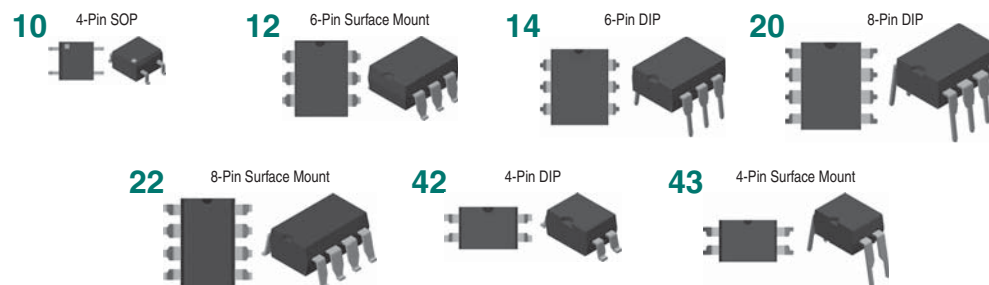

Part Number	Minimum Breakdown Voltage ( $BV_{CEO}$ )	Typical Current Transfer Ratio (%)	Maximum Saturation Voltage (V)	Input Control Current (mA)	Minimum Isolation Voltage ( $V_{rms}$ )	Package Type	Configuration
LDA100	30	300	0.5	1	3750	12, 14	E
LDA101	30	300	0.5	1	3750	12, 14	C
LDA200	30	300	0.5	1	3750	20, 22	L
LDA201	30	300	0.5	1	3750	20, 22	K
LDA202	30	300	0.5	1	3750	20, 22	H
LDA203	30	300	0.5	1	3750	20, 22	G
CPC1001N	30	330	0.3	0.2	1500	10	A
LDA102	30	350	0.5	1	3750	12, 14	C
CPC1303	30	1000	0.5	0.2	5000	42, 43	A
LDA110	30	8500	1	1	3750	12, 14	F
LDA111	30	8500	1	1	3750	12, 14	D
LDA210	30	8500	1	1	3750	20, 22	N
LDA211	30	8500	1	1	3750	20, 22	M
LDA212	30	8500	1	1	3750	20, 22	J
LDA213	30	8500	1	1	3750	20, 22	I
CPC1301	350	5500	1.2	1	5000	42, 43	B
CPC1302	350	5500	1.2	1	3750	20, 22	I

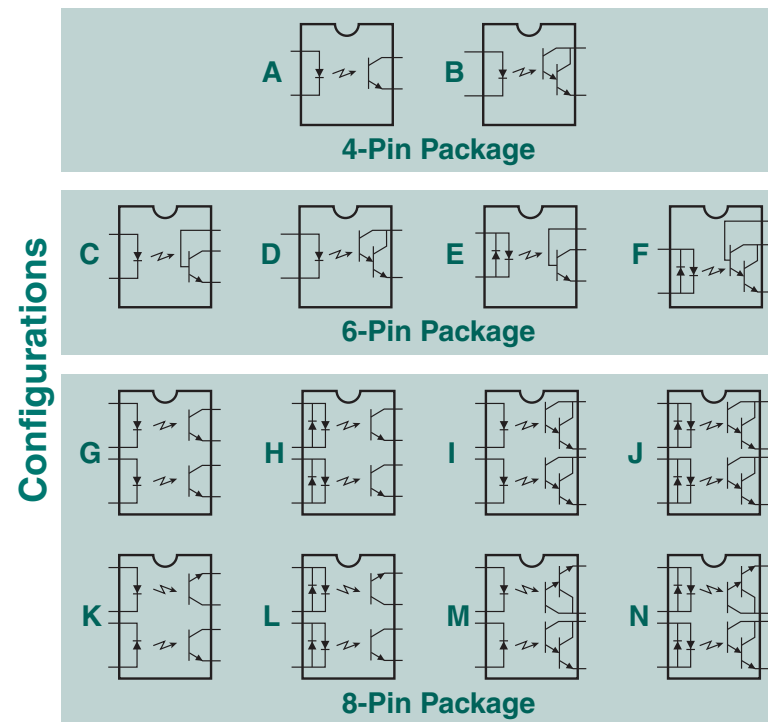

## • LINEAR OPTOCOUPLERS

- Input LED drives two photodiodes: (1) isolated output (2) feedback to correct for the input LED's non-linearity



### Features:

- Couples analog & digital signals
- 3750V<sub>rms</sub> input-to-output isolation
- Bandwidth >200kHz in photoconductive mode
- Bandwidth 40kHz in photovoltaic mode
- High gain stability
- Low input-to-output capacitance
- Low power consumption
- 0.01% servo linearity
- THD 87dB typical
- Machine insertable, wave solderable

### Applications:

- Power supply feedback/current
- Medical sensor interfacing
- Isolation of process control transducers
- Isolated 4-20mA converters
- Digital telephone isolation

Part Number	Servo Gain $K1=I_1/I_F$ (Min - Max)	Forward Gain $K2=I_2/I_F$ (Min - Max)	Transfer Gain $K3=K_2/K_1$ (Min - Max)	Input Control Current (mA)	Isolation Voltage (V <sub>rms</sub> )	Package Type
LOC110	0.004 - 0.03	0.004 - 0.03	0.668 - 1.179	2 - 10	3750	20, 21, 22
LOC111	0.008 - 0.03	0.006 - 0.03	0.733 - 1.072	2 - 10	3750	20, 21, 22
LOC112	0.004 - 0.03	0.004 - 0.03	0.733 - 1.072	2 - 10	3750	20, 21, 22
LOC117	0.008 - 0.03	0.006 - 0.03	0.887 - 1.072	2 - 10	3750	20, 21, 22
LOC210	0.004 - 0.03	0.004 - 0.03	0.773 - 1.072	2 - 10	3750	4
LOC211	0.008 - 0.03	0.006 - 0.03	0.773 - 1.072	2 - 10	3750	4

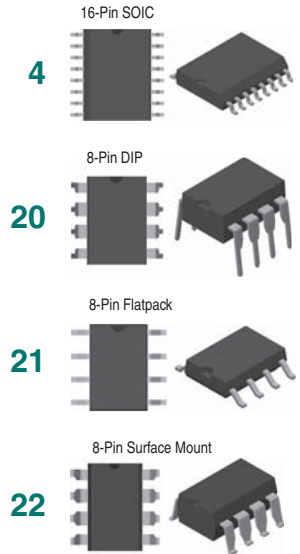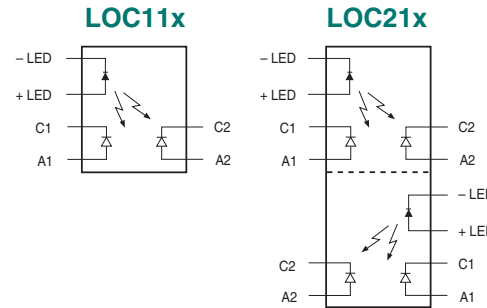

## Two Fundamental Operating Configurations:


### Photoconductive Mode:

- Wide bandwidth (>200kHz)
- 8-bit linearity

### Photovoltaic Mode:

- 14-bit linearity
- 40kHz bandwidth

## Isolation Amplifier (Photovoltaic Mode)

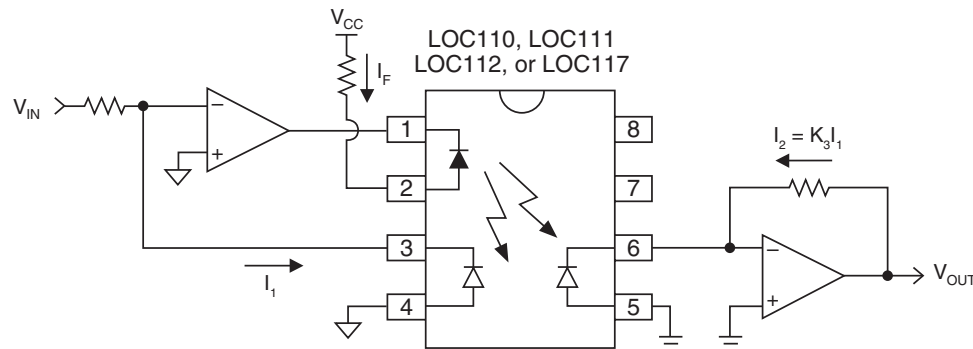

## • OPTICALLY ISOLATED ERROR AMPLIFIERS


### Features:

- Low voltage operation:
  - 1.6V: LIA135 & LIA136
  - 2.7V: LIA120 & LIA130
- Optocoupler, precision reference, and error amplifier in a single package
- LIA120: 70dB linearity typical

### Application:


- SMPS feedback loops
- Power supply feedback

**Low 1.6V Operation!**  
LIA135 and LIA136

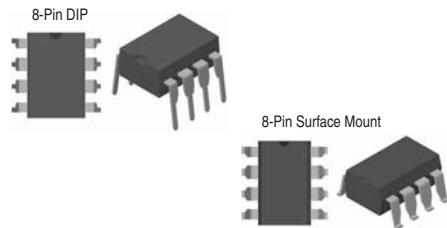


**NEW!**  
**NEW!**


### Optical Feedback for Ultra-Low-Voltage Power Supplies

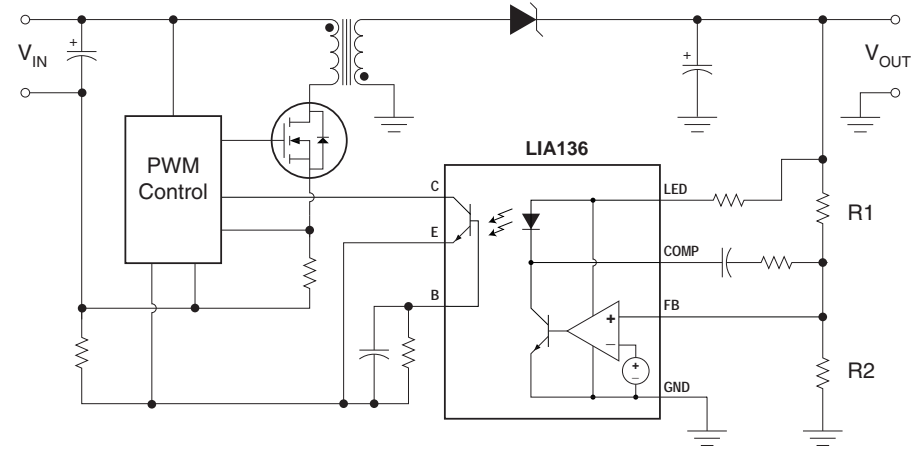


Part Number	Reference Voltage (V)	V <sub>REF</sub> Tolerance			Isolation Voltage (V <sub>rms</sub> )	Package Type
		25°C (%)	-40°C to +85°C (%)	-40°C to +125°C (%)		
LIA120	1.240	1	2.5	-	3750	8-pin surface mount
LIA130	1.240	1	1.5	-	3750	8-pin DIP, 8-pin surface mount
LIA135	1.299	0.5	1	-	3750	8-pin DIP, 8-pin surface mount
LIA136	1.299	0.5	-	1.5	3750	8-pin DIP, 8-Pin surface mount

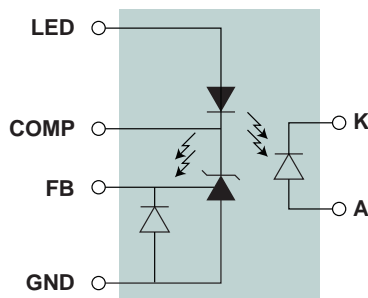


LIA120

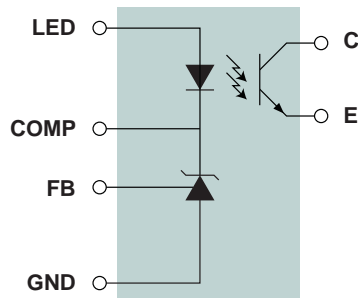

LIA130

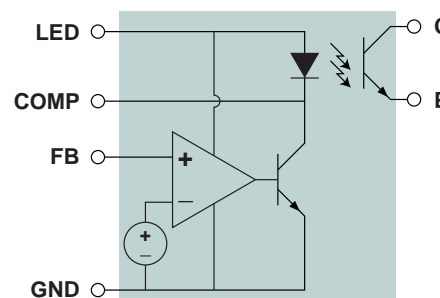

LIA135

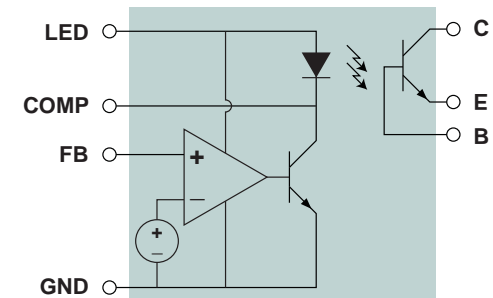

LIA136

K = Cathode, A = Anode  
 C = Collector, E = Emitter, B = Base  
 LED = LED Anode, COMP = Compensation, FB = Feedback, GND = Ground

# LIGHTING & DISPLAY PRODUCTS

## • HIGH VOLTAGE LED DRIVERS

### IX9908: High Voltage, Dimmable LED Driver with PFC Control

- Ideal for quasi-resonant flyback LED bulb designs
- Supports phase-cut dimming and power factor correction
- Multiple safety features ensure full system protection

#### Features:

- Single stage, primary control with PFC and dimming features
- >90% efficiency
- >98% power factor
- Wide operating voltage range: up to 600V
- Digital soft start
- Cycle-by-cycle peak current control

### CPC9909: High Efficiency, High Brightness Off-Line LED Driver

- 8V to 550V input voltage range
- Linear or PWM brightness control inputs
- Drives multiple LEDs in series/parallel

#### Features:

- >90% efficiency
- Stable operation at >50% duty cycle
- Regulated LED current
- Resistor-programmable minimum off-time
- Drives external power MOSFET, enabling high LED output current applications
- Buck or boost configuration




### MXHV9910: High Voltage, Off-Line LED Driver

- Signage, decorative LED lighting
- Flat-panel display RGB backlighting
- DC & AC/DC LED driver applications

#### Features:

- 8V to 450V input voltage range
- >90% efficiency
- Drives multiple LEDs in series/parallel combinations
- Regulated LED drive current
- Linear or PWM brightness control inputs
- Resistor-programmable oscillator frequency

IX9908  
Typical Application

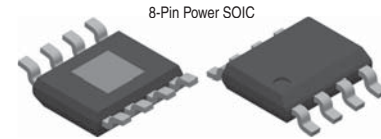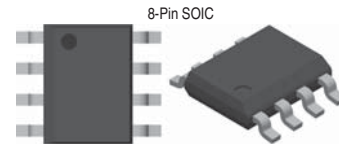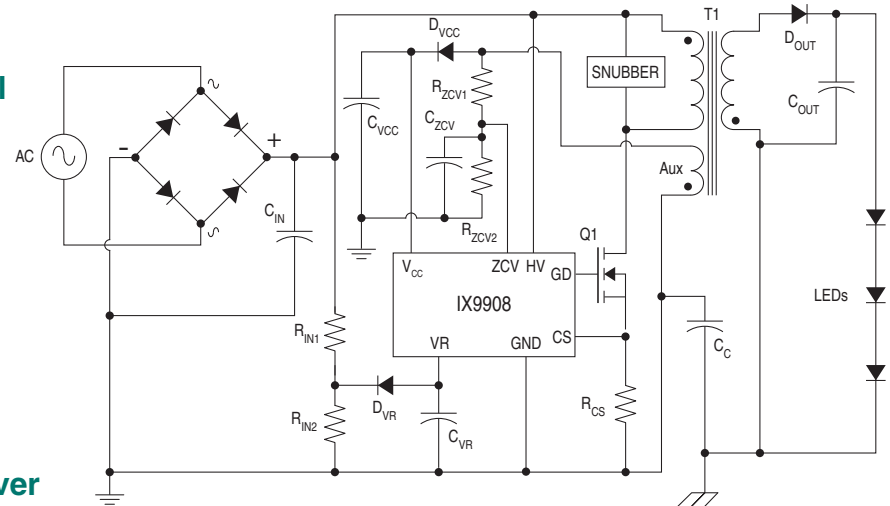

### NEW! Application Notes:

AN-302: IX9908 Design Considerations (nominal 115V<sub>rms</sub> - 60Hz)

AN-303: IX9908 Design Considerations (nominal 230V<sub>rms</sub> - 50Hz)

AN-304: IX9908 Design Calculator



## • ePAPER GATE & SOURCE DRIVERS

### IXEP1400: 400-Channel ePaper Source Driver


- 8-bit data bus inputs four 2-bit words at a time
- 400-bit long, 2-bit wide serial-input parallel-output digital shift register
- Operating temperature range: -40°C to +85°C
- Available as gold-bumped die in wafer form or waffle pack

#### Features:

- +/-15V output driver supply voltage
- Drives segment or active matrix displays
- 3-level gray scale
- 50MHz clock frequency
- Bidirectional data transfer
- 2.7V to 5.5V logic supply voltage
- Cascadable

#### Applications:

- eBooks & eReaders
- Electronic shelf labels & point-of-purchase displays
- Mobile phones & portable handheld devices
- Smart cards
- Signage

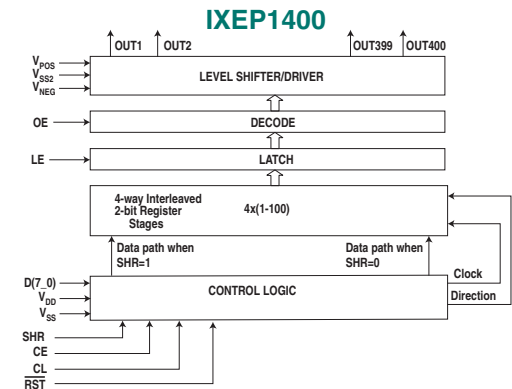

### IXEP2300: 300-Output ePaper Gate Driver


- Internal pattern generator enables minimal controller interface
- Global blanking and inversion facilitates power-up and power-down
- Token-passing capability
- Sleep mode reduces power consumption
- Available as gold-bumped die in wafer form or waffle pack

#### Features:

- 300 output gate driver
- 42V HV output drive capable ( $V_{DD}$  to  $V_{EE}$ )
- 3.3V logic operation
- Internal pattern generator
- Reset, blanking, polarity inversion
- Bypass function
- Cascadable with bidirectional shift control

#### Applications:

- eBooks & eReaders
- Electronic shelf labels & point-of-purchase displays
- Mobile phones & portable handheld devices
- Smart cards
- Signage

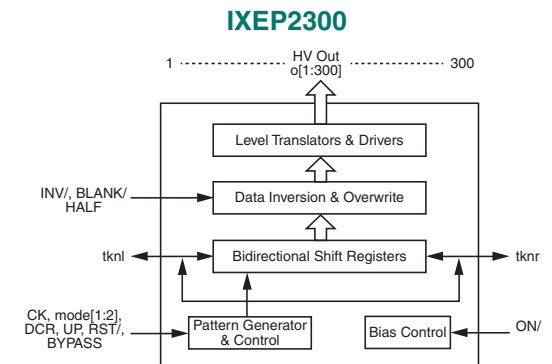


### MXEI2240: 240-Output ePaper Gate Driver

- Perfect for driving eBook and eReader displays, portable handheld devices, smart cards
- Output switching modes: one pulse, continuous two pulse, jumping two pulse, no pulse
- May be cascaded up to four deep
- Available as gold-bumped die in wafer form or waffle pack

#### Features:

- CMOS technology
- Drives segment or active matrix displays
- 16V to 57V output drive ( $V_{DD}$  to  $V_{EE}$ )
- Selectable output shift direction and polarity

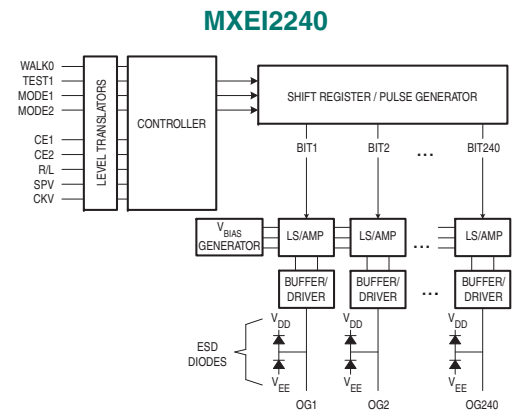

## MXE11480: ±15V Selectable 400/800 Channel ePaper Source Driver

- Perfect for driving eBook and eReader displays, portable handheld devices, smart cards
- Output switching modes: one pulse, continuous two pulse, jumping two pulse, no pulse
- May be cascaded up to four deep
- Available as gold-bumped die in wafer form or waffle pack

### Features:



- CMOS technology
- ±15V output driver supply voltage
- Drives segment or active matrix displays
- 4-level gray scale
- 25MHz clock frequency
- Bidirectional data transfer
- Selectable register length
- 2.7V to 5.5V logic supply voltage

## MX860: ±15V ePaper Source Driver

- Selectable 240-bit, 256-bit, 268-bit long, 2-bit wide serial-in, parallel-out shift register
- Level conversion on each output converts 2 digital bits into  $V_{POS}$ ,  $V_{SS}$ , or  $V_{NEG}$  output
- Available as gold-bumped die in wafer form or waffle pack

### Features:

- CMOS technology
- ±15V output driver supply voltage
- Drives segment or active matrix displays
- 4-level gray scale
- 25MHz clock frequency
- Bidirectional data transfer
- Selectable register length
- 2.7V to 5.5V logic supply voltage
- Cascadable

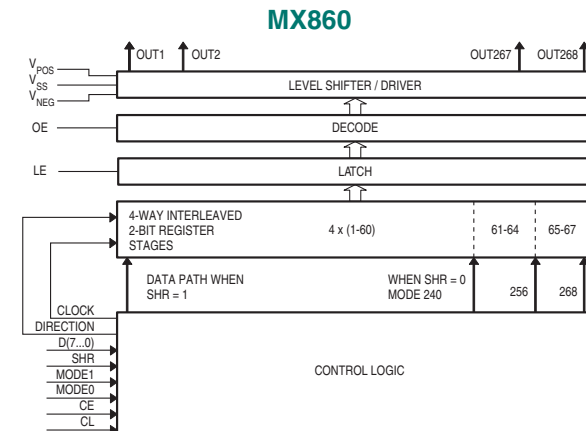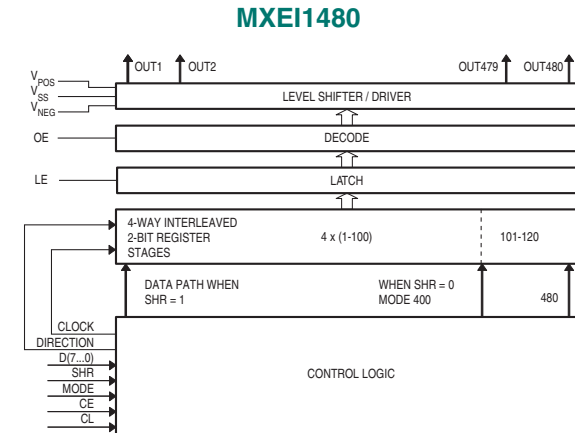


# TELECOMMUNICATIONS PRODUCTS

## LITELINK™ SILICON DAA PHONE LINE INTERFACE

- Industry's only single-package silicon Data Access Arrangement (DAA)
- Ideal for both voice and data (V.22bis to V.90/V.92) applications in particularly dense circuit environments
- Internal optical isolation barrier eliminates high-cost transformer or capacitive isolation circuits
- Saves cost through reduced passive component count and smaller printed circuit board space
- Available in a thin 32-pin SOIC package

Part Number	Isolation Voltage ( $V_{rms}$ )	Power Supply (V)	Caller ID	Ringing Detect
CPC5622	3000	3.3 - 5	Continuous	Half-wave & full-wave
CPC5621	3000	3.3 - 5	Selectable ( $\overline{CID}=0$ )	Full-wave ( $\overline{CID}=1$ )
CPC5620	3000	3.3 - 5	Selectable ( $\overline{CID}=0$ )	Half-wave ( $\overline{CID}=1$ )

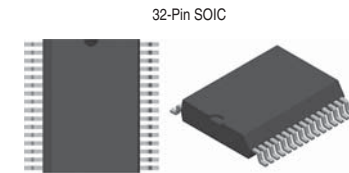

The  $3kV_{rms}$  internal isolation barrier exceeds all worldwide regulatory requirements. The LITELINK application circuit is capable of surviving 6kV ( $10\mu\text{sec} \times 700\mu\text{sec}$ ) lightning surge waveforms making it the most robust silicon DAA on the market.


LITELINK offers the lowest operational phone line quiescent current. The device easily interfaces to commonly available standard single-ended or differential voice and modem codecs on the market. Contact IXYS Integrated Circuits Division for information on codec reference designs that offer programmable AC termination impedance for global applications. LITELINK complies with international PSTN agency requirements.

### Features:

- Voice and data applications
- Modem DAA for speeds up to V.92
- Half-wave or full-wave ringing detection
- Worldwide telephone network compatibility
- Caller-ID reception
- Line side powered from telephone line
- 3.3V to 5V power supply
- Easy interface with modem ICs and voice codecs
- High power transmit option for voice applications ( $>3\text{dBm}$ )
- Small 32-pin SOIC package

### Applications:

- Computer telephony
- VoIP gateways
- PBXs
- Satellite set-top box
- V.92 modems
- Fax machines
- Voice mail systems
- Embedded modems
- Vending machines
- Automated banking
- Remote metering
- Surveillance
- Security systems

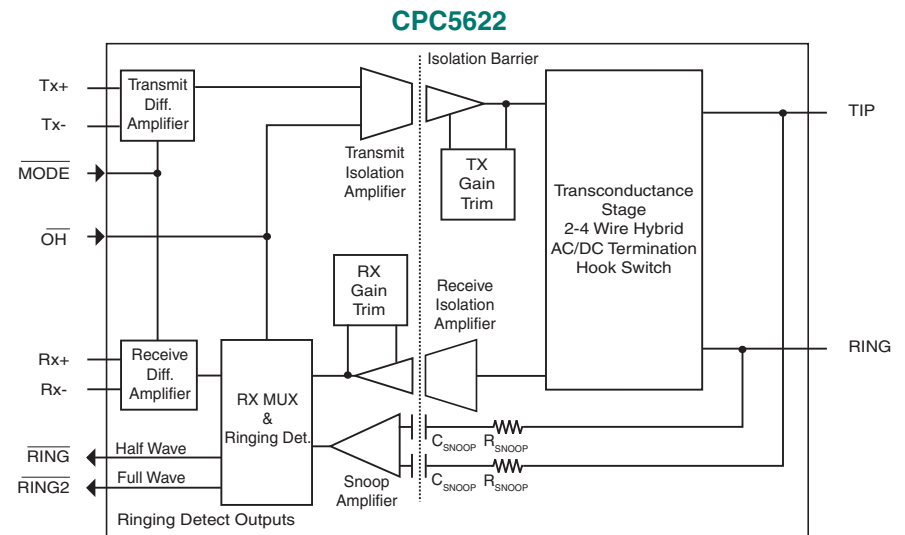



## VOLTAGE MONITOR DEVICES

### CPC5712

- Special-purpose “Voltage Monitor with Detectors” integrated circuit used in high voltage telephony applications
- Derives two voltage level detects, polarity information, and a scaled, linear representation of the phone line voltages
- Non-telephony applications include instrumentation and industrial controls; virtually undetectable in use

#### Features:

- 2 independent, programmable level-detectors with programmable hysteresis
- Fixed-level polarity detector with hysteresis
- Differential linear output
- Excellent common-mode rejection ratio (CMRR)
- Worldwide telephone network compatibility
- Minimum external components
- High differential input impedance, very low common-mode input impedance
- Fixed gain
- 3V to 5.5V operation
- Low power consumption
- CMOS logic level output (TTL compatible)

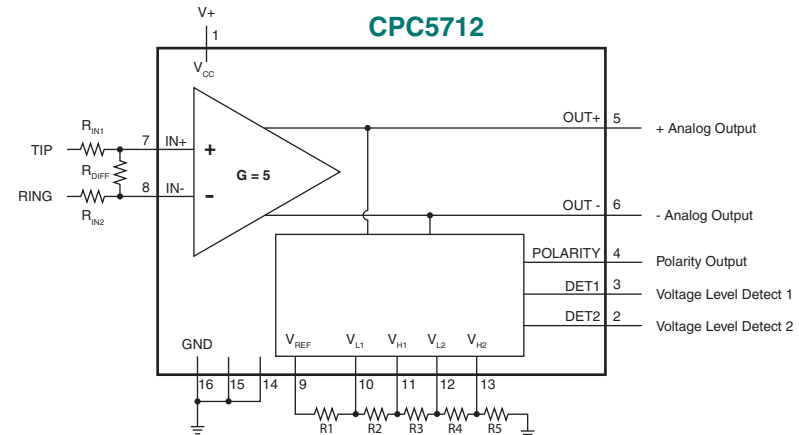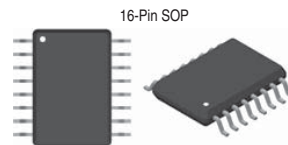

Resistors set the Voltage Level Detect Thresholds

#### Applications:



- VoIP gateways, IP-PBX, xDSL
- TIP/RING monitoring: polarity detection for caller ID, enhanced 911, line-in-use, battery detection, PSTN check

### CPC5710

- Telephone line monitor circuit provides linear representation of phone line signal and a ringing detect signal
- Ringing detect signal is set by external resistor network
- Virtually undetectable in use

#### Features:

- Differential or single-ended linear output
- Full-wave ringing level detector comparator with internal threshold, large hysteresis, and TTL logic level output
- High common-mode rejection ratio (CMRR)
- Worldwide telephone network compatibility
- High differential input impedance, very low common-mode input impedance
- Fixed gain
- 3V to 5.5V operation
- CMOS logic level output (TTL compatible)

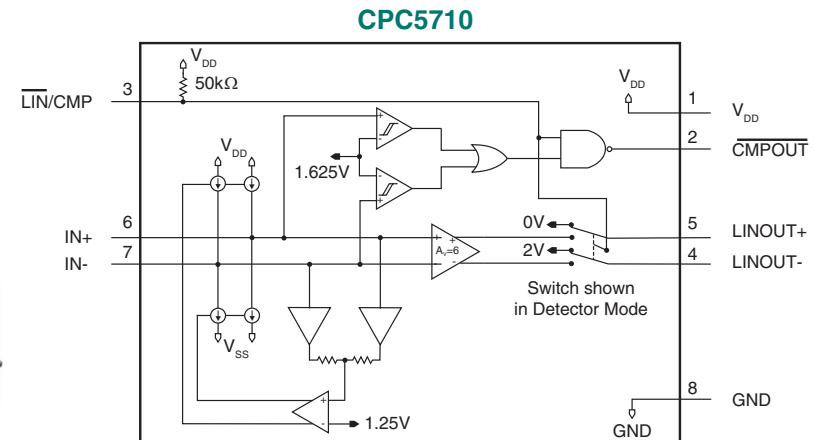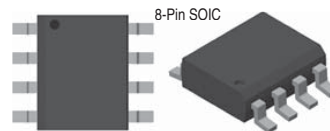

#### Applications:


- Display feature (caller ID) signal buffering
- Line-in-use detection (another-phone-off-hook)
- Battery presence monitoring
- TIP/RING voltage monitoring
- Line polarity

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)


## • SINGLE-CHANNEL VOICE-BAND CODEC: CPC5750

### Features:

- $\mu$ -law and A-law ITU G.711 companding codec
- Operates on +3.3V power
- Differential analog signal paths
- Programmable transmit and receive gain, +/-12dB in 0.1dB increments
- Transmit path 60Hz rejection filter
- Differential amplifier drives +3.2dBm into 600 $\Omega$
- Stable gain over temperature
- PCM and IOM-2 GCI telecommunication interfaces
- Short and long frame syncs supported
- Independent transmit and receive programmable time slots
- Accepts PCLK from 512kHz to 8.192MHz
- SPI serial interface for control in PCM mode
- Programmable power down-mode,  $I_{DD} = 20\mu A$
- Analog and digital loopback modes for testing

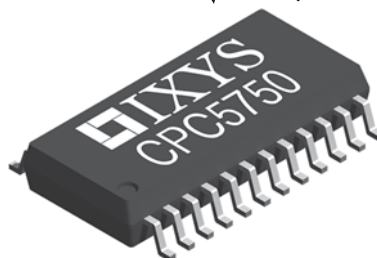

CPC5750 Block Diagram

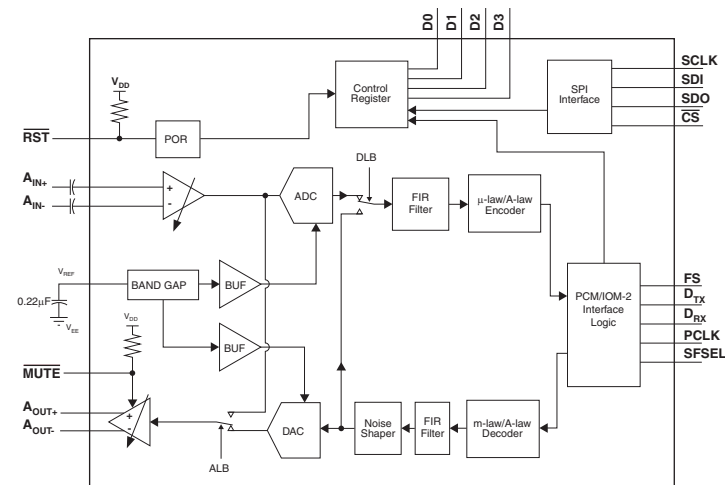

## • CALL PROGRESS TONE DETECTOR: M-980-02

- Detects common call progress tones including busy tone, dial tone, call waiting tones, and others
- Operates on a 3V to 5V supply



### Features:

- Receive common call progress tones
- The M-980-02 operates with a single 3-5 volt supply
- Linear input (detector)
- Inexpensive band detector with wide dynamic range (>38dB)
- Low power consumption


### Applications:

- PBX circuits
- Billing systems
- Test equipment
- Point-of-sale terminals

Part Number	Function (315 - 640Hz)	Package Types
M-980-02	Tone detector	16-pin SOIC, 8-pin DIP



M-980-02: Call Progress Tone Detector

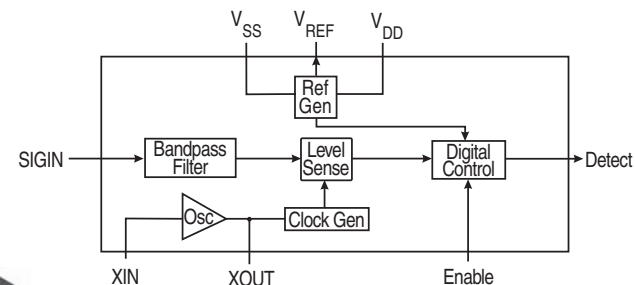

## • DC TERMINATION ICs (xDSL, ISDN)

### CPC1465: SHDSL/ISDN


- Polarity-insensitive DC termination for wetting (sealing) current on the CPE side
- Conforms to ITU-T G.991.2 to eliminate corrosion on G.SHDSL/ISDN lines
- Well controlled turn-on and turn-off minimizes injecting impulse noise into the G.SHDSL channel

#### Features:


- Integrated bridge rectifier for polarity correction
- Uses inexpensive optocoupler for DC signaling
- Electronic inductor, breakover, and latch circuits
- Current limiting and excess power protection circuits
- ANSI SHDSL and ISDN compatible
- MLT and SARTS compatible
- Excellent linearity (70dB typ.)

#### Applications:

- G.SHDSL
- ISDN
- Router and bridge customer premises equipment
- Leased line equipment
- T1/E1 network line cards and repeaters
- Network termination 1 (NT1) equipment
- Mechanized loop test (MLT) networks
- Switched access remote test system (SARTS) networks

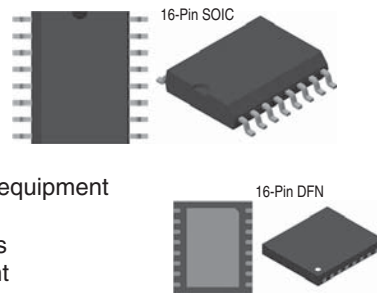


### CPC1465 & Application Circuit

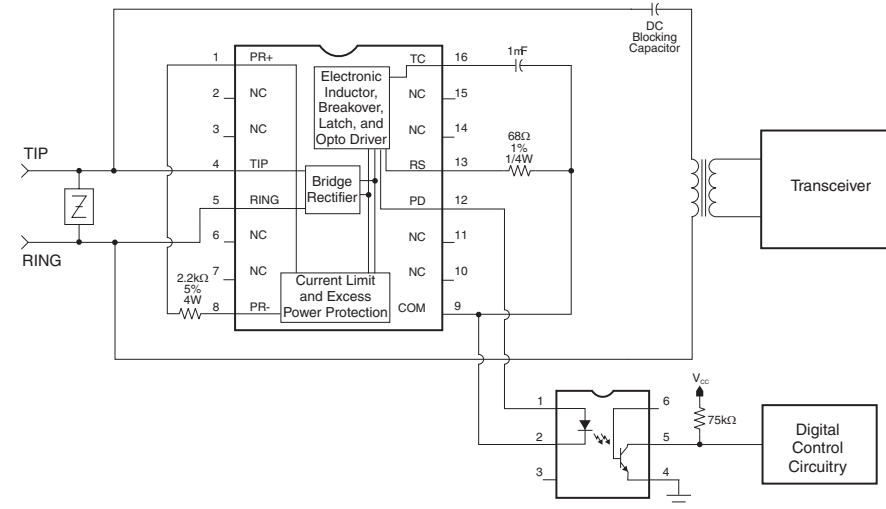

### CPC1466: Broadband ADSL/VDSL

- DC Termination IC for broadband ADSL/VDSL applications
- Eliminates phone line corrosion on DSL twisted-pair, broadband-only lines

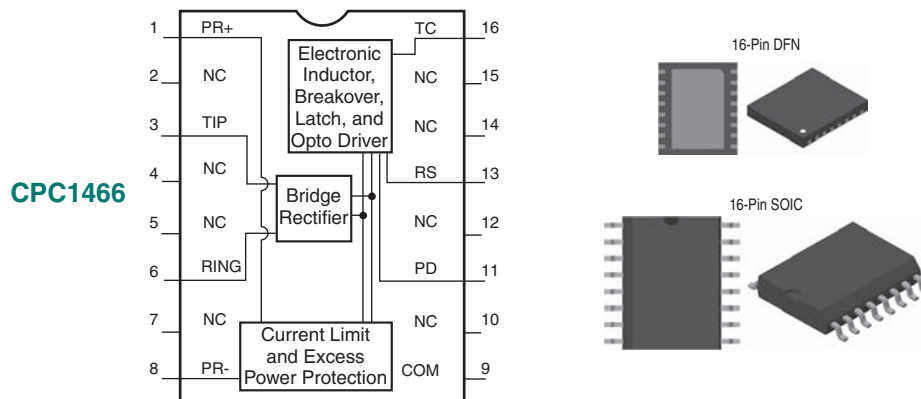

#### Features:

- Meets wetting (sealing) current requirements per ITU-T G.992.3
- Integrated bridge rectifier for polarity correction
- Uses inexpensive optocoupler for DC sealing current monitoring
- Electronic inductor, breakover, and latch circuits
- Current limiting and excess power protection circuits
- ADSL/VDSL compatible with low-pass filter network
- MLT and SARTS compatible
- Compatible with portable test sets

#### Applications:

- ADSL/VDSL broadband modems
- Router and bridge customer premises equipment
- Leased line equipment
- Mechanized loop test (MLT) networks
- Switched access remote test systems (SARTS) networks

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)






# • LINE CARD ACCESS SWITCHES (LCAS)

## Features:

- Monolithic IC reliability
- Impulse noise reduction
- Low, matched on-resistance
- Built-in zero-cross ringing switching
- Small surface mount SOIC packages
- Ultra-low power consumption of <10.5mW
- Robust power-cross and lightning surge performance
- Current limiting, thermal shutdown, and SLIC protection
- CPC75282: dual, 6-pole device

## Applications:

- PBX systems
- VoIP gateways
- Channel banks
- Pair gain systems
- Central offices (CO)
- Fiber in the loop (FITL)
- Hybrid fiber coax (HFC)
- Digital loop carriers (DLC)
- Digitally added main line (DAML)

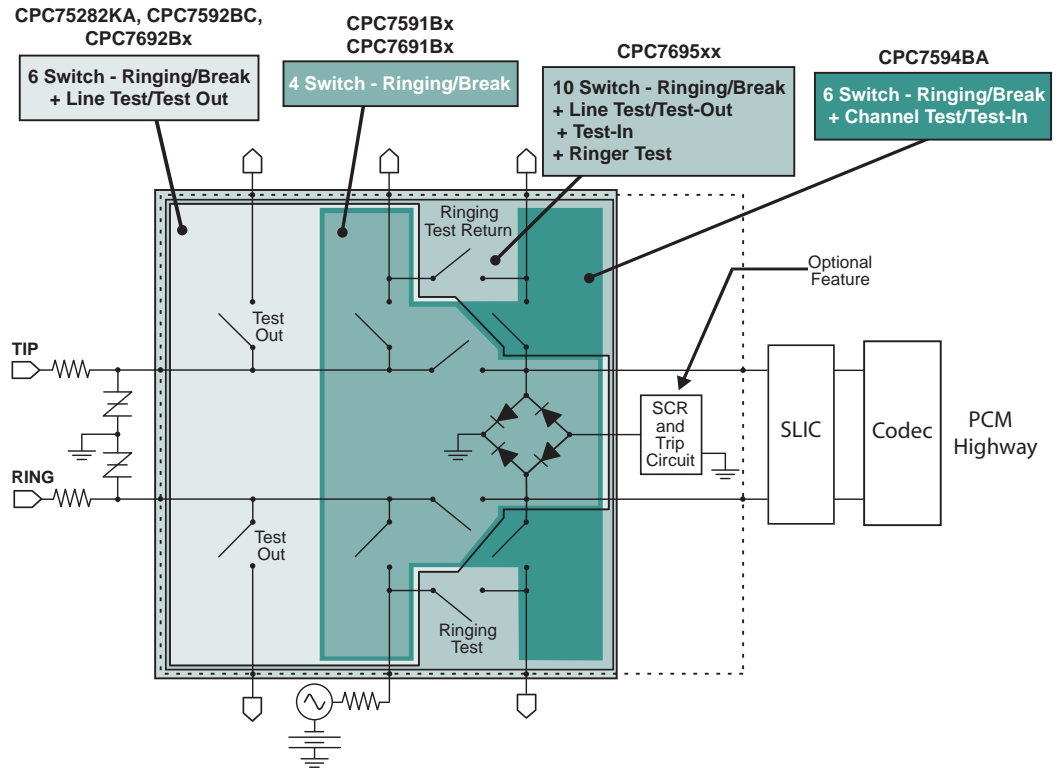

Part Number	Minimum 1500V/ $\mu$ s dV/dt	Switch Pairs					Zero-Cross Switching	Current Limit	Protection Features			Logic States	Package Type
		# Switches	Break	Ringing	Test Out	Test In			Diode Bridge	Protection SCR	Minimum Hold Current (mA)		
CPC7691BA	•	4	•	•			•	•	•	•	110	3	32
CPC7691BB	•	4	•	•			•	•	•	•	110	3	32
CPC7692BA	•	6	•	•	•		•	•	•	•	110	4	32
CPC7692BC	•	6	•	•	•		•	•	•	•	110	5	32
CPC7695xA	•	10	•	•	•	•	•	•	•	•	110	7	8, 34
CPC7695xB	•	10	•	•	•	•	•	•	•	•	110	7	8, 34
CPC7695xC	•	10	•	•	•	•	•	•	•	•	110	8	8, 34
CPC7591BA		4	•	•			•	•	•	•	110	3	32
CPC7591BB		4	•	•			•	•	•	•	110	3	32
CPC7592BC		6	•	•	•		•	•	•	•	110	5	32
CPC75282 Dual		6	•	•	•		•	•	•	•	110	6	46

## • LCAS FOR RINGING SLIC: CPC7508



- Next generation LCAS device used with ringing SLICs
- Replaces the two 2-Form-C electromechanical test relays used in fiber-to-the-home and optical network deployments
- Provides TIP and RING line break, drop test, and channel test functionality
- Requires only a single +12V supply

### Features:

- TTL logic level inputs for 3.3V logic interfaces
- Smart logic for power-up & hot-plug state control
- Monolithic IC reliability
- Low, matched  $R_{ON}$
- Clean, bounce-free switching
- Tertiary protection consisting of integrated current limiting and thermal shutdown for SLIC protection

### Applications:

- Fiber to the home (FTTH)
- Fiber in the loop (FITL)
- VoIP gateways
- PBX systems
- Digitally added main line (DAML)
- Hybrid fiber coax (HFC)

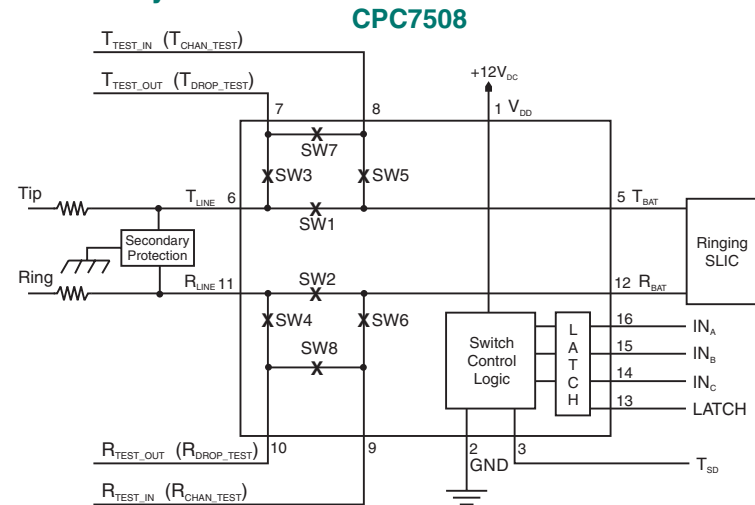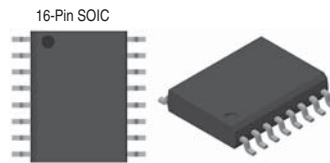

## • CYBERGATE™ DATA ACCESS ARRANGEMENT (DAA) MODULES

- Completely functional V.34 DAA circuit in a 1.07" x 1.07" x 0.4" plastic module
- Surge protection, transient protection Zener diodes, ringing detection, hook switch, gyrator, and a transformer
- Caller-ID (CID) and loop current detection are also available as options

Part Number	Region	Features				
		Ringing Detection		Caller ID	Loop Current Detect	2-4 Wire Conversion
		Full Wave	Half Wave			
CYG2000	N. America, Asia		•			
CYG2011	N. America, Asia	•			•	
CYG2020	N. America, Asia		•	•		
CYG2100	European Union Except France & Spain		•			
CYG2110	France		•			
CYG2111	CTR-21		•			
CYG2217	N. America, Asia		•			•
CYG2218	N. America, Asia		•			•
CYG2320	Australia		•			

### Features:


- 28.8kbps
- Optional caller ID and loop current sense
- Ringing detection
- Low power hook switch
- Surge protection
- Gyrator circuitry
- Meets most regulatory agency requirements

### Applications:

- Modems
- Remote data acquisition
- Fax machines
- Security/metering
- Computer telephony
- PBX
- Voice mail systems

### Small Package Size!

1.07" x 1.07" x 0.4"  
27.18mm x 27.18mm x 10.16mm

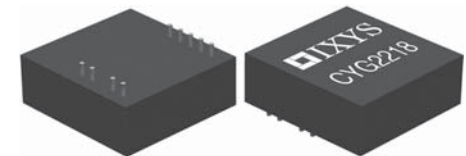

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)



## • EMBEDDED MODEM MODULE: CPC2400E



- All-in-one DAA solution for V.22bis modem transaction-oriented applications includes datapump and microcontroller
- Plug-and-play module provides a total solution complete with transferable FCC registration
- Standard serial V.24 TTL interface to DTE equipment features fast handshake time of 1.6 seconds

### Features:

- Easy integration and installation
- Small footprint of 1.00" x 2.50"
- Low power consumption
- 5V power supply operation
- Supports V.22bis, V.22, V.23
- FCC Part 15B compliant
- FCC Part 68 user transferable registration
- UL approved

### Applications:



- Point-of-sale (POS)
- Gaming equipment
- Utility metering
- Lock boxes
- Remote monitoring
- Embedded applications
- Medical appliances

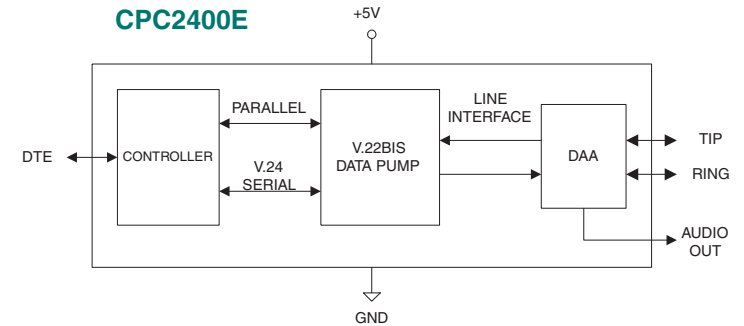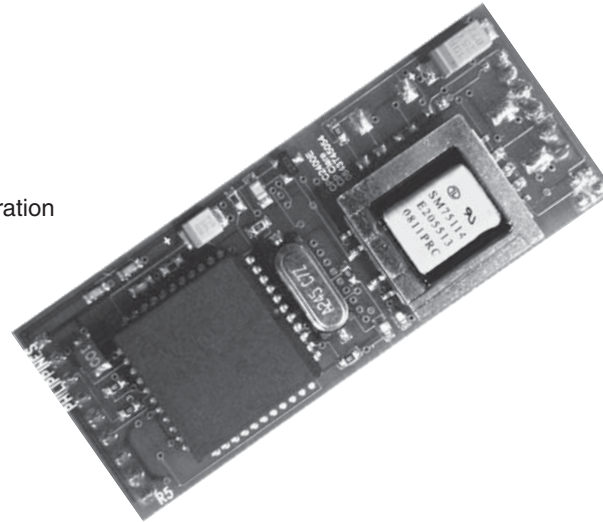

## • LINE SENSE RELAY: M-949-11


### M-949-11 Balanced Dual Coil Telephone Line Current Sensing Relay

- Senses telephone line current from 15mA to 200mA
- Used by control circuitry for:
  - On-hook/off-hook monitoring
  - Switch hook flash detection
  - Rotary dial pulse
- Meets high isolation voltage requirement of 4000V
- Meets UL and British Standard Specifications
- Includes 1-Form-A relay contact

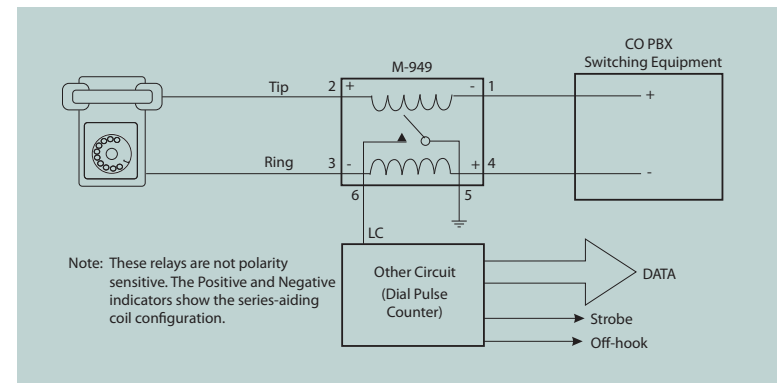


## • TELECOM MULTIFUNCTION PRODUCTS (GENERAL PURPOSE MULTIFUNCTION PRODUCTS - PAGE 18)

The OptoMOS line of Telecom Multifunction Products combines a number of discrete optically isolated functions into a single package. These products mix and match solid state relays, optocouplers, bridge rectifiers, Darlington transistors, and Zener diodes to create highly functional circuits in a single, small package. Multifunction devices allow designers to consolidate circuit functions into a single device, freeing up valuable board space and reducing component count. Designed specifically for the telecommunications industry, the Integrated Telecom Circuit (ITC) series is well suited for voice telephony and modem applications, providing most of the major functions required when designing DAA (Data Access Arrangement) or voice (FXO) line interface circuits. Available in a 16-pin SOIC package.

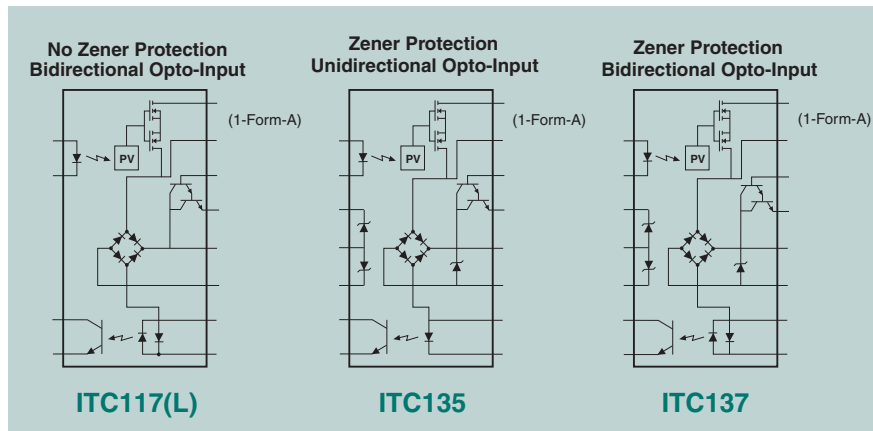

### Features:

- 3750V<sub>rms</sub> input-to-output isolation
- Multiple functionality in a single package
- Current limiting (part numbers with “L” suffix)
- Machine insertable, wave solderable
- TTL and CMOS compatible

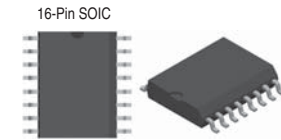

### Applications:

- Telecommunication/datacommunication
- Instrumentation
- I/O subsystems
- Electronic switching
- Medical equipment (patient/equipment isolation)
- Security
- Aerospace
- Industrial controls

Part Number	Relay Parameters				Optocoupler Parameters				Isolation Voltage (V <sub>rms</sub> )	Package Type	Features
	Blocking Voltage (V <sub>p</sub> )	Load Current (mA)	On Resistance (Ω)	Input Control Current (mA)	Breakdown Voltage (V)	Current Transfer Ratio (%)	Saturation Voltage (V)	Input Control Current (mA)			
ITC117	350	120	15	5	20	33	0.5	6	3750	16-Pin SOIC	Full-wave ringing detect
ITC117L	350	120	20	5	20	33	0.5	6	3750	16-Pin SOIC	Full-wave ringing detect, current limiting
ITC135	350	120	15	5	20	33	0.5	6	3750	16-Pin SOIC	Half-wave ringing detect
ITC137	350	120	15	5	20	33	0.5	6	3750	16-Pin SOIC	Full-wave ringing detect

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

+1 978 524 6700, +1 978 524 4700 – Customer Service +1 978 524 6768, +1 978 524 4900

# RFID PRODUCTS


## • RFID TAGS

### **NCD1015ZP: Low Frequency, Half-Duplex, Robust 50mm Transponder**

- Read-Only RFID device for single transponder applications in the area of electronic identification
- Supports ISO 11784/85 standards

The passive transponder uses the applied RF signal to obtain the energy needed to send the 64-bit ID code to the reader. Return data transmission from the transponder to the reader utilizes FSK encoded modulation.

- Air interface • Contact-less, sequential power & data transmission (HDX)
- Radio frequency center frequency • 134.2 kHz
- Tag-to-reader transmission • FSK modulation, NRZ: "0" ~ 134.4kHz; "1" ~ 124.2kHz
- Tag-to-reader data rate • RF/16 (~8kbits/sec)
- On-chip 16-bit CRC generator • Reverse CRC-CCITT as used in ISO/IEC 11785
- Identification data page • 64 bits data + 16 bits CRC

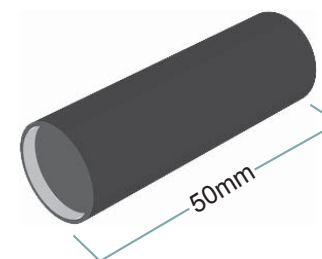

### **NCD1015M: Low Frequency, Half-Duplex RFID Integrated Circuit**

- HDX (R/W) RFID device for single transponder applications in the area of electronic identification
- Supports ISO 11784/85 standards

The NCD1015M contains an ASIC and 2 internal capacitors: one, a resonant capacitor, and the other a storage capacitor. The ASIC contains 3 memory blocks of 32 bits each, based on field programmable, non-volatile EEPROM. Each block contains 32 data bits. Blocks 1 and 2 are referred to as the 64-bit identification data page 1, which is secured by an associated 16-bit CRC. Block 0 offers the option to lock the RFID device. Once the device is locked, it is compatible with ISO 11784/85 standards.

The HDX transponder IC receives Write-Block requests from the reader as a pulse interval encoded, 100% amplitude modulated data signal.

Return data transmission from the transponder to the reader utilizes FSK encoded modulation. This is achieved by a serial data stream controlled Frequency Shift Keying (FSK) of the transponder's resonant circuit oscillation with an additional on-chip modulation capacitor between the two transponder terminals HF and GND. The passive transponder uses the supplied RF signal to obtain the energy needed to send the 64-bit ID code to the reader.

- Air interface • Contact-less, sequential power & data transmission (HDX)
- Radio frequency center frequency • 134.2 kHz typically
- Reader-to-tag transmission • Pulse interval encoding (PIE) ~1 to 2kBits/s
- Tag-to-reader transmission • FSK modulation, NRZ: "0" ~134.2kHz; "1" ~124.2kHz
- Tag-to-reader data rate • RF/16 (~8kbits/sec)
- On-chip 16-bit CRC generator • Reverse CRC-CCITT as used in ISO/IEC 11785
- Identification data • 64 bits data + 16 bits CRC



# OTHER SEMICONDUCTOR PRODUCTS

## • NON-VOLATILE DIGITAL PROGRAMMABLE CAPACITOR: NCD2100

The NCD2100 is an EEPROM-based digitally programmable variable capacitor that provides capacitive offset trimming for capacitance sensitive circuits. Programming the non-volatile EEPROM register value or implementing on demand capacitance value changes are easily accomplished by means of the simple two-wire serial bus.

Providing 1024 discrete capacitance values over a nominal value range of 6.6pF to 37.553pF with very small step sizes, the NCD2100 is well suited to ensure proper operation of capacitive critical circuits. Additionally, to ensure interoperability over a broad array of design environments, the device is rated for operation with supply voltages of 2.5V to 5.5V across the temperature range of -40°C to +85°C.

### Features:

- Very small CDAC3 capacitance step size: 0.063pF
- 1024 programmable capacitance values
- Operating frequency up to 250MHz  
(contact the factory for operation at higher frequencies)
- Operating supply voltage: 2.5V to 5.5V
- Operating temperature range: -40°C to +85°C
- Device size: 2mm x 2mm (DFN-6), 2.9mm x 2.8mm (TSOT-6)

### Applications:


- VCXOs
- Crystal oscillators
- Tunable RF stages
- RFID tags
- Industrial wireless control
- Capacitor sensor trimming




TSOT Package: 2.8mm x 2.9mm



DFN Package: 2mm x 2mm

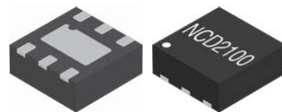

Capacitance range: 6.6pF to 37.553pF

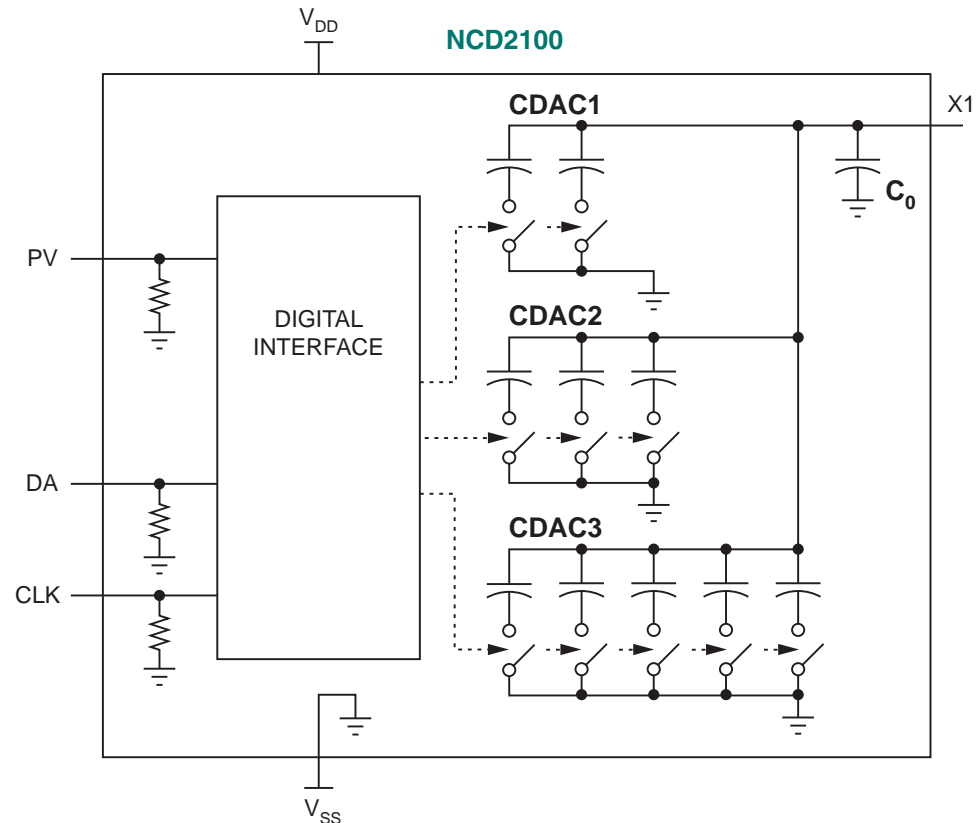

## • HALL-EFFECT SWITCHES: MX887D & MX887P



The **MX887D** and **MX887P** integrated Hall-Effect switches target the requirements of low-power portable devices with battery operating voltages from 2.5V to 5.5V. On-chip power management circuitry reduces the effective average current to just 5µA at 3V supply voltage.

Both devices turn on when either a north or south magnetic pole is applied, and turn off when the magnetic field is removed. The MX887D switches between GND and high-impedance state, while the output of the MX887P switches between the supply voltage and GND.

MX887D and MX887P are ideal reed relay replacements, especially in low-power portable device applications. Available in a TSOT-23 package.

### Applications:

- Handheld portable devices
- White goods
- Automotive - body systems
- Security systems
- High-reliability reed switch replacement

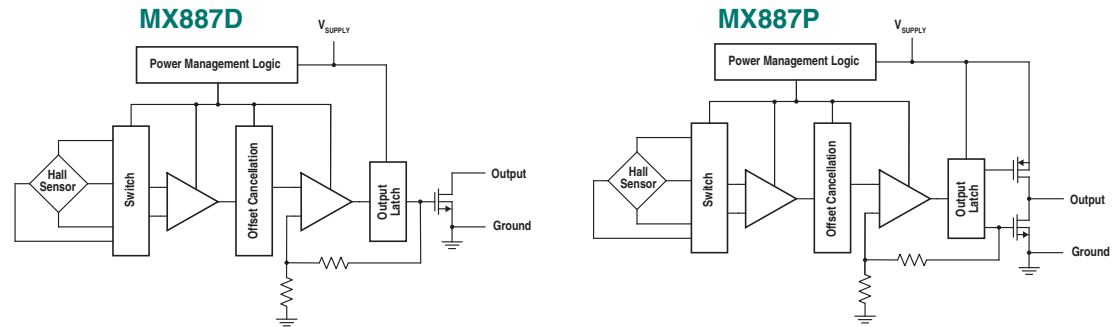

## • LOAD DRIVER: MX877

- 8-channel, high voltage switch with 8-bit parallel or serial input control
- 3-wire serial interface connects directly to a microprocessor using an industry standard protocol
- Designed to operate over a temperature range of -40°C to +85°C



The **MX877**, with push-pull output configuration, can drive up to 80mA at 60V. Outputs can be paralleled for increased drive current up to a device total of 400mA sink or source.

### Features:

- 6V to 60V drive supply voltage
- 2.7V to 5.5V logic supply range
- 3-wire serial interface plus chip select
- Captures serial and parallel input data
- Outputs can be paralleled
- Small 28-pin QFN package

### Applications:

- White goods
- Automatic test equipment (ATE)
- Industrial equipment
- Automotive relay control

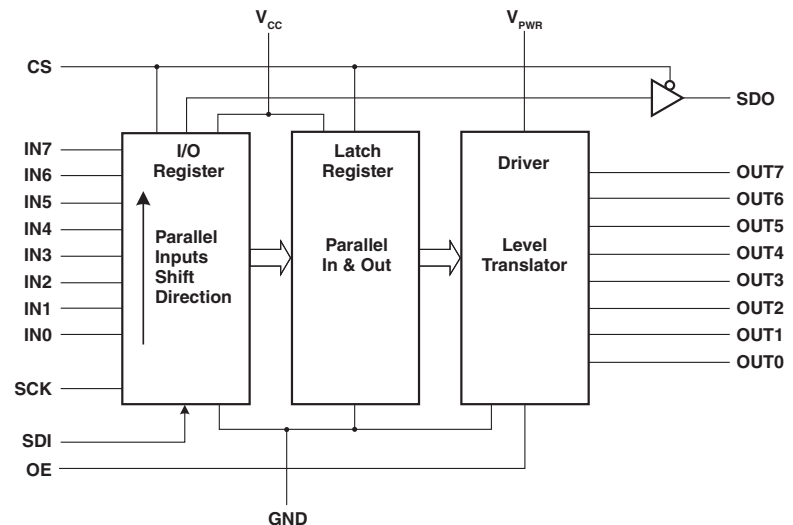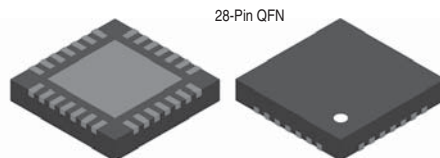

For data sheets, go to [www.ixysic.com/Products/ProdList.htm](http://www.ixysic.com/Products/ProdList.htm)

# Worldwide Sales Offices

## AMERICAS

World Headquarters  
IXYS Integrated Circuits Division  
78 Cherry Hill Drive  
Beverly, MA USA 01915-1048

☎ +1 978 524 6700  
✉ +1 978 524 4700  
Toll-Free: 1 800 272 5273

## CUSTOMER SERVICE

☎ +1 978 524 6768  
✉ +1 978 524 4900

## EUROPE

European Customer Service Centre  
IXYS Semiconductor BV  
Schipholweg 103  
2316 XC Leiden, Netherlands

☎ +31 71 303 1500  
✉ +31 71 524 9237  
E-mail: [customerservice@ixys.de](mailto:customerservice@ixys.de)

## ASIA

Asian Headquarters  
IXYS Taiwan  
Room N1016, Chia-Hsin, Bldg. II,  
10F, No. 96, Sec. 2  
Chung Shan North Road  
Taipei, Taiwan

☎ +886 2 2523 6368  
✉ +886 2 2523 6369  
E-mail: [sales@ixysic.com.tw](mailto:sales@ixysic.com.tw)

**IXYS Integrated Circuits Division**

Copyright © December 2016, IXYS Integrated Circuits Division Inc. All rights reserved.  
[www.ixysic.com](http://www.ixysic.com)

## Модули IGBT ixys купить в Минске

[www.fotorele.net](http://www.fotorele.net) [www.tiristor.by](http://www.tiristor.by) радиодетали, электронные компоненты  
email [minsk17@tut.by](mailto:minsk17@tut.by) tel.mob +375 44 758 47 80 velcom +375 29 758 47 80 МТС

Мы не работаем с частными (физическими) лицами.

Мы работаем только с юридическими лицами(организациями) и ИП и только по безналичному расчёту.  
подробно смотрите ниже: описание, характеристики, datasheet QR код

## Модуль, igbt, ixys купить в Минске

[www.fotorele.net](http://www.fotorele.net) [www.tiristor.by](http://www.tiristor.by) радиодетали, электронные компоненты  
email [minsk17@tut.by](mailto:minsk17@tut.by) tel.mob +375 44 758 47 80 velcom +375 29 758 47 80 МТС

подробно смотрите ниже: описание, технические характеристики, datasheet, фото, каталог

QR код

YS

